

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970

UBER

3 16 149

FOR CORNERS OF—	LOCATED IN—	CORNER CODE NUMBER	FILED
1. PUBLIC LAND SURVEY 31	1 N. R. 1 W.	A-13	JUL 11 10 56 AM '74 REGISTER OF DEEDS <i>Carol M. Lewis</i> INGHAM COUNTY, MICH.
2. PROPERTY CONTROL- ING IN SECTION 31	1 N. R. 1 W.	A-13	
3. MISCELLANEOUS PROPERTY IN SECTION	1 N. R. 1 W.		
4. LOT NO.	RECORDED PLAT		
5. PRIVATE CLAIMS			

REGISTER OF DEEDS STAMP AND
FILING NUMBER

I, **D. Scott** do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970 the corner points mentioned in lines 1 and 2 above identified with circles on index code diagram—over—were, in a field survey on **June 1974**, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on **June 1974**, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

A-13 - Set corner
 S 61-1/2° E 20 Links 16" Elm
 N 42° E 18 Links 9" Elm

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

A-13 - Found pointed stone set by Aaron Jackson in 1856.
 Replaced with 20' dia. concrete monument with 2' dia. brass cap.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

A-13 - 20' dia. concrete monument with 2' dia. brass cap.
 S 78° E 31.16' Clump 5 Maple
 S 00° 07' 36" W 50.0' Concrete mon. 12" dia., 18" high
 S 89° 31' 09" E 50.0' Concrete mon. 12" dia., 18" high
 N 3° W 42.30' 8" Maple

SIGNED BY: *D. Scott*
 SURVEYOR'S MICHIGAN REGISTRATION NO. **12029**

DATE **8 JUL 9 1974**

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY: _____ DATE: _____
 CHIEF OF SURVEY PARTY

APPROVED AND SIGNED BY: _____ DATE: _____
 MICHIGAN REGISTERED LAND SURVEYOR

SURVEYOR'S MICHIGAN REGISTRATION NO. _____

Form No. MLM735
 DOWNEY BROS. & CO., KALAMAZOO, MICH.

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 28, 1971
 DISTRIBUTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS


CORNER NUMBERING CODE DIAGRAMS FOR IDENTIFYING LAND CORNER RECORDATIONS AND INDEXING

FOR PUBLIC LAND SURVEY CORNERS IN THE
T. 1N , R. 1E (MENTIONED OVER)

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

Apply letter prefix for corner points encircled above for identifying corner recordation numbers over.

FOR PROPERTY CONTROLLING AND MISC.
PROPERTY CORNERS WITHIN THE SECTION
(MENTIONED OVER AND EXCLUDE LOT CORNER)

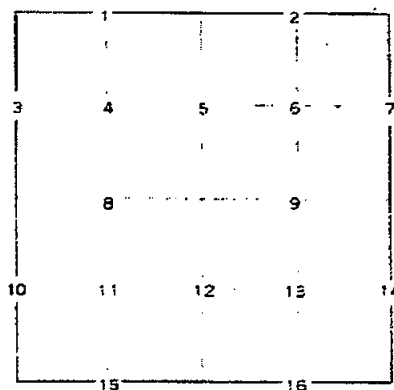

1. Above coded numbers are positioned on 1-16 fractional lines of the section.
2. Township corner code numbers shall be applied to corners of above typical section not numbered.
3. Miscellaneous property corners within a section, located at points other than numbered above, shall be referenced to at least two of above corner code numbers.
4. Private claim corners to be tied to rectangular land corners if possible - sketch required below.

EXPLANATORY SKETCH IF NECESSARY -- BELOW

11-6273 *000500

MRS

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970

LIBER

3 PG 151

FILED

FOR CORNERS OF-- LOCATED IN-- CORNER CODE NUMBER

1. PUBLIC LAND SURVEY 31 1 1 N. R. 1 1 C-11, C-12, C-13

2. PROPERTY CONTROLLING IN SECTION 31 1 1 N. R. 1 1 C-11, C-12, C-13

3. MISCELLANEOUS PROPERTY IN SECTION 1 1 N. R. 1 1

4. LOT NO. RECORDED PLAT

JUL 11 10 56 AM '74
REGISTER OF DEEDS
Curt M. Lewis
INGHAM COUNTY, MICH.

5. PRIVATE CLAIMS

REGISTER OF DEEDS STAMP AND
FILING NUMBER

I, **D. Scott** do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970 the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram) were, in a field survey on **September 27, 1973**, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3 and 4 above were, in a field survey on **September 27, 1973**, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

C-11 - Found patched 4' square hole in blacktop with 1/2" iron rod in center.
C-12 - Found patched 4' square hole in blacktop with 1/2" iron rod in center.
C-13 - Found boat spike 2" below surface. Replaced with 1" x 30" iron pipe.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-11 - NE Corner Section 31, T1N, R1E	East	30.00'	Iron Axle
N88°W, 31.00' Fence Corner Post	S25°E	50.84'	42" Black Oak
S26°W, 77.88' 7" Black Oak	S78°E	50.36'	22" Black Oak
C-12 - E 1/4 Corner Sec. 31, T1N, R1E	S23°W	111.44'	28" Black Oak
N65°E, 48.97' 4" Conc. Mon. U.S. GSBM	N52°E	48.46'	30" Maple
N31°W, 50.57' 6" Shag Bark Hickory	N32°W	35.82'	Telephone Anchor Pole
C-13 - SE Corner Section 31, T1N, R1E	S82°W	27.29'	24" Black Oak
S20°E, 62.11' 25" Black Oak	S67°E	29.71'	26" White Oak
	S35°W	47.73'	10" White Oak

SIGNED BY *D. Scott*

DATE *8 July 74*

SURVEYOR'S MICHIGAN REGISTRATION NO. **12029**

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY _____ CHIEF OF SURVEY PARTY

DATE _____

APPROVED AND SIGNED BY _____ MICHIGAN REGISTERED LAND SURVEYOR

DATE _____

(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO. _____

Form No. MLM735
DORSEY & SONS, S. CO., KALAMAZOO, MICH.

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 28, 1971
DISTRIBUTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS


CORNER NUMBERING CODE DIAGRAMS FOR IDENTIFYING LAND CORNER RECORDATIONS AND INDEXING

FOR PUBLIC LAND SURVEY CORNERS IN THE
T. IN R. IE (MENTIONED OVER)

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

Apply letter prefix for corner points encircled above for identifying corner recordation numbers over.

FOR PROPERTY CONTROLLING AND MISC.
PROPERTY CORNERS WITHIN THE SECTION
(MENTIONED OVER AND EXCLUDE LOT CORNER)

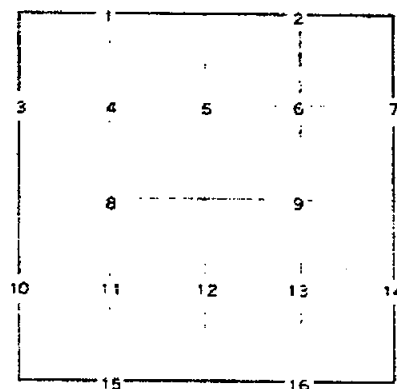

1. Above coded numbers are positioned on 1 to 16 fractional lines of the section.
2. Township corner code numbers shall be applied to corners of above typical section not numbered.
3. Miscellaneous property corners within a section, located at points other than numbered above, shall be referenced to at least two of above corner code numbers.
4. Private claim corners to be tied to rectangular land corners if possible - sketch required below.

EXPLANATORY SKETCH IF NECESSARY -- BELOW

1146273 *000500 MMS