

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT. 74, MICH. P.A. 1970

LIBER

2 PG 35

FOR CORNERS OF--	LOCATED IN--	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY <u>19</u> T. <u>2</u> N. <u>1</u> E. <u>W.</u>		<u>A-7</u>
2. PROPERTY CONTROLLING IN SECTION _____ T. _____ N. _____ S. _____ R. _____ E. _____ W. _____		
3. MISCELLANEOUS PROPERTY IN SECTION _____ T. _____ N. _____ S. _____ R. _____ E. _____ W. _____		
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

FILED

AUG 11 3 03 PM '72

REGISTER OF DEEDS

Carol M. Lewis
INGHAM COUNTY, MICH.

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, Ron Helsel do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram—over) were, in a field survey on July 27, 1972, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____ 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

Stone 36' south of 36" Oak 7.0' north of E Rd.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

Found rotted remnants of 36" Oak 43.0' north of E M-36 in line with old fence extending north
Set 1/2" iron bar 7.0' north of nail found in E M-36
in line with N-S fence row and south of rotted
Oak stump as best as could be determined.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Witnessed:

<u>South</u>	<u>43.88'</u>	<u>2" angle iron anchor Post</u>
<u>North</u>	<u>42.43'</u>	<u>Cap & nail east side power pole</u>
<u>N 55° W</u>	<u>91.80'</u>	<u>Cap & nail south side power pole</u>

SIGNED BY Ron Helsel DATE August 11, 1972

SURVEYOR'S MICHIGAN REGISTRATION NO. 18994 (SEAL)

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY _____ DATE _____

CHIEF OF SURVEY PARTY

APPROVED AND SIGNED BY _____ DATE _____

MICHIGAN REGISTERED LAND SURVEYOR

(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO. _____

339

Form No. MLM735
DOUGLEDAY BROS. & CO., KALAMAZOO, MICH.

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 28, 1971
DISTRIBUTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS

6 PC 57

FILED

MAY 7 1 21 PM '80

REGISTER OF DEEDS

Paula Johnson
INGHAM COUNTY, MICH.

REGISTER OF DEEDS STAMP AND
FILING NUMBER

FOR CORNERS OF--:	LOCATED IN--:			CORNER CODE NUMBER
1. PUBLIC LAND SURVEY_____	T. <u>2</u>	N. <u>1</u> S. 1	E. <u>1</u> W. 1	<u>A-8</u>
2. PROPERTY CONTROLLING IN SECTION_____, T. _____		N. _____ S. _____	E. _____ W. _____	_____
3. MISCELLANEOUS PROPERTY IN SECTION_____, T. _____		N. _____ S. _____	E. _____ W. _____	_____
4. LOT NO. _____, RECORDED PLAT _____				
5. PRIVATE CLAIMS _____				

I, Ronnie M. Lester, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on April 11, 1980, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____, 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

A-8

No post set in original government survey.
No subsequent record of establishment was discovered.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

A-8

Corner determined to be lost. Set corner midway between A-7 and A-9 on line between M-7 and M-8 or on standard line. Measured north to A-7, 2636.79'; north to M-7, 1465.29'. Measured south to A-9, 2636.79'; south to M-8, 1185.98'. Corner falls 1.0' west of north-south fence. No apparent east or west fence.
Research conducted by Ingham County Survey and Remonumentation Project staff.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

A-8

W $\frac{1}{4}$ Corner, Section 19, T2N-R1E
Set $\frac{1}{2}$ " bar and cap #18998 + 1.0' west of fenceline:
Nail & tag, #18998, east side 10" Sasafrass, South, 5.06'
Nail & tag, #18998, west side 4" Cherry, South, 6.97'
Nail & tag, #18998, west side 5" Oak, NNW, 21.60'
Nail & tag, #18998, east side 4" Sasafrass, North, 3.12'

SIGNED BY Norman M. Lester

SURVEYOR'S MICHIGAN REGISTRATION NO. 18998

FEDERAL BUREAU OF INVESTIGATION

SIGNED BY _____

APPROVED AND SIGNED BY

CHIEF OF SURVEY PARTY

MICHIGAN REGISTERED LAND SURVEYOR
Director, Ingham County Survey
and Remonumentation Project

SURVEYOR'S MICHIGAN REGISTRATION NO. 17624

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 28, 1971
REVISED MAY 14, 1975

MAY PLACE SKETCH ON BACK OR ATTACHED SHEET

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF--:	LOCATED IN--:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY <u>19</u> T. <u>2</u> N. <u>1</u> E.		A-9
2. PROPERTY CONTROLLING IN SECTION _____, T. _____, S. _____, R. _____, E. _____, W. _____		
3. MISCELLANEOUS PROPERTY IN SECTION _____, T. _____, S. _____, R. _____, E. _____, W. _____		
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

LIBER

2 PG 461

FILED

JUN 28 1 26 PM '73

REGISTER OF DEEDS

Ronnie M. Lester
INGHAM COUNTY, MICH.REGISTER OF DEEDS STAMP AND
FILING NUMBER

I, Ronnie M. Lester do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram—over) were, in a field survey on April 9, 19 73, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on 19, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

Original monument and accessories obliterated.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

Fd. fence post with remains of fence, running North, South, and East.
Corner fit with all adjacent occupation. Set 1/2" bar.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

SW Corner Section 19, T2N, R1E

Set Nail & Tag SW side 16" cherry, NW, 36.54'
Set Nail & Tag North side 6" cherry, East, 18.75'
Set Nail & Tag North side fence post, West, 3.34'

SIGNED BY

Ronnie M. Lester

DATE

April 10, 1973SURVEYOR'S MICHIGAN REGISTRATION NO. 18998

(SEAL)

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY

CHIEF OF SURVEY PARTY

DATE

APPROVED AND SIGNED BY

MICHIGAN REGISTERED LAND SURVEYOR

DATE

(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO. 18998Form No. MCM730
DOUGLASS BROS. & CO., KALAMAZOO, MICH.FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN., 28, 1971
DISTRIBUTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970

FOR CORNERS OF--	LOCATED IN--	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY _____	Sec. <u>20</u> T. <u>2</u> N. <u>1</u> R. <u>1</u> E. <u>1</u>	C-7
2. PROPERTY CONTROLLING IN SECTION _____	T. _____ N. _____ S. _____ R. _____ E. _____ W. _____	
3. MISCELLANEOUS PROPERTY IN SECTION _____	T. _____ N. _____ S. _____ R. _____ E. _____ W. _____	
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

LABER 1 PG 173

FILED

SEP 21 1 49 PM '71

REGISTER OF DEEDS

Michael J. Lester
KALAMAZOO COUNTY, MICH.

REGISTER OF DEEDS STAMP AND
FILING NUMBER

I, Gary D. Lester do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram - over) were, in a field survey on September 1 1971, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on September 1 1971, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

Original monument and accessories obliterated.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

Found boatspike at intersection of M-36 and Meridian Road. Distances South and East in close accord with original government measure.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Nail & Tag in SW side of power pole NW, 60.32'
Nail & Tag in NW side of power pole NE, 63.23'
Nail & Tag in North side of 48" maple, WSW, 113.57'

SIGNED BY

Gary D. Lester

DATE

9/21/71

SURVEYOR'S MICHIGAN REGISTRATION NO. 17624

(SEAL)

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY

CHIEF OF SURVEY PARTY

DATE

APPROVED AND SIGNED BY

MICHIGAN REGISTERED LAND SURVEYOR

DATE

(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO. _____

Form No. MLM735
DOUGLEDAY BROS. & CO., KALAMAZOO, MICH.

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 28, 1971
DISTRIBUTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS

CORNER NUMBERING CODE DIAGRAMS FOR IDENTIFYING LAND CORNER RECORDATIONS AND INDEXING

FOR PUBLIC LAND SURVEY CORNERS IN THE
T. 2N, R. 1E (MENTIONED OVER)

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

Apply letter prefix for corner points encircled above for identifying corner recordation numbers over.

FOR PROPERTY CONTROLLING AND MISC.
PROPERTY CORNERS WITHIN THE SECTION
(MENTIONED OVER AND EXCLUDE LOT CORNER)

	1	2	3	4	5	6	7
3							
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							

1. Above coded numbers are positioned on 1/16 fractional lines of the section.
2. Township corner code numbers shall be applied to corners of above typical section not numbered.
3. Miscellaneous property corners within a section, located at points other than numbered above, shall be referenced to at least two of above corner code numbers.
4. Private claim corners to be tied to rectangular land corners if possible - sketch required below.

EXPLANATORY SKETCH IF NECESSARY -- BELOW

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970

LIBER 1 PC 71

FOR CORNERS OF--	Sec.	LOCATED IN--	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY	19	T. 2 N. R. 1 E.	C-8
2. PROPERTY CONTROLLING IN SECTION		T. N. S. R. E. W.	
3. MISCELLANEOUS PROPERTY IN SECTION		T. N. S. R. E. W.	
4. LOT NO.		RECORDED PLAT	
5. PRIVATE CLAIMS			

FILED

AUG 3 1 58 PM '71

REGISTER OF DEEDS
Mia Bell Humphrey
INGHAM COUNTY, MICH.

REGISTER OF DEEDS STAMP AND
FILING NUMBER

I, Gary D. Lester do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram—over) were, in a field survey on June 16 1971, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on June 16 1971, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

Original government corner and accessories obliterated.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

Set on line between SE corner and NE corner of section at intersection of fence line to East with proportional measurement North and South as supporting evidence.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner

Set T-bar and cap in Meridian Road.

E 1/4 Corner Section 19, T2N, R1E
Nail & Tag in 24" Cherry tree NW, 175.14'
Nail & Tag in 18" stump NE, 121.13'
Nail & Tag in fence corner post East, 29.83'

SIGNED BY Gary D. Lester
SURVEYOR'S MICHIGAN REGISTRATION NO. 17624
FOR STATE AND UNITED STATES AGENCIES:

DATE June 24, 1971

(SEAL)

SIGNED BY _____
CHIEF OF SURVEY PARTY
APPROVED AND SIGNED BY _____
MICHIGAN REGISTERED LAND SURVEYOR

DATE

DATE

(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO.

Form No. MLM735
DOUBLEDAY BROS. & CO., KALAMAZOO, MICH.

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 28, 1971
DISTRIBUTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS

CORNER NUMBERING CODE DIAGRAMS FOR IDENTIFYING LAND CORNER RECORDATIONS AND INDEXING

FOR PUBLIC LAND SURVEY CORNERS IN THE
T. 2N, R. 1E (MENTIONED OVER)

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

Apply letter prefix for corner points encircled above
for identifying corner recordation numbers over.

FOR PROPERTY CONTROLLING AND MISC.
PROPERTY CORNERS WITHIN THE SECTION
(MENTIONED OVER AND EXCLUDE LOT CORNER)

	1	2	3	4	5	6	7
3							
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							

1. Above coded numbers are positioned on 1/16 fractional lines of the section.
2. Township corner code numbers shall be applied to corners of above typical section not numbered.
3. Miscellaneous property corners within a section, located at points other than numbered above, shall be referenced to at least two of above corner code numbers.
4. Private claim corners to be tied to rectangular land corners if possible - sketch required below.

EXPLANATORY SKETCH IF NECESSARY -- BELOW

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

LIBER 7 PAGE 304

For corners in

FILED

<u>INGHAM</u> (County)	Located In:	Corner Code <u>##</u>
1. Public Land Survey	T <u>2N</u> R <u>1E</u>	<u>C-8</u>
	T <u> </u> R <u> </u>	<u> </u>
	T <u> </u> R <u> </u>	<u> </u>
	T <u> </u> R <u> </u>	<u> </u>
2. Property Controlling in Section	S <u> </u> T <u> </u> R <u> </u>	<u> </u>
	S <u> </u> T <u> </u> R <u> </u>	<u> </u>
3. Miscellaneous	S <u> </u> T <u> </u> R <u> </u>	<u> </u>
Property in Sec.	S <u> </u> T <u> </u> R <u> </u>	<u> </u>

OCT 29 11 25 AM '92

REGISTER OF DEEDS

Paul J. Johnson
INGHAM COUNTY, MICH.

Register of Deeds Stamp & File Number

4. Lot No. , Recorded Plat
 5. Private Claims

I, Maurice H. Mahieu, in a field survey on September 23, 19 92, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

C-8 Original Government Corner and Accessories were not found.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

C-8 Found "T" Bar in Monument Box in Meridian Road, as recorded by Gary D. Lester on June 24, 1971 in Liber 1, Page 71


This Corner is being re-recorded to update the witnesses.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-8 East 1/4 Corner, Section 19, T2N, R1E, Ingham Township, Ingham County
"T" Bar in Monument Box

Witnessed By:

- Nail & Tag #28414, North Side Wood Post, East 28.25'
- Nail & Tag #28414, North Side 15" Oak, S 70° E 31.10'
- Nail & Tag #28414, North Side 15" Box Elder, S 50° E 34.40'
- Nail & Tag #28414, South Side 28" Box Elder, N 75° E 31.85'

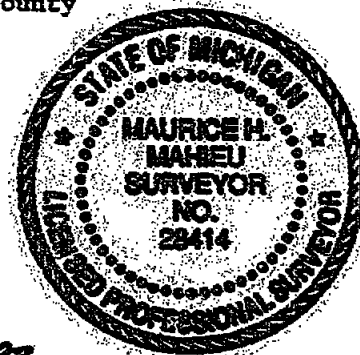

Signed by Maurice H Mahieu

Date 10-7-92

Surveyor's Michigan License No. 28414

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 26, 1971
 REVISED MAY 14, 1975
 REVISED JAN., 1983

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970

FOR CORNERS OF--	Sec.	LOCATED IN--	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY	19	T. 2 N. R. 1 E.	C-9
2. PROPERTY CONTROLLING IN SECTION		T. N. R. E.	
3. MISCELLANEOUS PROPERTY IN SECTION		T. N. R. E.	
4. LOT NO. _____		RECORDED PLAT _____	
5. PRIVATE CLAIMS _____			

LIBER 1 PG 73
FILED

AUG 3 1 58 PM '71
REGISTER OF DEEDS
Mia Bill Humphrey
INGHAM COUNTY, MICH.

REGISTER OF DEEDS STAMP AND
FILING NUMBER

I, Gary D. Lester do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram--over) were, in a field survey on June 16 1971, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on June 16 1971, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and or subsequent restoration:

Original government corner and accessories obliterated.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

Old fence line to East supported by measurements North and South to ~~the~~ evidence of other obliterated government corners and deeded dimensions to occupation lines Westerly of corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Set T-bar and cap in Meridian Road.

SE Corner Section 19, T2N, R1E
Nail & Tag in fence corner post ENE, 30.70'
Nail & Tag in power pole NW, 54.61'
Nail & Tag in 24" Maple tree SW, 63.97'

SIGNED BY

Gary D. Lester

DATE June 24, 1971

SURVEYOR'S MICHIGAN REGISTRATION NO. 17624

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY

CHIEF OF SURVEY PARTY

DATE

APPROVED AND SIGNED BY

MICHIGAN REGISTERED LAND SURVEYOR

DATE

(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO.

Form No. MLM735
PUBLISHED BY BROS. & CO., KALAMAZOO, MICH.

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 28, 1971
DISTRIBUTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS

CORNER NUMBERING CODE DIAGRAMS FOR IDENTIFYING LAND CORNER RECORDATIONS AND INDEXING

FOR PUBLIC LAND SURVEY CORNERS IN THE
T. 2N, R. 1E (MENTIONED OVER)

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9		⊕											
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

Apply letter prefix for corner points encircled above for identifying corner recordation numbers over.

FOR PROPERTY CONTROLLING AND MISC.
PROPERTY CORNERS WITHIN THE SECTION
(MENTIONED OVER AND EXCLUDE LOT CORNER)

	1	2	3	4	5	6	7
3							
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							

1. Above coded numbers are positioned on 1/16 fractional lines of the section.
2. Township corner code numbers shall be applied to corners of above typical section not numbered.
3. Miscellaneous property corners within a section, located at points other than numbered above, shall be referenced to at least two of above corner code numbers.
4. Private claim corners to be tied to rectangular land corners if possible - sketch required below.

EXPLANATORY SKETCH IF NECESSARY -- BELOW

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

LIBER 7 PAGE 303

For corners in

INGHAM

(County)

Located in:

Corner Code #

FILED

- | | | | | | |
|------------------------------------|---|-----------|---|-----------|------------|
| 1. Public Land Survey | T | <u>2N</u> | R | <u>1E</u> | <u>C-9</u> |
| | T | | R | | |
| | T | | R | | |
| | T | | R | | |
| 2. Property Controlling in Section | S | | T | R | |
| | S | | T | R | |
| 3. Miscellaneous Property in Sec. | S | | T | R | |
| | S | | T | R | |

OCT 29 11 25 AM '92

REGISTER OF DEEDS

Paul J. Johnson

INGHAM COUNTY, MICH.

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Maurice H. Mahieu, in a field survey on September 23, 19 92, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

C-9 Original Government Corner and Accessories were not found.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

C-9 Found "T" Bar in Monument Box in Centerline of Meridian Road, as recorded by Gary Lester on June 24, 1971, in Liber 1, Page 73.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-9 SE Corner, Section 19, T2N, R1E, Ingham Township, Ingham County
 "T" Bar in Monument Box

Witnessed By:

- Nail & Tag #28414, West side Utility Pole, N 10° E 104.32'
- Nail & Tag #28414, NE side Utility Pole, N 34° W 66.76'
- SW Corner Garage Foundation Wall, S 80° E 75.23'
- Nail & Tag #28414, East side 32" Maple, S 30° W 110.77'



Signed by

Maurice H. Mahieu

Date

10-7-92

Surveyor's Michigan License No.

28414