

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at RECORDS OFFICE



E-8
corner code attachment no. 1

p. 1 of 2

SOURCE: RECORD CO. SURVEYOR Vol. 2 PAGE 165 Ye. 185

TRANSCRIBED from ~~ORIGINAL~~ on file at RECORD OFFICE
DUPLICATE

E-8
10
15
9
17
21
27

1	Beck 8 in S 47 1/2 N 18 1/2 E	12	S 10 1/2 E	24
2	do 6 A 10 E	13	O. Dunn 5 A 17 1/2	25 1/2
3	do 5 S 77 E	49	J. B. Oak 10 S 86 E	66
4	do 11 A 23 1/2 E	36	do 13 A 28 E	64
5	do 10 A 54 E	72	G. B. Oak 12 S 20 E	5 1/2
6	do 5 S 24 1/2 E	22	do 5 A 31 1/2 E	11 1/2
7	do 15 A 26 E	45		
8	do 20 A 67 1/2 E	67		

Run by the line musician Van 20 3/4 E

Surveyed by Daniel Holmes C. P. Co. Surveyor

August 23rd 1853


Recorded by A. Jackson Co. Surveyor

Surveyor

165

SOURCE: G. L. O. MAP #5
TRANSCRIBED from ~~ORIGINAL~~ on file at REMON. OFFICE
DUPLICATE
SURVEYOR'S NAME _____ SURVEYOR NO. _____
DATE OF SURVEY _____ SECTION NO. 20-21
MAGNETIC VARIATION 4° 45' E

ASSUMED DISTANCE BETWEEN E-8 AND E-7 = 40.00 CHAINS
" " " E-9 AND E-8 = 40.00 CHAINS
/
NO WRITTEN DISTANCE GIVEN

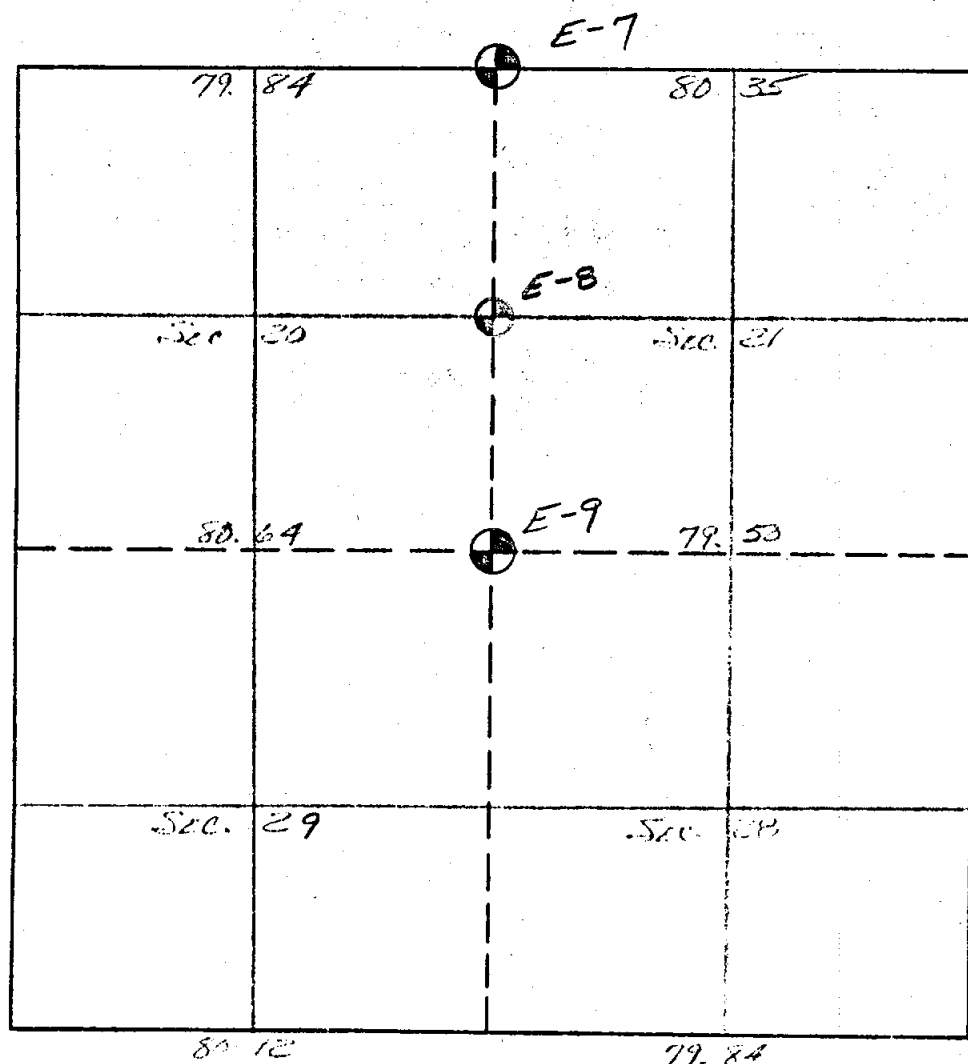

INGHAM
TOWNSHIP

T 2 N, R 1 E

E-8
CORNER CODE

2
ATTACHMENT NO.

P. 1 of 1

SOURCE: G. L. O. FIELD NOTES P. 41

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON OFFICE

40

E on R^g Elm 21 + 28
10000 cu dm
15000 cu dm
4000 per tin pop
7075 dm fies Co A
7750 Int at S line 10 hrs Syp

A Co Elm 21 + 28
3475 per q per not pu
Be 5 A 44 W 7 1/2
Elm 11 S 7 E 23
7750 to dec 1000

1 Elm 20 + 21
3.68 NO 21
14.58 Elm 18
4000 per q per pu

41

Be 5 S 47 W 13 } E-8
" 6 A 10 E 13 }

4385 Be 5
6286 BD 7
6300 cu dm fm
8000 per p. Cor 16. 17. 20 + 21, 10000 per
Jan 16 - A 15 E 18
" 6 S 36 E 8

E on R^g Elm 16 + 21
8000 cu dm
4000 per tin pop
4000 cu dm fm
5300 de " "
8035 Int at S line 8 hrs Syp


A Co Elm 16 + 21

SOURCE: Index #1 P. 45

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at RECORD OFFICE

Town 2 N., Range 18 W.

Section No. 21

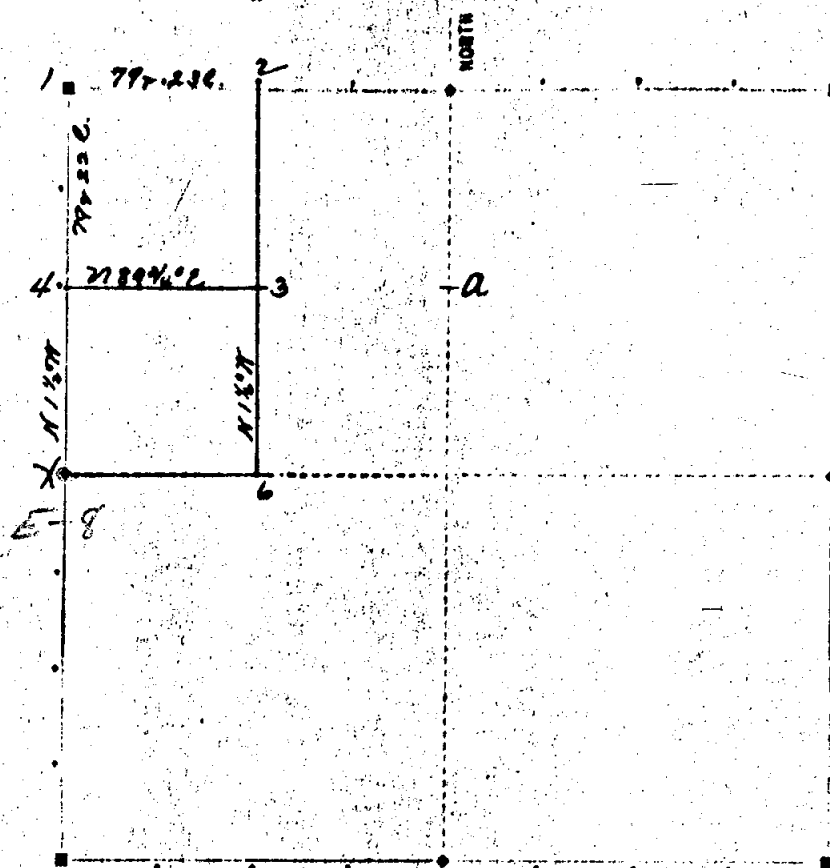

Sec.	Timber.	Diam.	Bearing.	Links.	Sec.	Timber.	Diam.	Bearing.	Links.
2	H. Oak	10	S 13° 45' E	15 1/2					
1	elm	5	S 77° 35' E	25					
	elm	1	S 12° 2' E	19 1/2					
2	elm	5	S 36° 2' E	50					
3	B. cherry	8	S 32° 45' E	41					
	"	5	S 4° 2' E	24					
4	B. h.	4	S 21° 3' E	40					
	"	14	S 21° 3' E	51 1/4					
6	elm	7	S 23° 34' E	19					
	H. O.	40	N 22° 45' E	128					
E-8	elm	2	N 36° 4' E	31					
X	elm	3	N 61° 14' E	17					

Run by the true meridian. Magnetic variation ... degrees ... minutes

Surveyed the 23 day of January 1866 by

M. H. R.

County Surveyor of Ingham County, Mich.

Sec. 21


INGHAM
township

T 2 N., R 1 EW

E-8
corner code attachment no.

p. 1 of 1

SOURCE: RECORD CO. SURVEYOR Vol. 2 PAGE. 98
TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

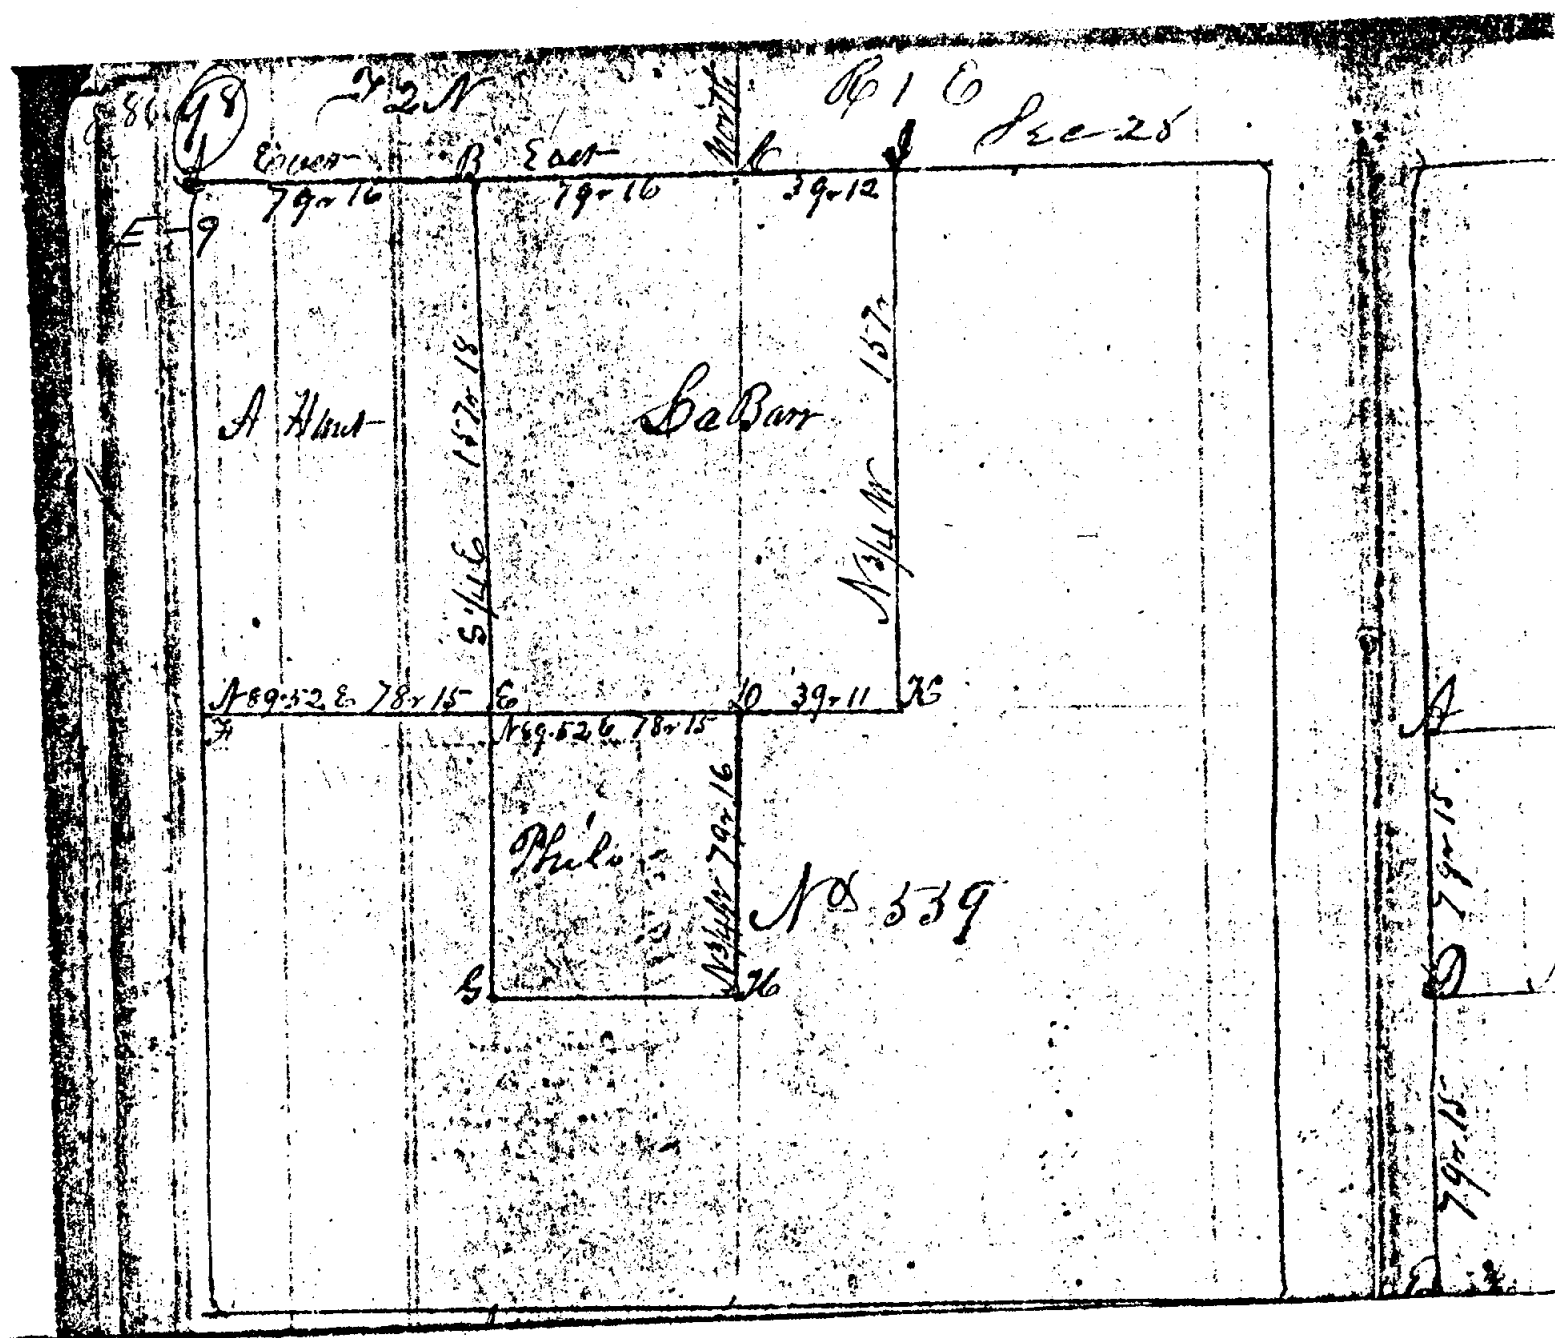

SOURCE: RECORD CO. SURVEYOR Vol. 2 PAGE. 98
 TRANSCRIBED from ~~ORIGINAL~~ on file at RECORD OFFICE
 DUPLICATE


E-9

J. W. Oak	16 in	S 33 1/2 W	29 1/2
J. B. Oak	18	S 69 E	30
J. Oak	8	S 34 1/2 W	10
J. Oak	11	N 71 1/2 W	10
J. Oak	5	N 49 W	7 1/2
J. Oak	11	S 7 E	23
J. W. Oak	10	S 29 1/2 E	7 1/2
no other tree			
J. B. Oak	9	S 19 E	15
J. Oak	4	N 57 1/2 E	9
J. B. Oak	8	S 39 1/2 W	57
J. Oak	9	N 40 1/2 E	41
J. Oak	12	N 58 W	12
J. Oak	8	N 73 E	32
J. W. Oak	10	N 76 E	4 1/2
J. Oak	14	N 88 1/2 W	19
J. W. Oak	24	N 68 W	66
J. Oak	18	N 26 1/2 E	44
J. Oak	6	S 22 E	28
J. Oak	10	S 78 E	33

Run by the town of Mendon
 Van E

98

TRANSCRIBED from ~~ORIGINAL~~ on file at REMON. OFFICE

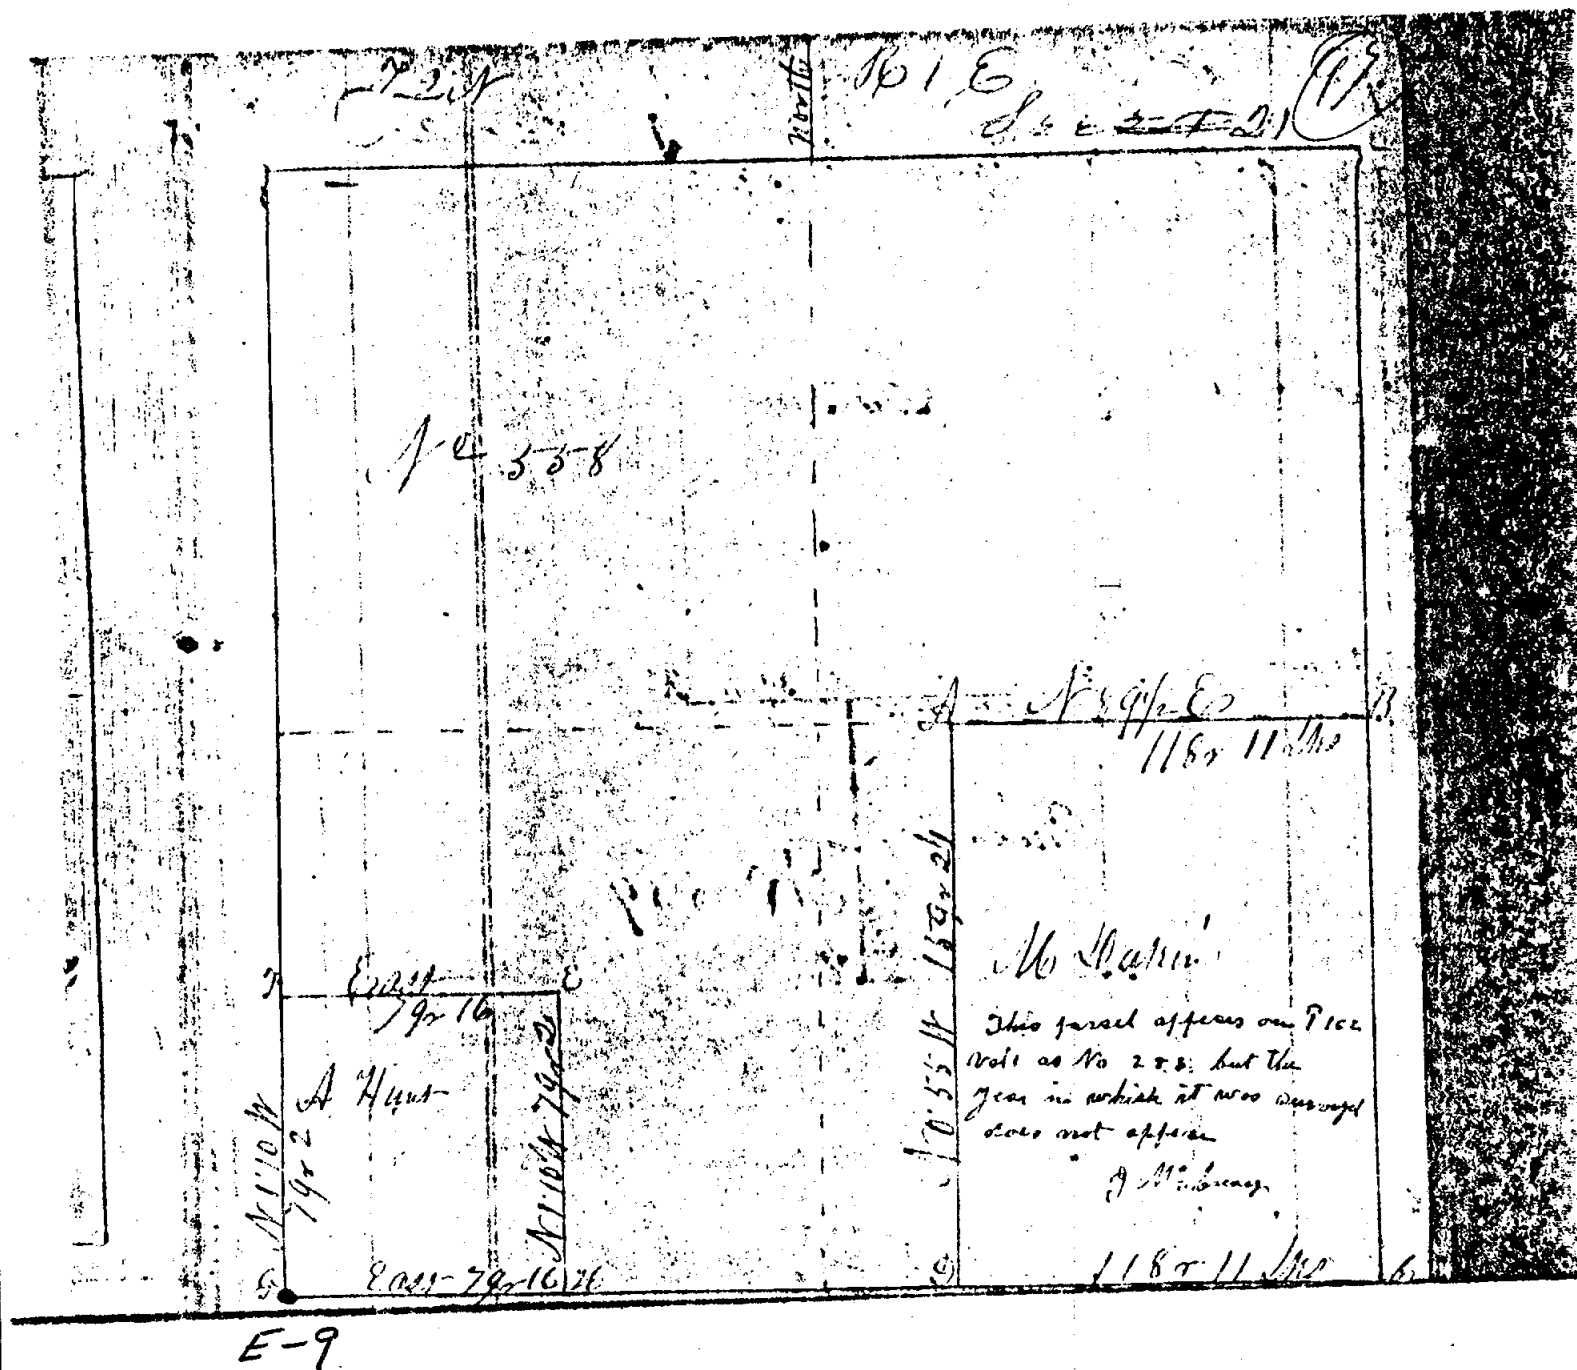

SOURCE: RECORD CO. SURVEYOR Vol. 2 PAGE 98
 TRANSCRIBED from ORIGINAL on file at RECORD OFFICE
 DUPLICATE

E-9

Pack	7 in	S 82 W	10	Sec
Elm	9	N 24 W	18	
Tan	9	N 16 E	82 1/2	
Elm	8	S 89 1/2 W	51 1/2	
W Oak	15	N 26 1/2 E	44 1/2	
do	24	N 68 W	66	
E Oak	6	S 41 E	17	
E Oak	7	S 19 1/2 W	88	
E Oak	11	S 23 1/2 E	5 1/2	
do	9	N 82 1/2 E	12	
E Oak	10	S 23 1/2 W	29	
E Oak	18	S 69 E	30	
Tan	8	S 34 1/2 W	10	
do	11	N 71 1/2 W	10	

Run by the late Mr. J. H. Jackson
 Surveyed by J. H. Jackson Dec 16/188

97

SOURCE: G.L.O. MAP #5

TRANSCRIBED from ~~ORIGINAL~~ on file at REMON. OFFICE
DUPLICATE

SURVEYOR'S NAME

SURVEYOR NO.


DATE OF SURVEY

SECTION NO. 24, 21, 28, 29

MAGNETIC VARIATION *4° 45' E*

ASSUMED DISTANCE BETWEEN E-8 AND E-9 = 40.00 CHAIN
 " " " E-10 AND E-9 = 40.00 CHAIN
 " " " D-9 AND E-9 = 40.32 CHAIN
 " " " E-9 AND E-9 = 39.75 CHAIN

WRITTEN DISTANCE GIVEN BETWEEN C-9 AND E-9 = 80.640.
 " " " " E-9 AND G-9 = 77.500.

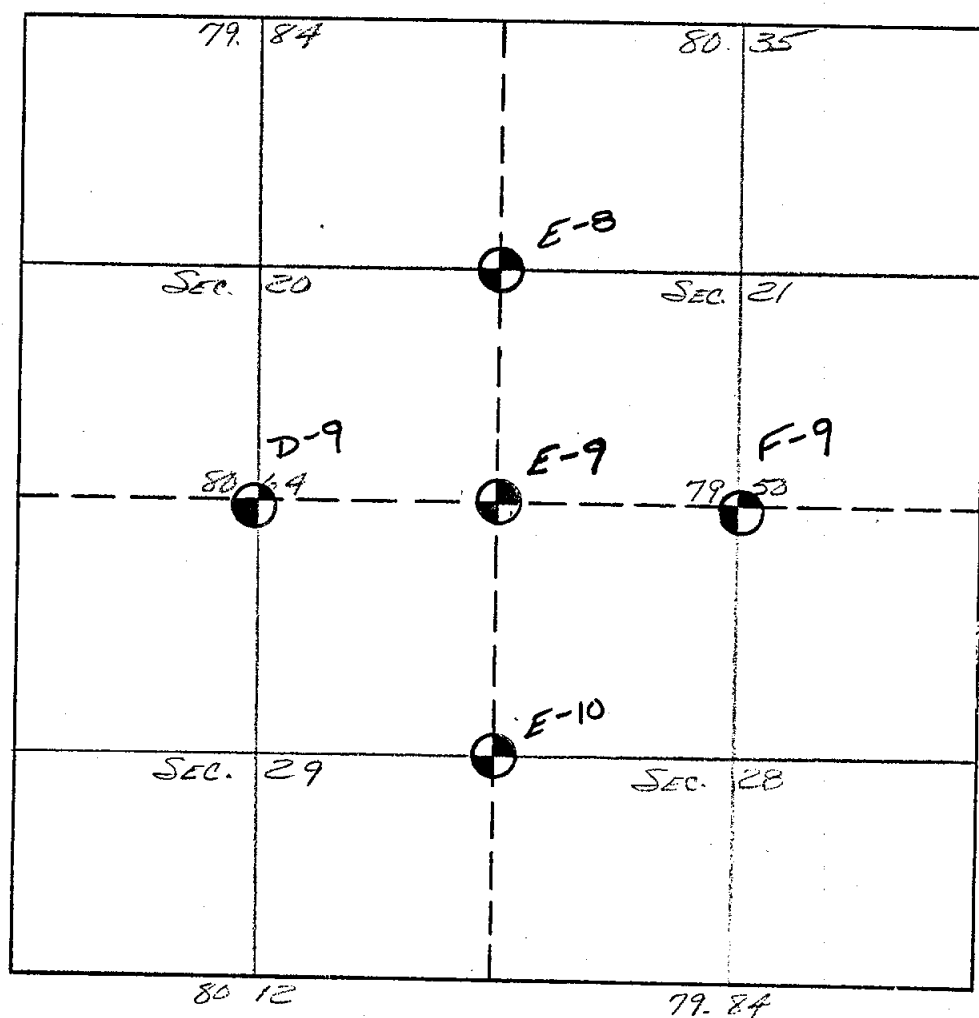

NOT TO
SCALE

INGHAM
TOWNSHIP

T 2 N, R / E

E-9
CORNER CODE

3
ATTACHMENT NO.

P. / of /

SOURCE: G. L. O. Field Notes P. 39

TRANSCRIBED from ~~original~~ DUPLICATE on file at REMON. Office

38

At Sta 32 & 33 1

8.43 Lam 16

12.40 Run 15.60 Co SW

21.16 " 15" 'SE

40.00 set gr p f w

Lam 10 A 38 E 9

" 8 S 44 W 11

51.50 en impasse NW

60.00 le "

64.00 le Lam Sm

80.00 set p Cor 28, 29 32 & 33 f w

NO 14 A 36 E 58

BO 9 S 15 W 21

E on rd Sta 28 & 33

28.00 en Lam Sm

38.00 le "

40.00 set twin gr p

39

60.00 en Lam Sm

79.84 Int N & S line 20 lines g/

At Sta 28 & 33

39.92 set gr p at f w

NO 8 S 13 E 25

BO 9 A 29 W 11

79.84 to 2nd Cor

At Sta 28 & 29

40.00 set gr p f w

NO 8 S 59 W 37

" 9 N 40 E 41

73.35 NO 14

80.00 set p Cor 20, 21, 28 & 29 f w

NO 16 S 23 W 29

NO 18 S 67 E 30

E-9

SOURCE:

Index # 1 P. 46

TRANSCRIBED from


ORIGINAL
DUPLICATE

on file at

RECORD OFFICE

Town 2 N. Range 1 E.

Section No. 21

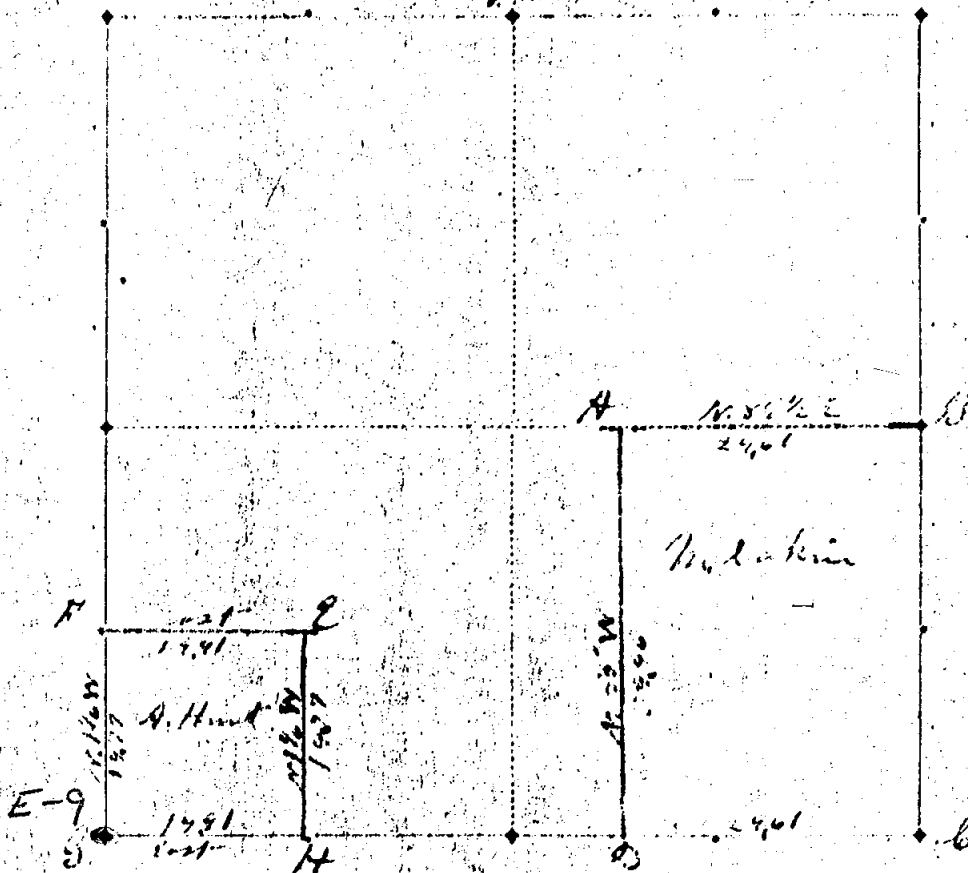

North'n	Timber	Diam	Bearing	Links	North'n	Timber	Diam	Bearing	Links
A	ash	17	S. 82° W	10					
B	ash	9	N. 24° W	18					
C	ash	9	N. 16° S	22					
D	ash	2	S. 58° W	51					
E	W. Oak	18	N. 26° E	44					
F	"	24	N. 63° W	66					
G	ash	6	S. 48° E	17					
H	ash	7	S. 18° W	6					
I	O. Oak	11	S. 28° E	5					
J	"	9	N. 88° E	12					
K	W. Oak	16	S. 28° W	24					
L	B. Oak	18	S. 63° E	30					
M	ash	8	S. 54° W	10					
N	"	11	N. 71° W	10					

Run by the true meridian. Magnetic variation 5 degrees 3 minutes W.

Surveyed the 16 day of Dec 1881 by

A. J. P.
County Surveyor of Ingham County, Michigan.

Sec. 21

INGHAM
township

T 2 N. R 1 EW

E-9

corner code


attachment no.

p. 1 of 1

TRANSCRIBED from ~~ORIGINAL~~ on file at Person. Office
DUPLICATE

Town 2 N, Range 1 E

Section No.

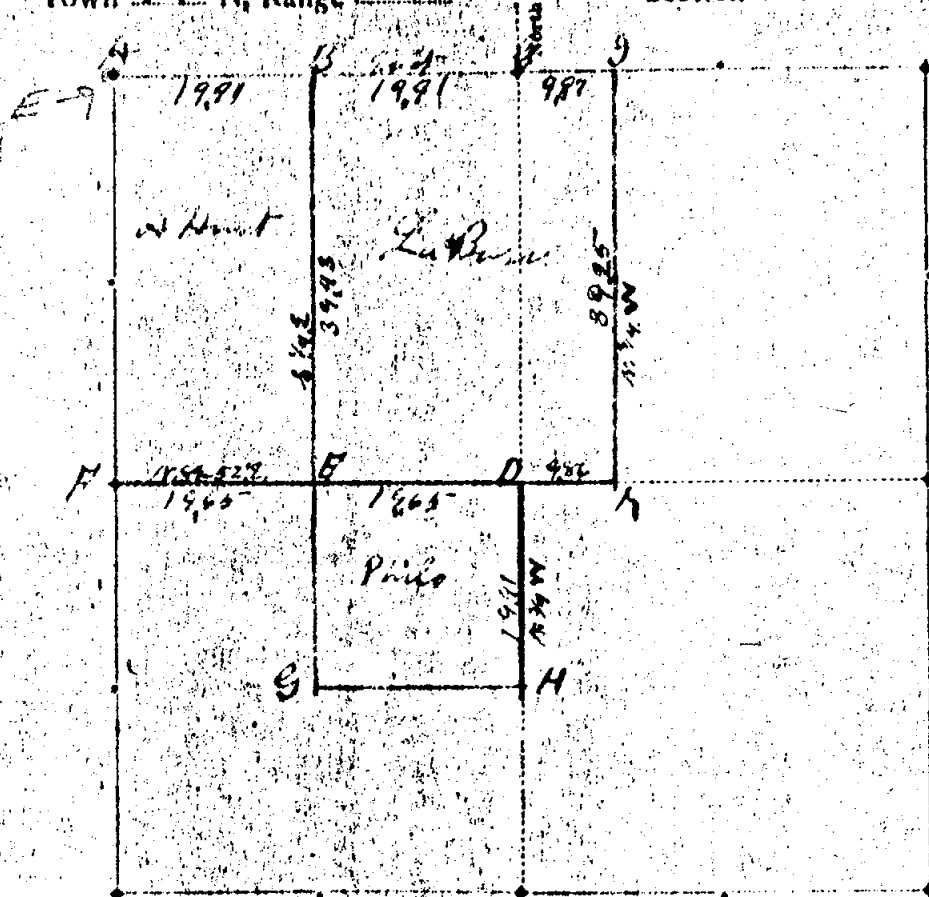

Host'n	Timber	Diam	Bearing	Links	Host'n	Timber	Diam	Bearing	Links
E-9	A	W. Oak	16	S. 23 1/2 W. 29	J	W. Oak	24	N. 16 1/2 W. 66	
	B	"	18	S. 6 1/2 E. 39		"	18	N. 26 1/2 E. 44	
	C	"	9	S. 34 1/2 W. 10		"	6	S. 1 1/2 E. 28	
	D	"	11	N. 11 1/2 W. 40		"	10	S. 8 1/2 E. 33	
	E	"	5	N. 49 1/2 W. 9 1/2					
	B	"	11	S. 4 1/2 E. 23					
	C	W. Oak	20	S. 49 1/2 E. 7 1/2					
	D	B. Oak	4	S. 14 1/2 E. 15					
	E	2 1/2 Oak	4	N. 27 1/2 E. 8					
	F	"	4	S. 59 1/2 W. 57					
	G	"	4	N. 40 1/2 E. 41					
	H	"	12	N. 58 1/2 W. 12					
	I	"	8	N. 8 1/2 E. 32					
	J	W. Oak	10	N. 76 1/2 E. 47					
	K	"	14	N. 10 1/2 W. 19					

Run by the true meridian. Magnetic variation 3 degrees 0 minutes 2

Surveyed the Arroyo day of 1878 by

A. Jackson
County Surveyor of Ingham County, Michigan.


Sec. 28

Sketch, witness, and describe monuments found, and location relative to traverse point and centerline of road.

NOTE:
NEW WITNESS

FD. T. P. 11,043 BY WITNESSES ON TRAVERSE
POINT WITNESS REPORT.

CHECKED & USED BOTH ^{SETS OF} RECORDED WITNESSES.
COULDN'T FIND 1 WITNESS FROM LIBER #1 Pg. #161
N.W. 41.00 N/T SW/SIDE 10" BOXED.
THEN TIED F-7 INTO TRAVERSE

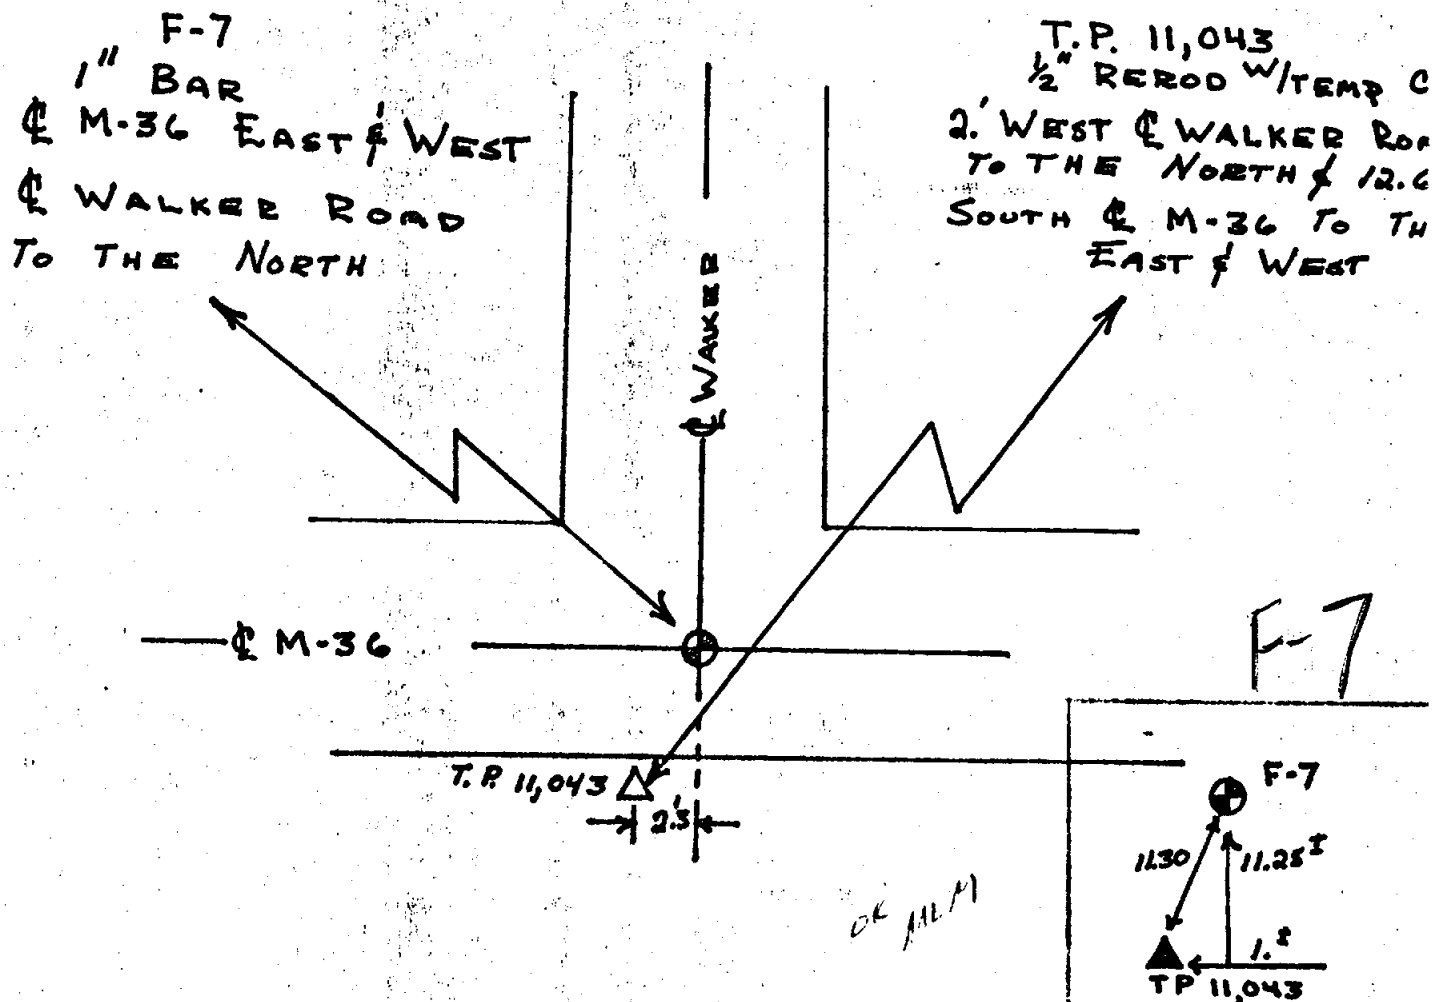

3-20-78; Fld. Form No.

APPROVED AND FORWARDED BY

DATE _____

THE UNIVERSITY OF MICHIGAN LIBRARY

FORM APPROVED BY MILWAUKEE STATE BOARD OF REGISTRATION, JAN. 22, 1970.
 REVISIONS BY MILWAUKEE SOCIETY OF REGISTERED LAND SURVEYORS

SOURCE: RECORD CO. SURVEYOR Vol. 1 PAGE 146 Yr. 1841
TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

146

E. D. A.

R. E. 1 E

21

August 79 x 11 1/2 ft. 1/4 in. 11 1/2 ft. 1/4 in. 11 1/2 ft. 1/4 in.
66 W. 1/2 sec. 13T
N. 1/2 sec. 13T
N. 1/2 sec. 13T
F-8

SOURCE: RECORD Co. SURVEYOR Vol. 1 PAGE 146 Yr. 1841

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at RECORD OFFICE


Y. Oak 14 in S 61 W 33 No
Y. Oak 11 in N 82 1/2 E 39 No
B. Spruce 17 in S 40 W 21 No
B. Spruce 13 in S 40 E 23 1/2 No
R. Oak 34 in N 11 W 22 No
C. Oak 24 in N 31 E 35 No
Ash 7 in S 82 W 10 No
Elm 9 in N 24 W 18 No
Maple 17 in S 62 1/2 E 21 No
R. Oak 18 in S 16 1/2 W 9 No
Y. Spruce 9 in S 77 1/2 E 49 No
Y. Spruce 12 in N 23 1/2 E 56 No
Run by the line from the corner of the
Survey and Recorded April 21 1841
by A. Jackson - Surveyor

F-8

146

SOURCE: RECORD CO. SURVEYOR Vol. 2 PAGE 165 Yr. 1853

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at RECORD OFFICE

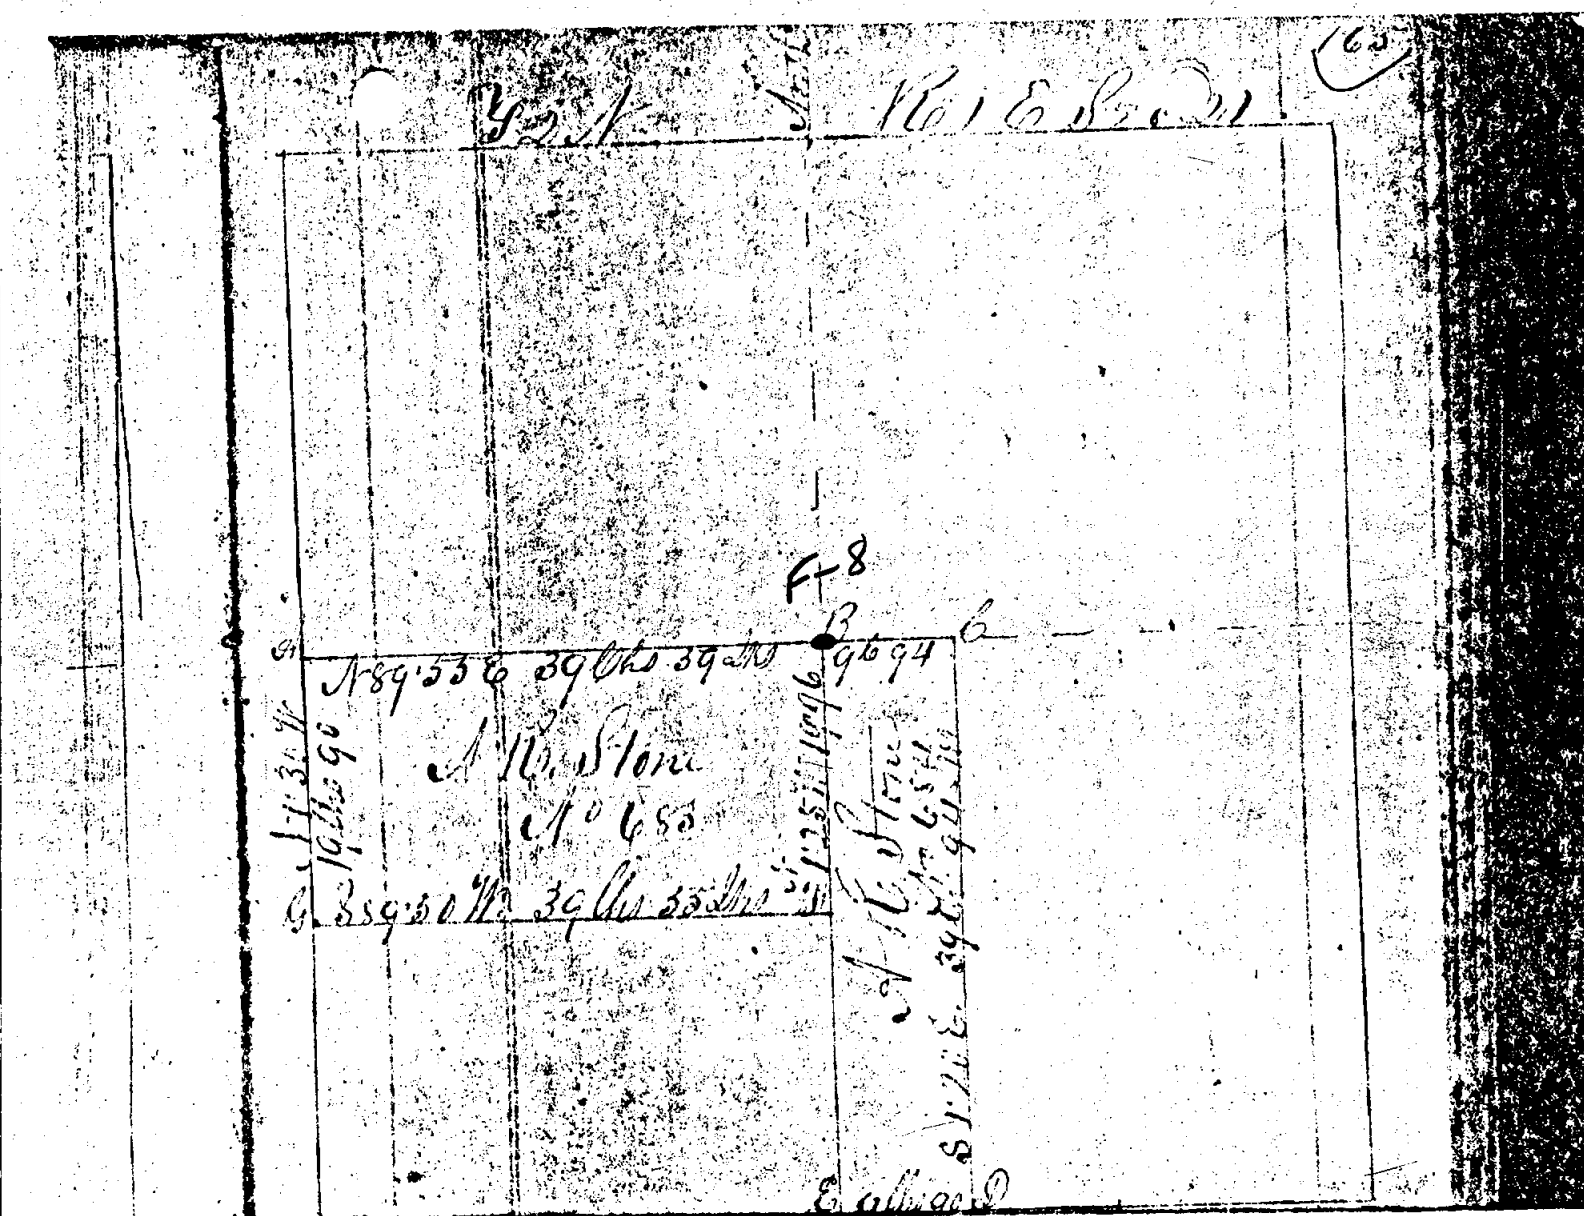

SOURCE: RECORD CO. SURVEYOR Vol. 2 PAGE 165 Yr. 1853
 TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at RECORD OFFICE

24
 66
 19
 9
 27
 27
 27

F-8


Beck 8 in S 47 1/2 E 18 1/2 S 10 1/4 E 24
 do 6 A 11 E 13 Olyn 5 A 17 1/2 E 25 1/2
 do 5 S 77 E 49 1/2 do 10 S 86 E 66
 do 11 A 23 1/2 E 36 do 13 A 28 E 61
 do 10 A 54 E 7 1/2 do 12 S 26 E 5 1/2
 do 8 S 24 1/2 E 22 do 8 A 8 1/2 E 11 1/2
 do 15 A 26 E 13
 do 20 A 67 1/2 E 67
 Run by the line Indian Var 23 1/2 E
 Surveyed by Daniel Holmes Dpty Co Surveyor
August 23rd 1853
 Recorded by A. Jackson Co Surveyor

SOURCE: Index #1 P. 48

TRANSCRIBED from ORIGINAL on file at RECORD OFFICE

Town 2 N. Range 18

Section No. 21

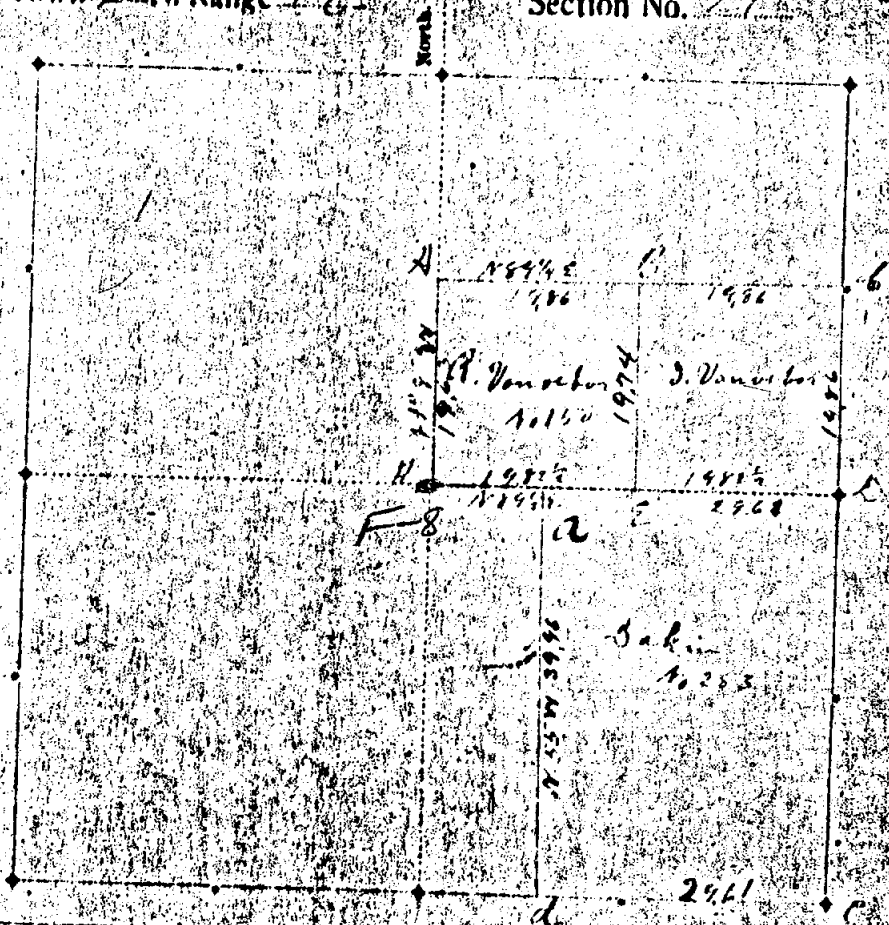

Section	Timber	Dist	Bearing	Links	Section	Timber	Dist	Bearing	Links
A	Dark	77	S 61° W	35	U	Dark	10	N 38° E	6
B	Dark	11	S 42° W	21	V	Dark	8	S 22° W	2.8
C	Dark	13	S 40° W	21.5	D	Dark	11	N 16° E	4.1
E	Dark	34	N 11° W	22	F	Dark	10	S 59° W	5.1
G	Dark	34	S 36° E	33	H	Dark	18	N 26° E	4.4
I	Dark	7	S 22° W	10	J	Dark	24	N 68° W	6.6
K	Dark	9	S 14° W	18					
L	Dark	17	S 61° E	21					
M	Dark	19	S 16° W	9					
N	Dark	9	S 77° E	19					
O	Dark	12	S 13° W	22					

Run by the true meridian. Magnetic variation 3 degrees 15 minutes E


Surveyed the 21 day of Apr 1891 by

1892
1891
1890

A. Jackson
County Surveyor of Ingham County, Michigan.

Sec. 21

SOURCE: RECORDED LAND SURVEY LIB. 2 PAGE 1062-63
TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

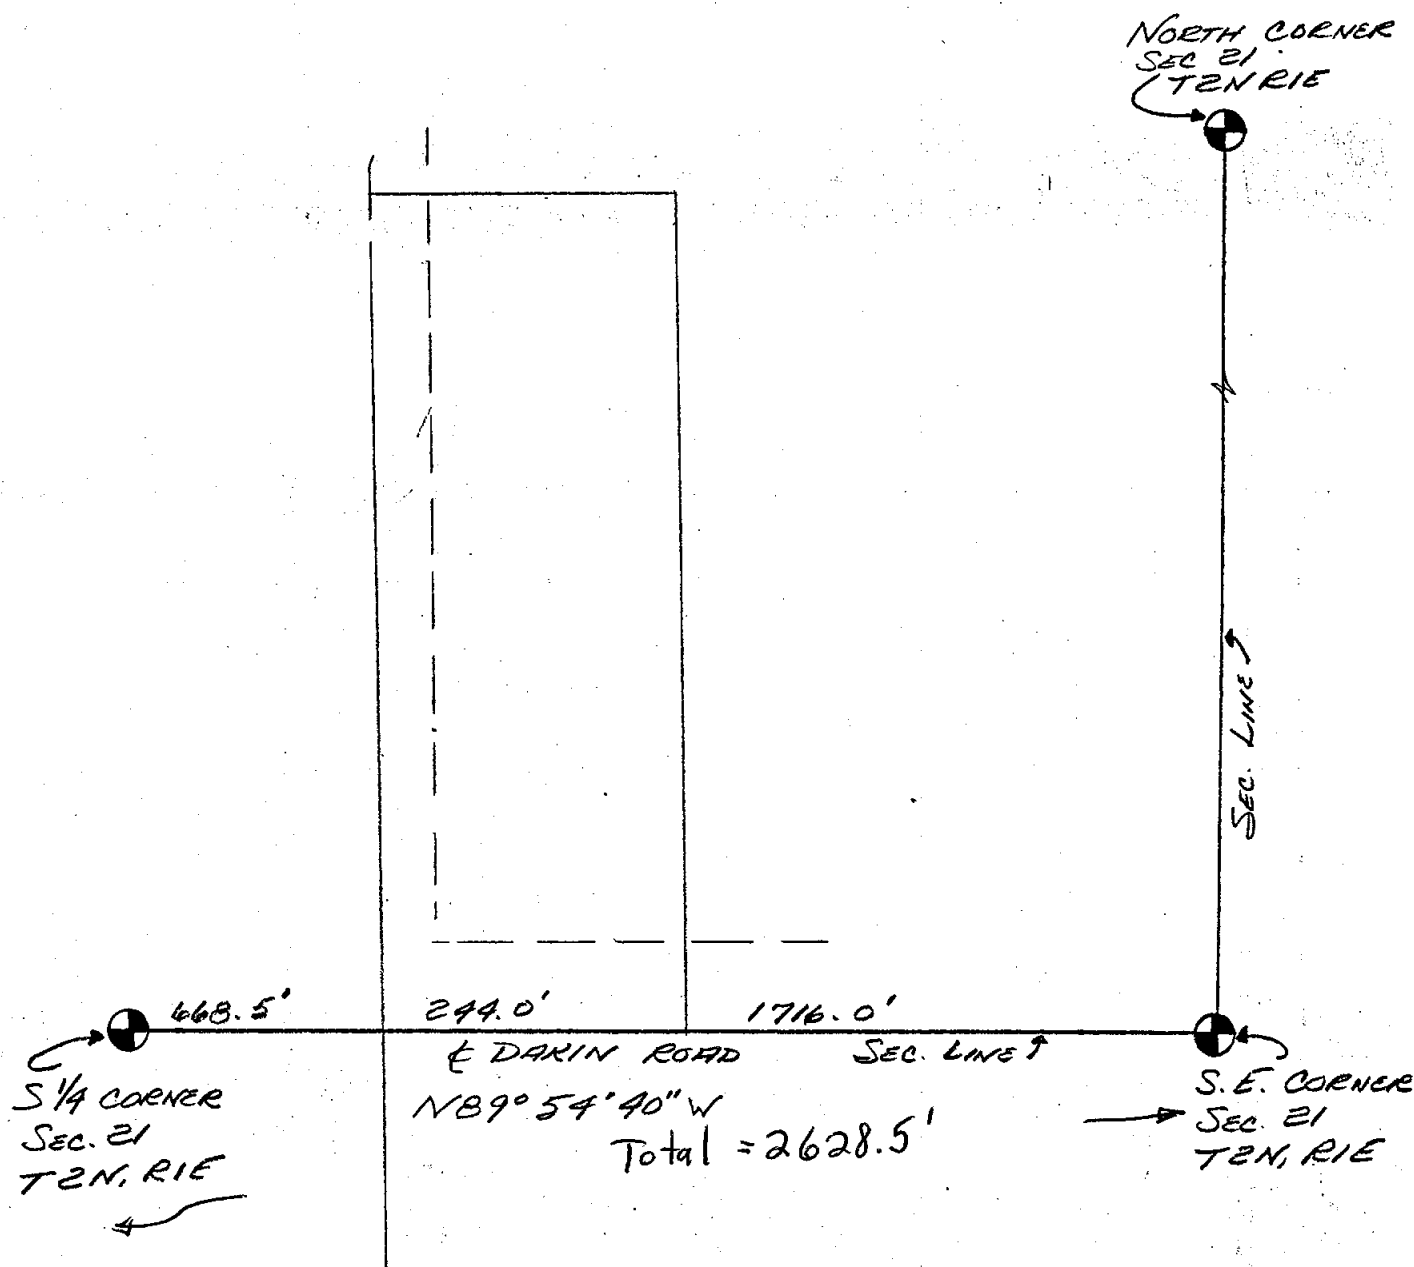

WITNESS TO S 1/4 CORNER


- 1/2" IRON ROD WITH CAP, NORTH 33.0'
- 1/2" IRON ROD WITH CAP, WEST 33.0'
- 1/2" IRON ROD WITH CAP, SOUTH 33.0'

SURVEYOR: AUSTIN WILLIAMS #21275

DATE: APRIL 10, 1977

1716.0
244.0
668.5
2628.5 Total

SOURCE: RECORD CO. SURVEYOR Vol. 2 PAGE 98
TRANSCRIBED from ORIGINAL on file at RECORD OFFICE
DUPLICATE

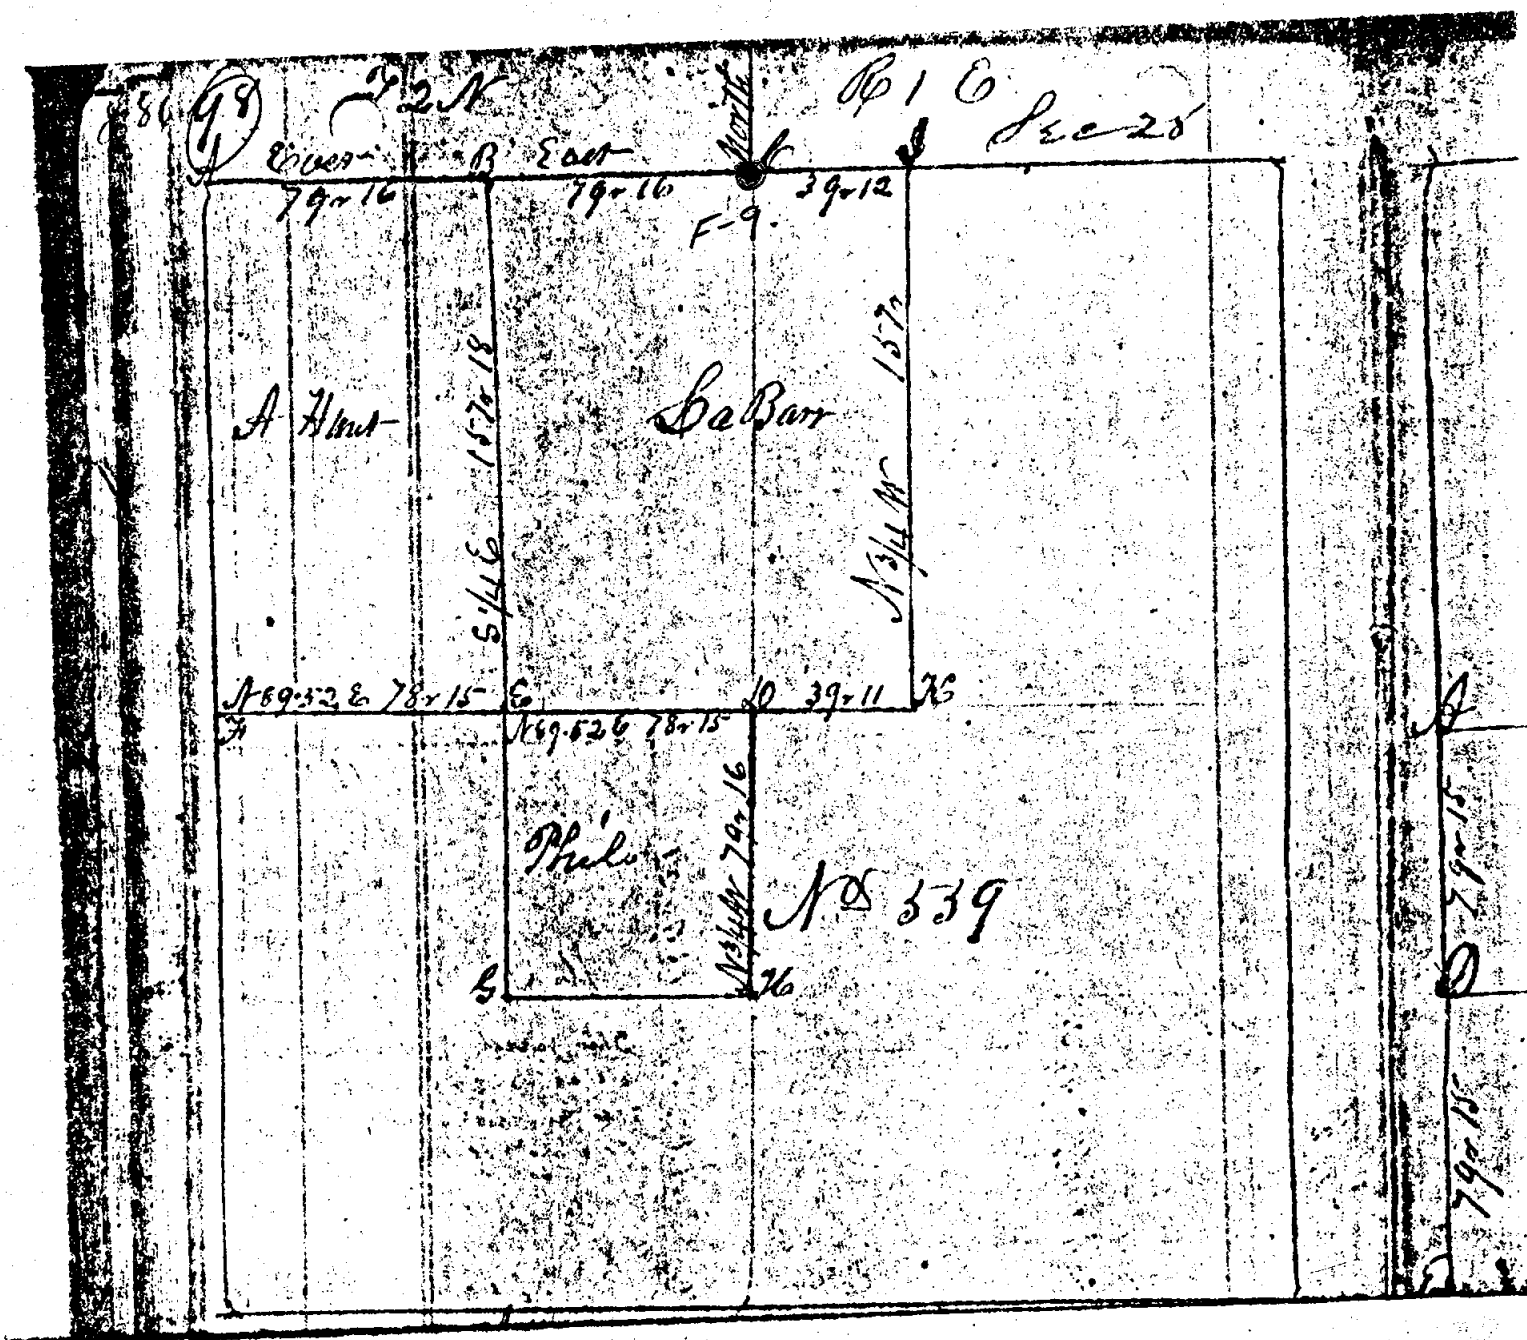


SOURCE: RECORD CO. SURVEY Vol. 2 PAGE 98
 TRANSCRIBED from ORIGINAL on file at RECORD OFFICE

F-9

W Oak	16 in	S 33 1/2 W	29 1/2
A B Oak	18	S 69 E	30
B Oak	8	S 34 1/2 W	10
C Oak	11	N 71 1/2 W	10
D Oak	5	N 49 W	7 1/2
E Oak	11	S 7 E	23
F Oak	10	S 29 1/2 E	7 1/2
no other tree			
G Oak	9	S 19 E	15
H Oak	4	N 57 1/2 E	9
I Oak	8	S 59 1/2 W	37
J Oak	9	N 40 1/2 E	41
K Oak	12	N 58 W	12
L Oak	8	N 73 E	32
M Oak	10	N 76 E	4 1/2
N Oak	14	N 88 1/2 W	19
O Oak	24	N 68 W	66
P Oak	18	N 26 1/2 E	44
Q Oak	6	S 22 E	38
R Oak	40	S 78 E	33
Run by the town line			
Van E			

98

SOURCE: RECORD CO. SURVEYOR Vol. 2 PAGE 165 YR. 1853
TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at RECORD OFFICE

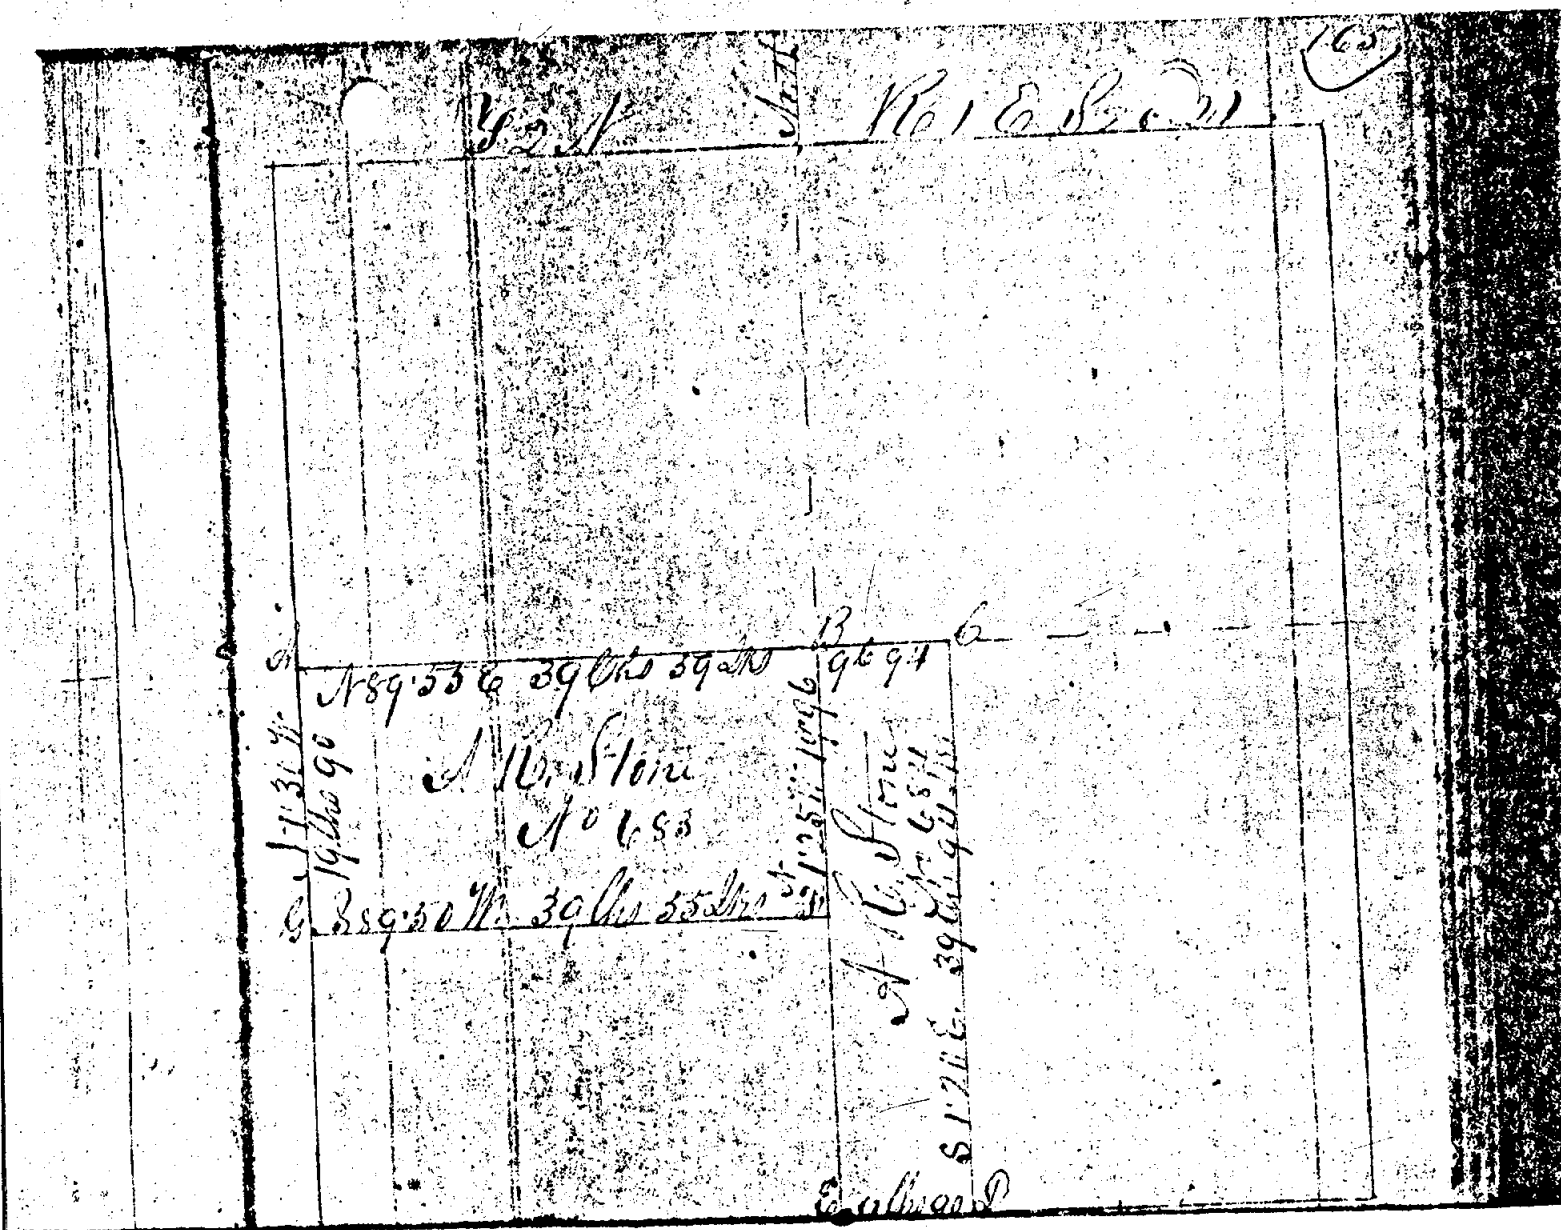

F-9

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at RECORDS OFFICE

F-9

21

56

19.

9

271

24

Buck 8 in S 47 1/2 W. 18 1/2	Elm 12. S 10 1/2 E. 24
do 6 N 11 E. 13	Olympus 5 N 17 W. 23 1/2
B. Oak 5 S 77 E. 49	do 10 S 86 E. 66
do 11 N 23 1/2 E. 36	do 13 N 28 E. 61 1/2
Cotton 10 N 54 E. 7 1/2	B. Oak 12 S 20 E. 5 1/2
do 8 S 24 W. 22	do 8 N 81 1/2 E. 11 1/2
W. Oak 15 N 20 E. 45	
do 20 N 67 1/2 W. 67	

Run by the Meridian Van 2³/₄ E.
Surveyed by Daniel Holmes Drpg. Co Surveyor
Signed 23rd 1853
Recorded by A. Jackson Co Surveyor

Surveyor

165

SOURCE: G.L.O. MAP #5

TRANSCRIBED from ~~ORIGINAL~~ on file at REMON. OFFICE
DUPLICATE

SURVEYOR'S NAME _____ SURVEYOR NO. _____


DATE OF SURVEY _____ SECTION NO. 21-28

MAGNETIC VARIATION 4° 45' E

WRITTEN DISTANCE GIVEN BETWEEN E-9 AND G-9 = 79.50 CH.

ASSUMED DISTANCE BETWEEN E-9 AND F-9 = 39.75 CH.

" " " F-9 AND G-9 = 39.75 CHS

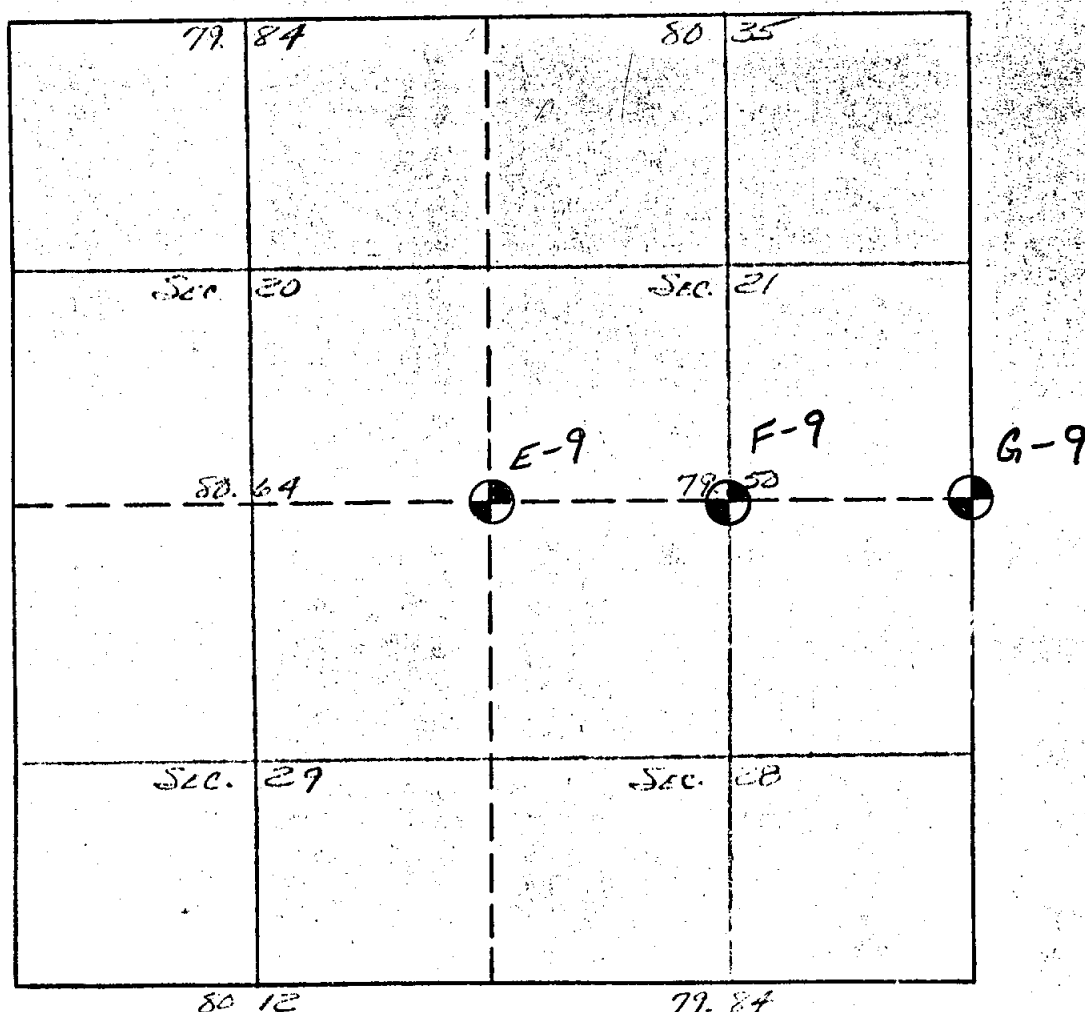

NOT TO
SCALE

INGHAM
TOWNSHIP

T 2 N, R 1 EW

F-9
CORNER CODE

4
ATTACHMENT NO.

P. 1 of 1

SOURCE: G. L. O. Field Notes P. 40

TRANSCRIBED from ~~RECORD~~ on file at REMON. OFFICE

40

C on R^{du} Clu 21 + 28
10.00 en Sm
25.00 le Lam Sm
4.00 per t^uu gr p
73.75 Am f^uer Co N
79.50 Enr N + S line 10 l^uss Sg p

N. Co Clu 21 + 28

39.75 per gr p at act ju
Be 5 N 49 N 7 1/2 } F-9
Elu 11 S 7 E 23
79.50 to Recler.

N. Clu 20 + 21

3.68 N 0 21
14.58 Elu 18
40.00 per gr p f^u

41

Be 8 S 47 N 13
" 6 N 10 E 13
43.85 Be 8
62.86 B 0 7
63.00 en Lam Sm
80.00 per p Cor 16, 17, 20 + 21, in Sm. p^u
Lam 16 N 15 E 18
" 6 S 36 E 5


C on R^{du} Clu 16 + 21

80.00 le Sm
40.00 per t^uu gr p
44.00 en Lam Sm
53.00 le " "
80.35 Enr N + S line 8 l^uss Sg p

N. Co Clu 16 + 21

SOURCE: Index #1 P 63
 TRANSCRIBED from ORIGINAL on file at REGION. OFFICE
 DUPLICATE

Town 2 N, Range 1 E Section No. 25

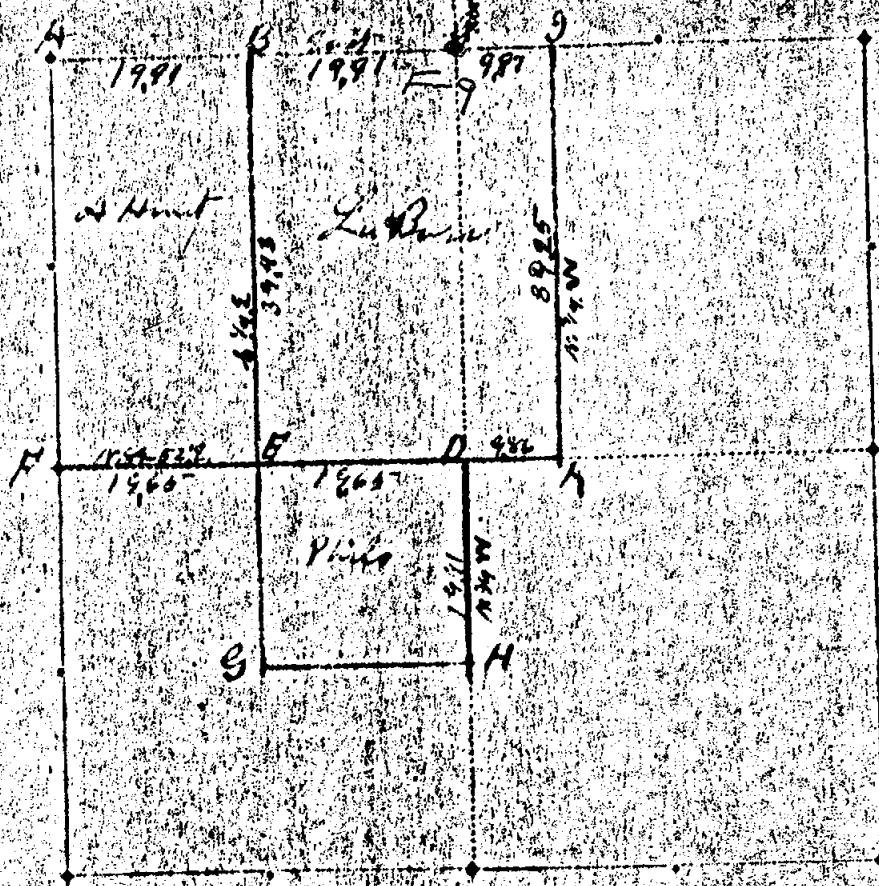

F-9

Section	Owner	Area	Bearing	Links	Section	Owner	Area	Bearing	Links
A	W. Hunt	16	S. 23° 45' W.	25	J	W. Hunt	24	N. 16° 45' W.	66
B	R. Hunt	15	S. 23° 45' W.	25	K	W. Hunt	18	N. 16° 45' W.	44
C	P. Hunt	11	S. 23° 45' W.	19	L	P. Hunt	6	S. 23° 45' W.	28
D	H. Hunt	11	S. 23° 45' W.	19	M	H. Hunt	10	S. 23° 45' W.	33
E	W. Hunt	11	S. 23° 45' W.	19					
F	D. Hunt	11	S. 23° 45' W.	19					
G	W. Hunt	11	S. 23° 45' W.	19					
H	D. Hunt	11	S. 23° 45' W.	19					
I	W. Hunt	11	S. 23° 45' W.	19					
J	D. Hunt	11	S. 23° 45' W.	19					
K	W. Hunt	11	S. 23° 45' W.	19					
L	D. Hunt	11	S. 23° 45' W.	19					
M	W. Hunt	11	S. 23° 45' W.	19					
N	D. Hunt	11	S. 23° 45' W.	19					
O	W. Hunt	11	S. 23° 45' W.	19					
P	D. Hunt	11	S. 23° 45' W.	19					
Q	W. Hunt	11	S. 23° 45' W.	19					
R	D. Hunt	11	S. 23° 45' W.	19					
S	W. Hunt	11	S. 23° 45' W.	19					
T	D. Hunt	11	S. 23° 45' W.	19					
U	W. Hunt	11	S. 23° 45' W.	19					
V	D. Hunt	11	S. 23° 45' W.	19					
W	W. Hunt	11	S. 23° 45' W.	19					
X	D. Hunt	11	S. 23° 45' W.	19					
Y	W. Hunt	11	S. 23° 45' W.	19					
Z	D. Hunt	11	S. 23° 45' W.	19					

Run by the true meridian. Magnetic variation 3 degrees 0 minutes 2.
 Surveyed the 1st day of August 1898 by
A. J. Jackson
 County Surveyor of Ingham County, Michigan.

Sec. 28

Traverse Point No. 11,029

Tech. Sup'r. L. BRYAN

Company POLARIS

Field Squad GENERAUX #4
MARTIN

Township Ingham

Recorded Corner Code G-7


Date 4-12-78

According to L.I. - Pg. 163

N

Sketch and describe roads, monuments found or set, and witness established:

- 1) Fd. N+T N.W. side 28",
S 50° W 69.51'
- 2) Fd. N+T E side Tel Pole
N 38° W 50.20'
- 3) Fd. N+T side Tel Pole
N 75° E 136.25'

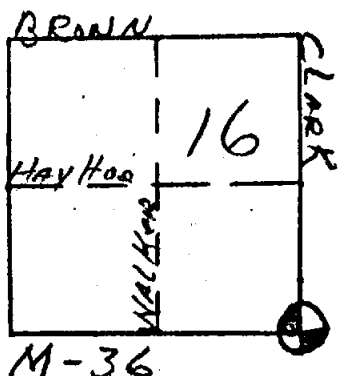

DANSVILLE

Fd. "T" bar 0.80' N of Intersection
Note, E. side of 8" hole

#1

CLARK

G-7

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 20, 1971
DISTRIBUTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS

TRAVERSE POINT WITNESS REPORT

Traverse Point No. 11,029

Tech. Sup'r. L. BRYAN

Company POLARIS

Field Squad GENERAUX #4
MARTIN

Township Ingham


Recorded Corner Code G-7

Date 4-12-78

According To L.I - Pg. 163

Sketch and describe roads, monuments found or set, and witness established:

- 1) Fd. N+T N.W. side 28"
S 50° W 69.51'
- 2) Fd. N+T E side Tel Pole
N 38° W 50.20'
- 3) Fd. N+T side Tel Pole
N 75° E 136.25'

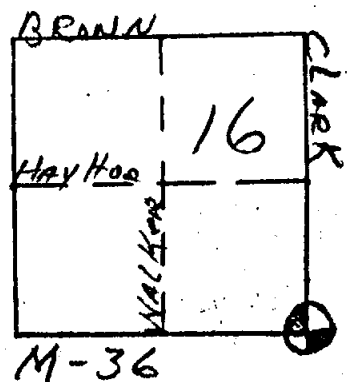

DANSVILLE

Fd. "T" bar 0.80' N of INTER section
Note: E. side of 8" hole

#1


CLARK

G-7

SIGNED BY _____ DATE _____
APPROVED AND SIGNED BY _____ DATE _____

SURVEYOR'S MICHIGAN REGISTRATION NO. _____

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 20, 1971
DISTRIBUTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS

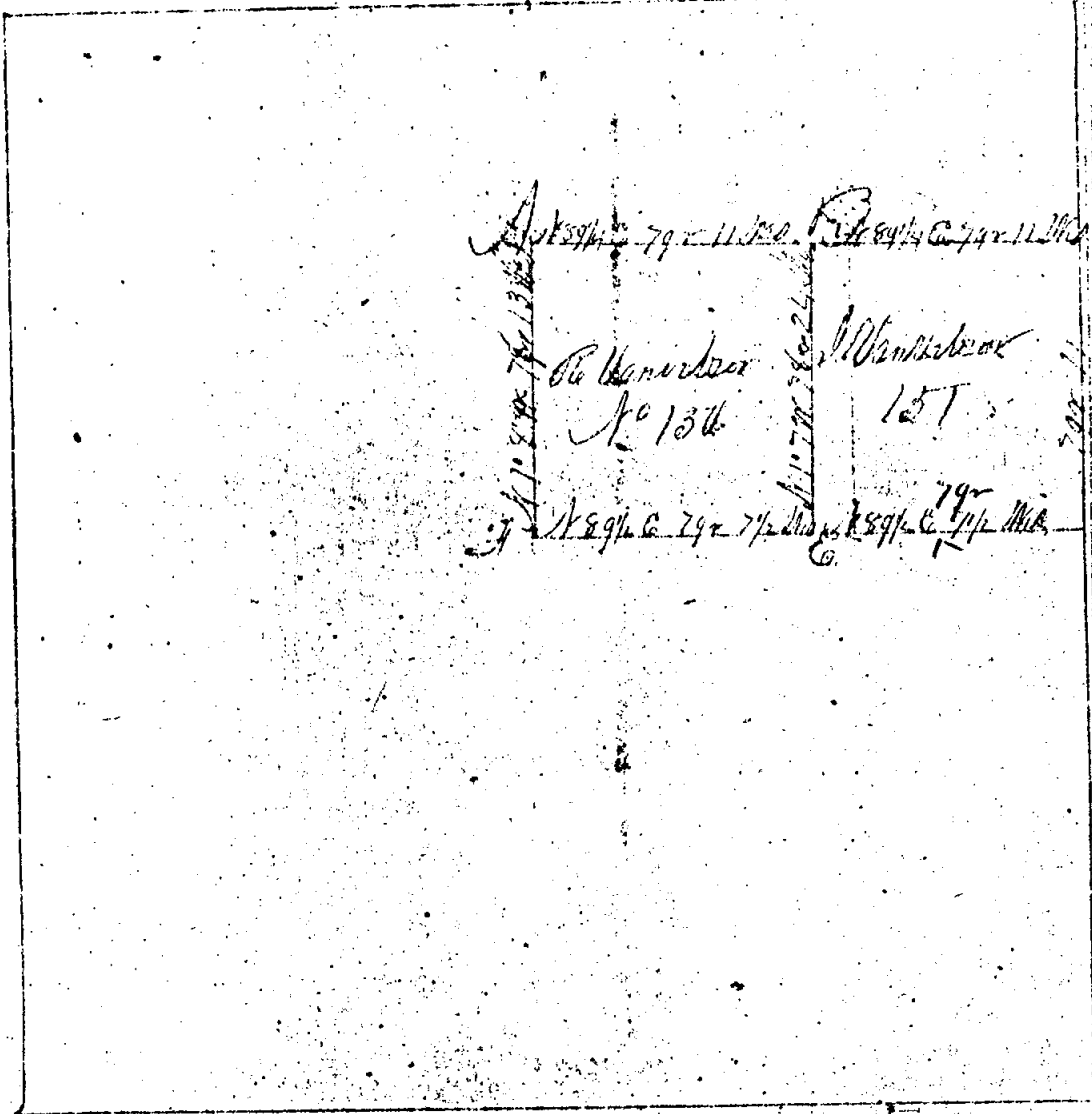


79-11-1/2
13 1/2
15 1/2
79-11-1/2
C

14 in S 11 W 33 Mo
 11 in N 82 1/2 E 39 Mo
 17 in S 40 W 21 Mo
 13 in S 40 E 23 1/2 Mo
 34 in N 11 W 22 Mo
 24 in N 31 E 35 Mo
 7 in S 82 W 10 Mo
 24 in N 24 W 18 Mo
 17 in S 1/2 E 21 Mo
 18 in S 1/2 W 9 Mo
 7 in S 77 1/2 E 49 Mo
 12 in N 23 1/2 E 56 Mo
 Run by the true meridian from 3/4 E
 Surveyed and Recorded April 21 1841
 by A. Jackson Surveyor

122 No 1 Dec 21


RECORD OF
ING. CO.
SURVEYOR
V. 1 p. 162
DUP. AT
REMAN.
OFFICE

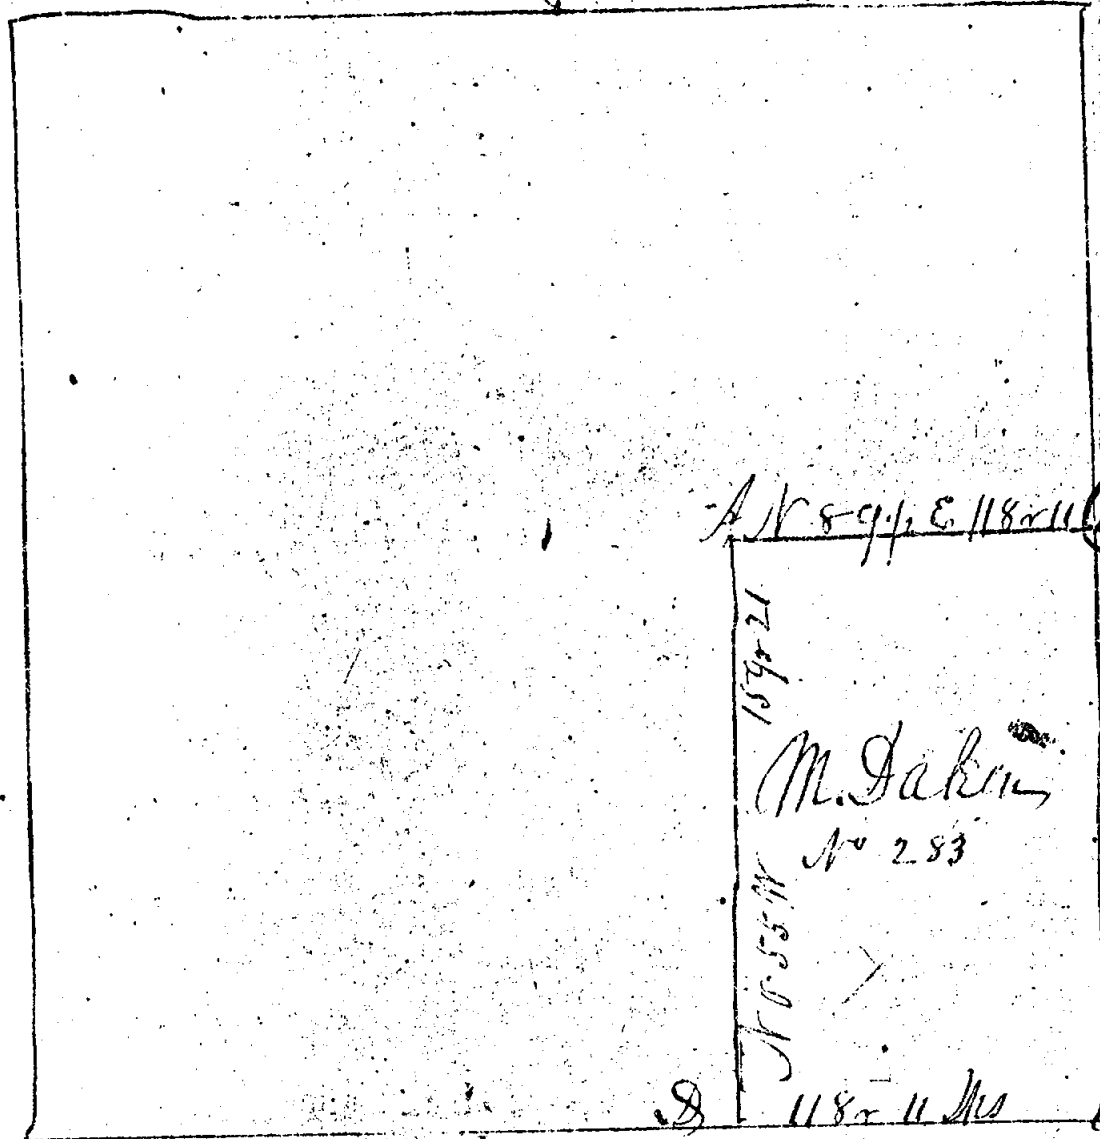

- Maple 10 N 58 E 6 Lbs
A Maple 8 S 20 1/4 W 23 Lbs
→ B Ash 7 S 82 W 10 Lbs ←
E Elm 9 N 24 W 18 Lbs
C Oak 9 N 16 E 82 1/2 Lbs
D B Ash 10 S 37 1/2 W 51 1/2 Lbs
E W Oak 18 N 26 1/2 E 44 1/2 Lbs
F W Oak 24 N 68 W 66 Lbs
Run by the true Meridian Van 3 1/2 E
Surveyed & measured Jan 15 by
A. Jackson Co. Surveyor

This same record appears in No 5165 in
Vol 2 Page 97 and dated Dec 10th 1848

No 338

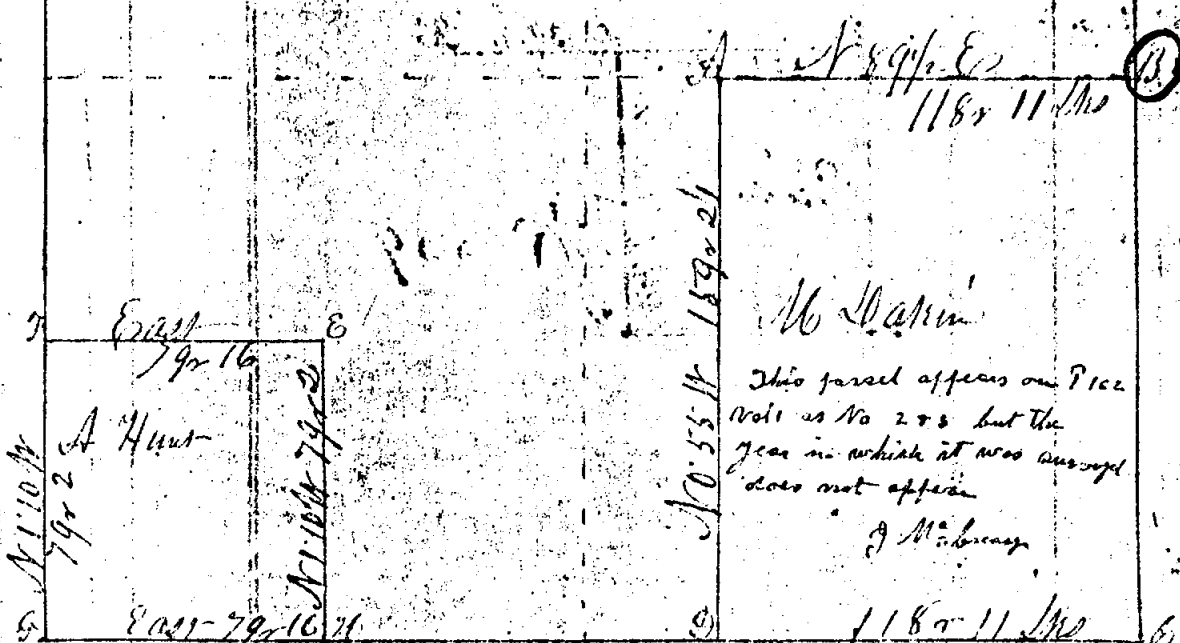

→	Patch	7 1/2	S 82 W	10 Mo	←
	Elm	9	N 24 W	18	
	Pine	9	N 76 E	82 1/2	
	Elm	8	N 89 1/2 W	5 1/2	
	W Oak	18	N 20 1/2 E	44 1/2	
	do	24	N 68 W	66	
	C Bush	6	S 41 E	17	
	C Log	7	S 19 1/2 W	88	
	F Patch	11	S 23 1/2 E	5 1/2	
	do	9	N 82 1/2 E	12	
	C W Oak	16	S 23 1/2 W	29	
	B Oak	18	S 69 E	30	
	M Pine	8	S 34 1/2 W	10	
	do	11	N 71 1/2 W	10	

Run by the late American Tar 30
Surveyed by A. Jackson Dec 16/48

SOURCE: G.L.O. FIELD NOTES: p. 33

TRANSCRIBED from ORIGINAL on file at RIMON. OFFICE
DUPLICATE

33

4000 set tin gr p
8042 Ins No. line 12 NW 45.0


11 Cstn 22+27
40.21 set gr p at ant fu
RD 8 N 44 W 30
" 11 S 52 E 17
80.42 to Sec. Cor.

N Cstn 21-22
5.48 Be 20
25.97 " 21
4000 set 91 p 100
Set 7 S 82 E 10
Set 9 N 24 E 18
71.38 Aug 12
75.98 Be 21
80.00 set p Cor 15.16.21-22

TRANSCRIBED from ~~ORIGINAL~~ on file at Reman. OFFICE
DUPLICATE

Town 2 N. Range 1 E.

Section No. 21

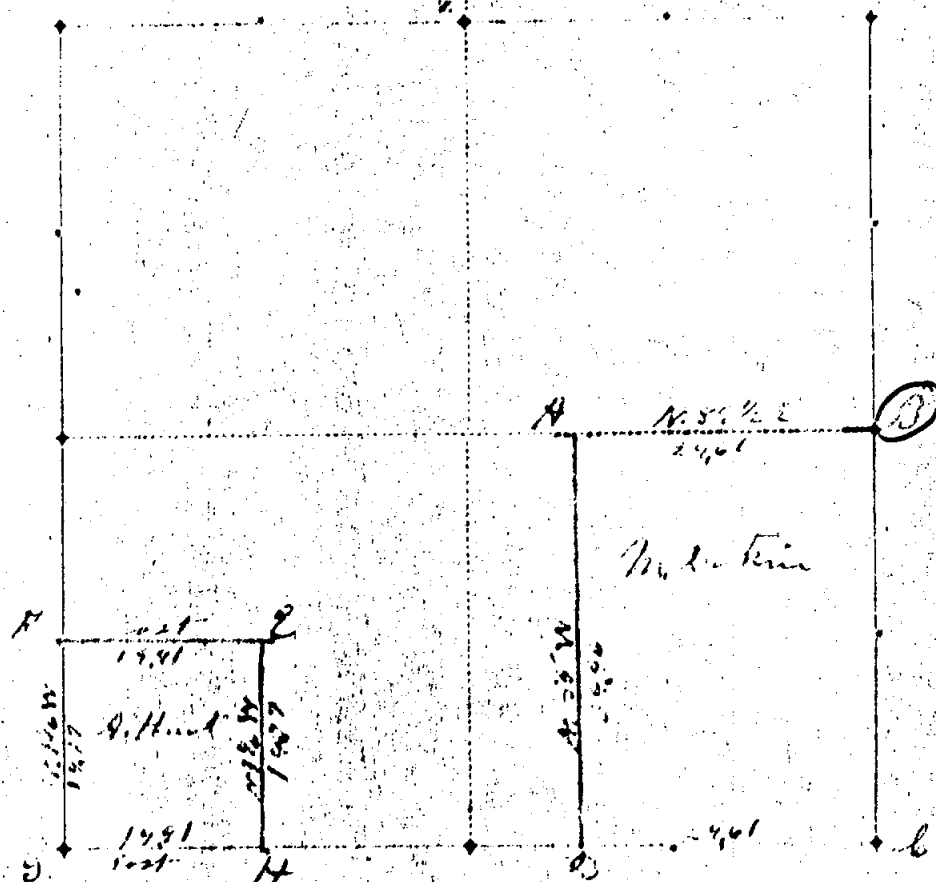

Section	Timber.	Diam	Bearing	Links.	Section	Timber.	Diam	Bearing.	Links.
A	W. Oak	7	S. 82 W	10					
B	W. Oak	9	N. 24 W.	18					
C	W. Oak	9	N. 16 E.	82 1/2					
D	W. Oak	8	S. 54 E W	51 1/2					
E	W. Oak	12	N. 26 1/2 E	44 1/2					
F	W. Oak	14	N. 68 W	66					
G	W. Oak	6	S. 41 E.	17					
H	W. Oak	7	S. 19 E W	6 1/2					
I	W. Oak	11	S. 23 1/2 E	3 1/2					
J	W. Oak	9	N. 22 E.	12					
K	W. Oak	16	S. 28 1/2 W	24					
L	S. Oak	17	S. 49 E.	30					
M	W. Oak	8	S. 54 E W	10					
N	W. Oak	11	N. 71 E W	10					

Run by the true meridian. Magnetic variation 5 degrees 1 minutes W
 Surveyed the 16 day of Dec 1882 by

[Signature]
County Surveyor of Ingham County, Michigan.


Sec. 21

SOURCE: FOLDER SET #1 p. 48

TRANSCRIBED from ORIGINAL on file at Remon. OFFICE
DUPLICATE

Town 2 N. Range 18

Section No. 7

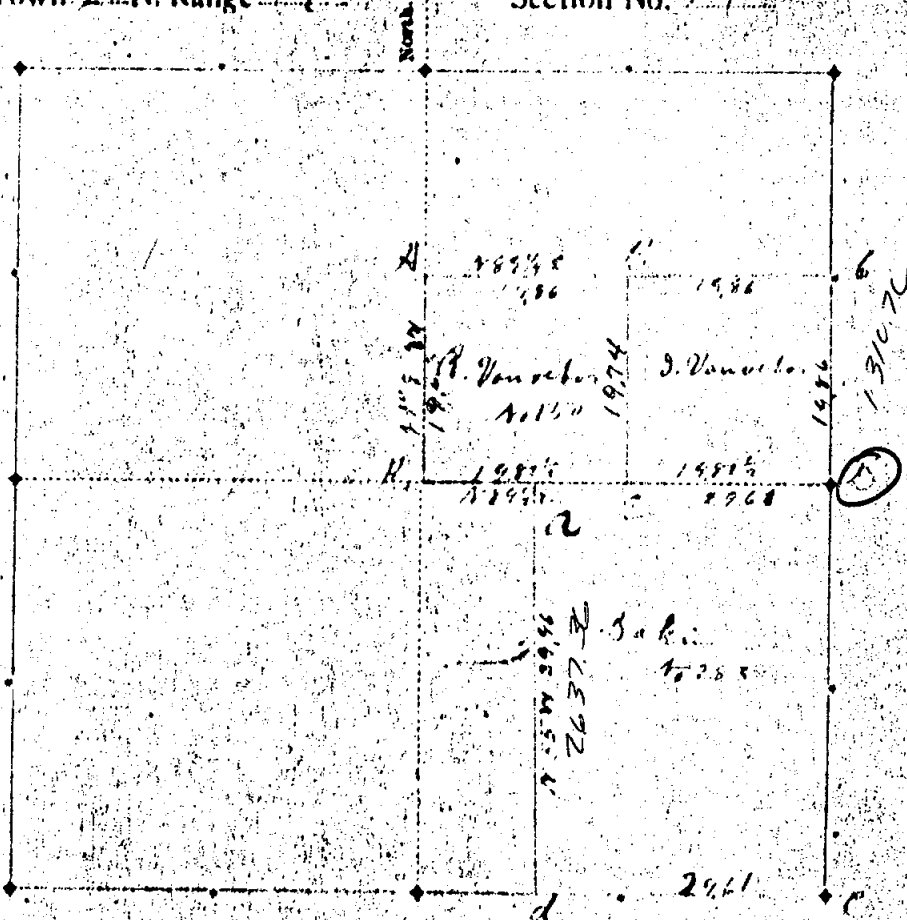

Section	Timber	Diam	Bearing	Links	Section	Timber	Diam	Bearing	Links
A	Dark	14	S. 61° W.	33	A	Dark	10	N. 38° E.	6
B	Dark	11	S. 72° E.	34	B	Dark	8	S. 42° W.	28
C	Dark	19	S. 40° W.	21	C	Dark	4	N. 10° E.	22
D	Dark	13	S. 40° E.	22	D	Dark	10	S. 39° W.	51
E	Dark	34	N. 11° W.	22	E	Dark	18	N. 26° E.	44
F	Dark	34	S. 36° E.	33	F	Dark	24	N. 66° W.	66
G	Dark	9	S. 82° W.	10	G	Dark	24	N. 66° W.	66
H	Dark	9	N. 14° W.	18	H	Dark	24	N. 66° W.	66
I	Dark	17	S. 61° E.	31	I	Dark	24	N. 66° W.	66
J	Dark	18	S. 16° W.	31	J	Dark	24	N. 66° W.	66
K	Dark	9	S. 77° E.	19	K	Dark	24	N. 66° W.	66
L	Dark	12	N. 13° E.	26	L	Dark	24	N. 66° W.	66

Run by the true meridian. Magnetic variation 3 degrees 10 minutes W.

Surveyed the 21 day of Apr 1881 by

1881
1881
1881

J. J. J.
County Surveyor of Ingham County, Michigan.

Sec. 21

SOURCE: CORNER REGULATION CERTIFICATE

TRANSCRIBED from ORIGINAL on file at REGISTER OF DEEDS
~~DUPLICATE~~

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970

LINER 3 PG 91

FOR CORNERS OF: LOCATED IN:

1. PUBLIC LAND SURVEY 27.30 3 8 N 1 8

2. PROPERTY CONTAINING IN SECTION 7 N 8 E 8

3. NE 1/4 SECTION 7 N 8 E 8

4. LOT NO. RECORDED PLAT

5. PRIVATE CLAIM

CORNER CODE NUMBER H-9, G-9 G-11

JUL 14 1974
REGISTER OF DEEDS
INGHAM COUNTY, MICH.

REGISTER OF DEEDS STAMP AND
FILING NUMBER

I, CAROL BOSS do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram - over) were, in a field survey on November 24, 1973, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules thereof as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on 19, found, recovered, re-established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law.

FILED

A. Description of original monuments and accessories and, or subsequent restoration:

G-9 Unknown
H-9 Unknown
H-11 Unknown

APR 25 9 20 AM '74

REGISTER OF DEEDS
CAROL M. BOSS
INGHAM COUNTY, MICH.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

G-9 2" pipe fd., P.S. post
H-9 1/4" solid bar fd.
H-11 3/4" iron set at fence intersection (apparent occupied NE corner)

C. Description of monuments for corner and accessories established to perpetuate locating the position of the corner:

G-9 NW corner, Sec. 27
N. 89°W. 89.67' fd. 010990 Nail & Cap S/E 4-10" Oak
N. 56°W. 42.10' fd. 010990 Nail & Cap S/E Beechnut
S. 66°E. 62.50' fd. 010990 N/S R.R. Tie fence post

G-11 NE CORNER, Sec. 33
N. 24°W. 7.27' Nail E/S 6" tree
N. 80°W. 8.54' Nail S/S 8" tree
N. 60°E. 3.93' Nail NW/S 8" tree

H-9 N 1/4 corner, Sec. 27
S. 81°W. 116.54' N/W/S 12" Maple
N. 35°W. N/S/S 24" Twin Hickory 26.15
North N/W/S 10" Hickory 22.69

H-9
S 81°W 116.54' N/W/S 12" Maple
N 35°W 26.15' N/E/S 24" Twin Hickory
North 22.69' N/W/S 10" Hickory

SIGNED BY Carol Boss

DATE

4-10-74

SURVEYOR'S MICHIGAN REGISTRATION NO. 11976

FOR STATE AND UNITED STATES A.C.M. 103

SIGNED BY

DATE

APPROVED AND SIGNED BY Carol Boss

DATE

SURVEYOR'S MICHIGAN REGISTRATION NO.

Form No. 10-0700
Revised May 9, 1966

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 20, 1971
ADOPTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS

G-9 H-9

SOURCE: CORNER RECORDATION CERTIFICATE

TRANSCRIBED from ORIGINAL on file at REGISTER OF DEEDS
~~Duplicate~~

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970

LIBER 3 PG 91

FOR CORNERS OF: LOCATED IN:

1. PUBLIC LAND SURVEY 27,32 2 N. R. 1 E.

2. PROPERTY CONTROLLING IN SECTION T. N. R. E.

3. MISCELLANEOUS PROPERTY IN SECTION T. N. R. E.

4. LOT NO. RECORDED PLAT

5. PRIVATE CLAIMS

CORNER CODE NUMBER H-9, G-9, G-11

H-9, G-9, G-11

JULIA L. LAMMUN

REGISTER OF DEEDS

INGHAM COUNTY, MICH.

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, Oscar Ross do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index diagram - over) were, in a field survey on November 21, 1973, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on 19, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

FILED

A. Description of original monument and accessories and/or subsequent restoration:

G-9 Unknown
H-9 Unknown
G-11 Unknown

APR 25 9 20 AM '74
REGISTER OF DEEDS
Paul M. Lewis
INGHAM COUNTY, MICH.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

G-92" pipe fd., P.R. set
H-9 3/4" solid bar fd.
G-11 3/8" iron set at fence intersection (apparent occupied NE corner)

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

G-9 NW corner, Sec. 27
N. 68°W. 89.67 fd. #18998 Nail & Cap S/S 4-10" Oak
N. 56°W. 42.10 fd. #18998 Nail & Cap S/S Beechnut
S. 66°E. 62.50 fd. #18998 N/S R.N. Tie fence post

G-11 NE CORNER, Sec. 33
N. 24°W., 7.27 Nail E/S 6" tree
N. 80°W. 8.54 Nail S/S 8" tree
N. 50°E. 3.93 Nail NW/S 6" tree

H-9 N 1/4 corner, Sec. 27
S. 81°W. 116.54 N/W/S 12" Maple
N. 35°W. N/E/S 24" Twin Hickory 26.15
North N/W/S 10" Hickory 22.69

SIGNED BY Oscar Ross DATE 4-10-74

SURVEYOR'S MICHIGAN REGISTRATION NO. 13574

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY DATE

APPROVED AND SIGNED BY DATE

SURVEYOR'S MICHIGAN REGISTRATION NO.

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 28, 1971
DISTRIBUTED BY MICHIGAN SOCIETY OF REGISTERED LAND SURVEYORS