

SOURCE:

Record Co. Survey Vol. 2 Page 11

TRANSCRIBED from

~~ORIGINAL~~

DUPLICATE

on file at

REMON OFFICE

[B]

C

Buttress 6m S. 44° W. 34 Ehs. & Radiak 8m S. 78° E. 9 Ehs. 3m
Bench 4m S. 47° W. 34 Ehs. & Hickory 16m S. 46° W. 35 Ehs.
The other corners E. D. I. K. L. M. N. O. P. Q. R. are posts without
bearing trees

[A to B, East Variation N. 14 1/2 Ehs.

C to D S. 47° W. 34 Ehs.

G to H N. 0° 33' E. Var. E. 3 1/2 Ehs.

P to O N. 88° 54' W. 10 Ch. Var. S. 2 Ehs.

I to K N. 33° E. Var. E. 1 1/2 Ehs.

H to M, N. 87° 54' W. Var. N. 3 Ehs.


Note: In running the lines G. H. I. K. L. M. N. O. and also E. M. H. M.
and P. O. the minutes feet by the needle were guessed at
thence the trifling variation of these lines.

Run by the true Mer. Var. 2° E.

Surveyed November 25th 1854 for Harris & Radiak by
Thomas J. Brown

COPY OF MINUTES OF SURVEY.

Parcel of land in Sections 14, 15, 22 & 23 Town 14 North Range 2 N. Meridian of Michigan.

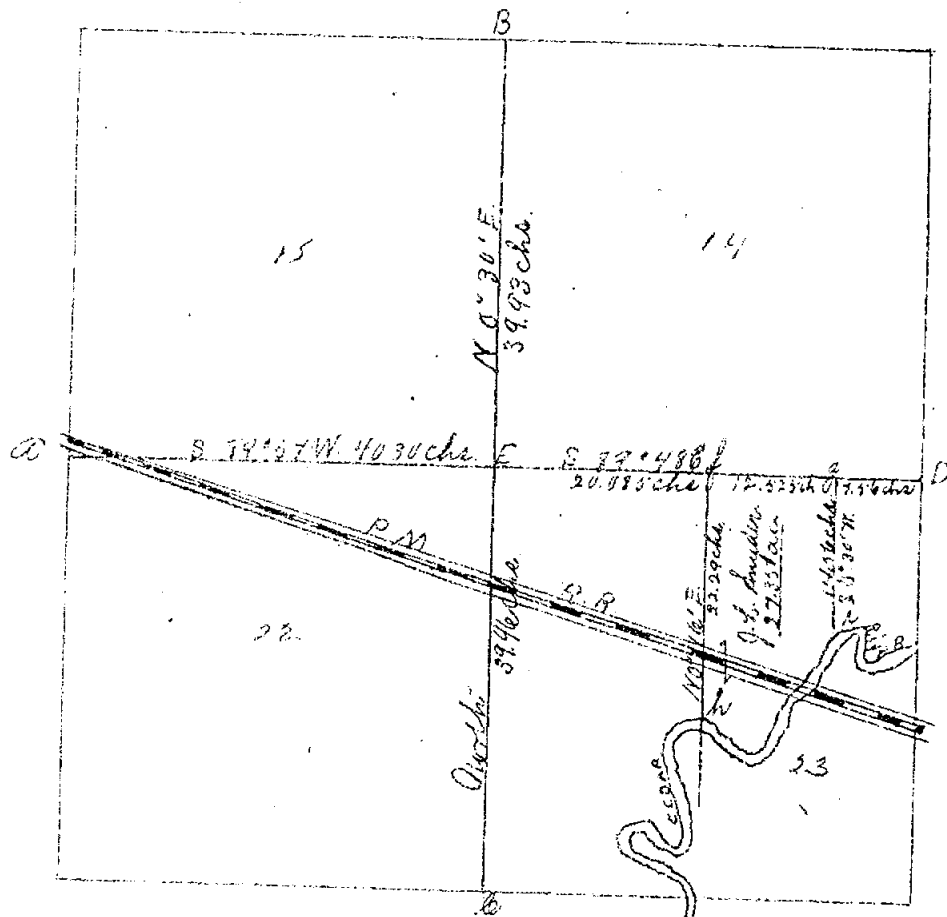

- A. Quarter post between Section 15 & 22 Old gas pipe O.B.S. by One Creary
- B. Quarter post between Section 14 & 15 Iron pin in Street. Railway tracks f. r. cor. of wall S. N. by - 140 1/3 l.
- C. Quarter post, Section 22 & 23 O.B. f. r. cor. of wall N. N. by - 130 1/4 l. S. f. r. R. R. Notice N. 33 1/4 E. - 116 l.
- D. Quarter post between Section 14 & 23 Set I shaped (dbl) from old radiator 2 ft. long in bed of Race track 27 1/3 l from pole fence f. r. Rock Elm 10 - N 51 1/4 E - 117 1/2 l.
- E. Section corner of Sections 14, 15, 22 & 23 gas pipe Blue Ash 10 - S 15 1/4 N - 95 3/4 l. and tile no trees.
- f. Set gas pipe - No trees.
- g. Set gas pipe No trees.
- h. Set Oak post f. r. gas pipe 24 ft. long North - 20 l. Swp. Oak 12 N 65 1/2 E - 93 l.
- i. Set post f. r. Hemlock post North - 25 l. Oak 32 - N 20° E - 160 1/2 l.

Commencing at "h" thence up right bank of Cedar River as follows.

Sta	Bearings	chr.
"h"	S 87° E	.79
1	S 58 1/2° E.	1.37
2	S 84 1/4° E.	15.73
3	S 32 1/2° E.	1.38
4	S 74 1/2° E.	1.22
5	N. 44° E.	1.66
6	N. 25 3/4° E.	2.56
7	N. 40° E.	4.43

MINUTES OF SURVEY (Concluded).

8	N. 79 1/4° E.	1.03.	
9	N. 49 1/2° E.	1.245-	
10	N. 22 1/2° E.	4.436	to "1".

The land heron platted as owned by J. L. Snyder (27.35 ac) includes the O. M. R. R. Right of Way. The right of way upon that portion is 1.37 ac.

magnetic variation of 0° 10' N. was allowed.

STATE OF MICHIGAN,

COUNTY OF INGHAM,

ss.

I, E. J. Galpin,

County Surveyor of said County,

Do Hereby Certify that I did, on the application of

J. L. Snyder

make survey as heron platted upon

d.

Section 9, 10, 22, 23, in the Township of Lansing, Town 4, North, Range 2 N.

on April 5th, 8th, 9th and 10th A.D. 1901, and the following persons acted as chainmen, first being duly sworn, to-wit:

A. E. Kocher, H. H. Stittell, E. J. Rugg and Walter Cook

And I Further Certify that I have compared the foregoing copy with the original minutes made by me at the time of the survey, and that it is a full and true copy of the minutes of such survey, which minutes give the magnetic variation at the initial point of the survey.


E. J. Galpin

County Surveyor

COUNTY SURVEYOR'S RECORD,

TOWN Four NORTH, RANGE Two West, MERIDIAN OF MICHIGAN.

Sections 14 and 15, & 22 and 23

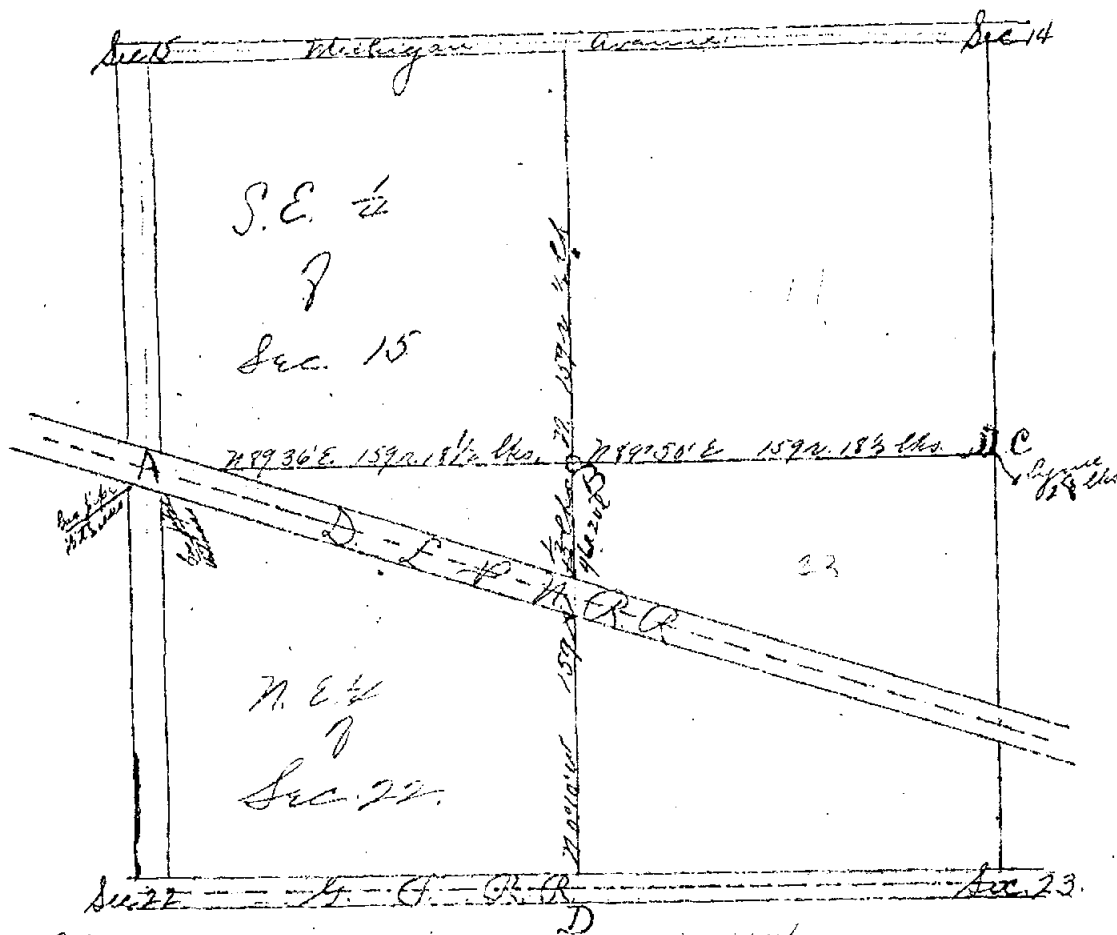

Page 213, Vol. 3.

10/1/1884

TOWN NORTH, RANGE, MERIDIAN OF MICHIGAN.

Gas pipe Gas pipe S43E 84 1/2' 21
 " " S65W 64 22
 " " S26E 22 23
 " " N69°51'W 144 1/2 24
 C & O. R. R. Lake Lynne 18m S2°E 28 lks
 D 4, " " Cedar State Glass & Iron near south
 fence of O. R. R. 2767 lks S from rail of O. R. R.

I-7, I-7, I-8 McCLEARY
 1884
 VOL 3, P 36 13-232

INGHAM COUNTY, MICHIGAN.

TOWN Four North, RANGE Two West, MERIDIAN OF MICHIGAN.

Survey of A.E. by Section Number Twenty Two of T 4 N R 2 W Lansing
 The survey was made for the purpose of locating the quarter post on the
 section line between sections fifteen and twenty two and the quarter
 post between sections twenty two & twenty three and the section
 corner corner between sections fourteen and fifteen and twenty two and twenty
 three, The corners being marked in the plat by the letters A, B, C & D.
 The corner D was found by the remains of U.S. tree given in the U.S.
 Survey and the old stake was dug out and the corner replaced with a
 cedar stake with iron and glass and is in the S. V. R. R. right of way
 four links north of the south fence at marked post. The corner A
 was found by the data of a survey by one Wilmarth made Aug 11th 1873.
 The corner set by Wilmarth seemed to have been entirely removed
 but by his bearing trees and his distance given from the R.R. rail.
 I made an excavation and found a perpendicular hole in the
 clay full of some dark vegetable matter and from its position
 and shape in the clay I am sure it was the remains of an old
 stake as the dark substance assumed a square shape as it
 grew smaller and drew to a point. I drove a piece of gas
 pipe about four feet long where I found the dark spot in the
 clay and set two gas pipe witnesses as per lettered note. The
 corner C was found by the U.S. Witness tree, Spruce, which still remains
 in good condition. The corner B was located and was estab-
 lished by measurement of distance from the corner on Michigan
 Avenue and the corners A, C, D and the distance equally
 divided and the corner established and a piece of gas pipe set
 for a section post and witnessed as per letter note at B.
 in the accompanying plat the scale is 80 rods to one inch.
 and the right hand page of is north on account of more convenience
 in platting. All the work of the survey in all respects was done
 by practical Engineer and two Assistant Engineers J.D.R. and
 W.R.R. Tuttle and Edwards & Perry & Tower of
 Lansing assisted me in the work.

Surveyed May 10th, 11th, 13th, 14th & 15th A.D. 1889.
 Van 00 15 E

Recorded May 22nd 1889.


John M. Creamer
 County Surveyor.

STATE OF MICHIGAN,
COUNTY OF INGHAM,

Received for Record this 27 day of June, A. D. 1907, at 10 o'clock A.M.
Register of Deeds.

COPY OF MINUTES OF SURVEY.

SECTION 11, Town 4N, Range 11W, Meridian of Michigan.

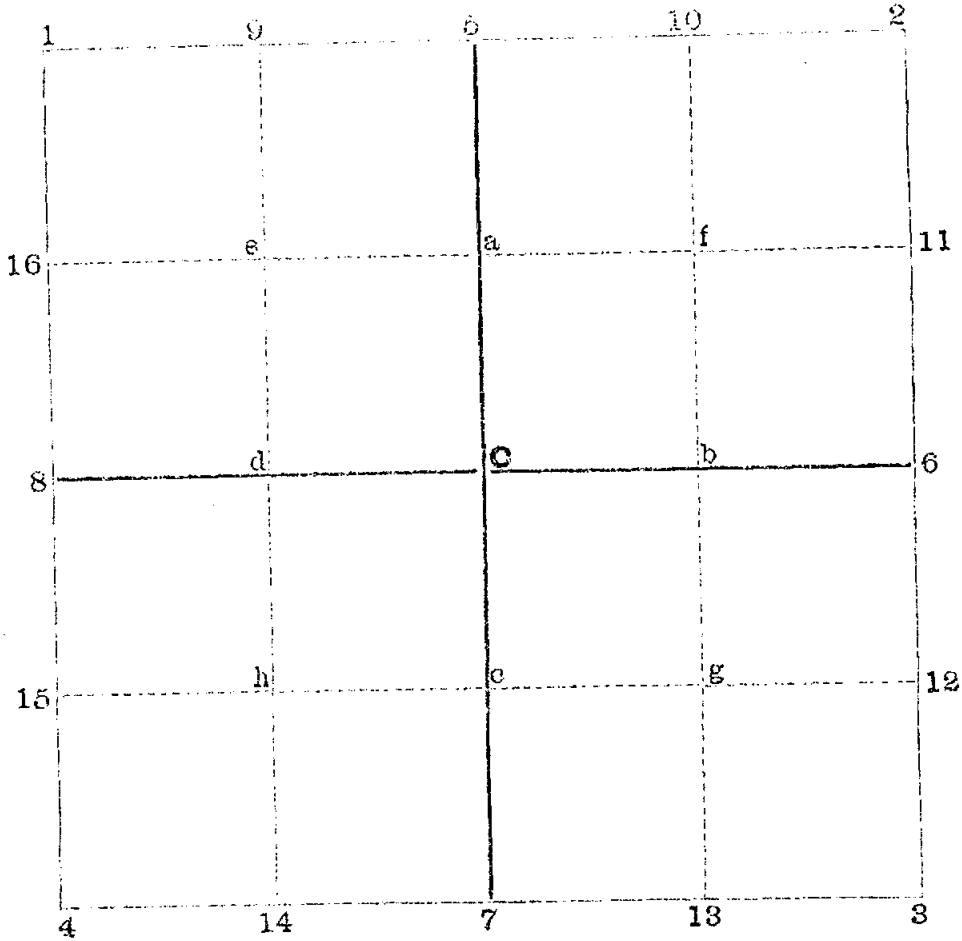

C

Section Corners.
1
2
8
4
3
5
6
7
8
9
10
11
12
13
14
15
1/4 Post on Section Lines.

Gas Pipe

Anchor Post

Post

Gas Pipe Hickory 10" N-E 53.5 lbs Hickory 10" S-W 48.5 lbs

Anchor Post

Gas Pipe O.C.B.S.

Gas Pipe

MINUTES OF SURVEY [Concluded].

a
b
c
d
e
f
g
h

X Posts on X Line

Centers of X Section

Gas pipe

Gas pipe

Corners 10, 5, 7 and 4 were found. The E¹/₄ lot was gone and was west of intersection of section and 1¹/₂ mile. Corners 3, 6, and 11 were lost.

STATE OF MICHIGAN,

COUNTY OF INGHAM,

ss.

R. J. Robb

County Surveyor of said County.

Do Hereby Certify that I did, on the application of

D. Cooley

Section 11 in the Township of Lansing ^{Survey} E¹/₄, Town 4 North, Range 2 W., and the following persons acted as chainmen, first being duly sworn, to-wit:


H. Moun - J. Alcox

And I Further Certify that I have compared the foregoing copy with the original minutes made by me at the time of the survey, and that it is a full and true copy of the minutes of such survey, which minutes give the magnetic variation at the initial point of the survey.

COUNTY SURVEYOR'S RECORD,

TOWN. NORTH, RANGE., MERIDIAN OF MICHIGAN.

SEC. 11

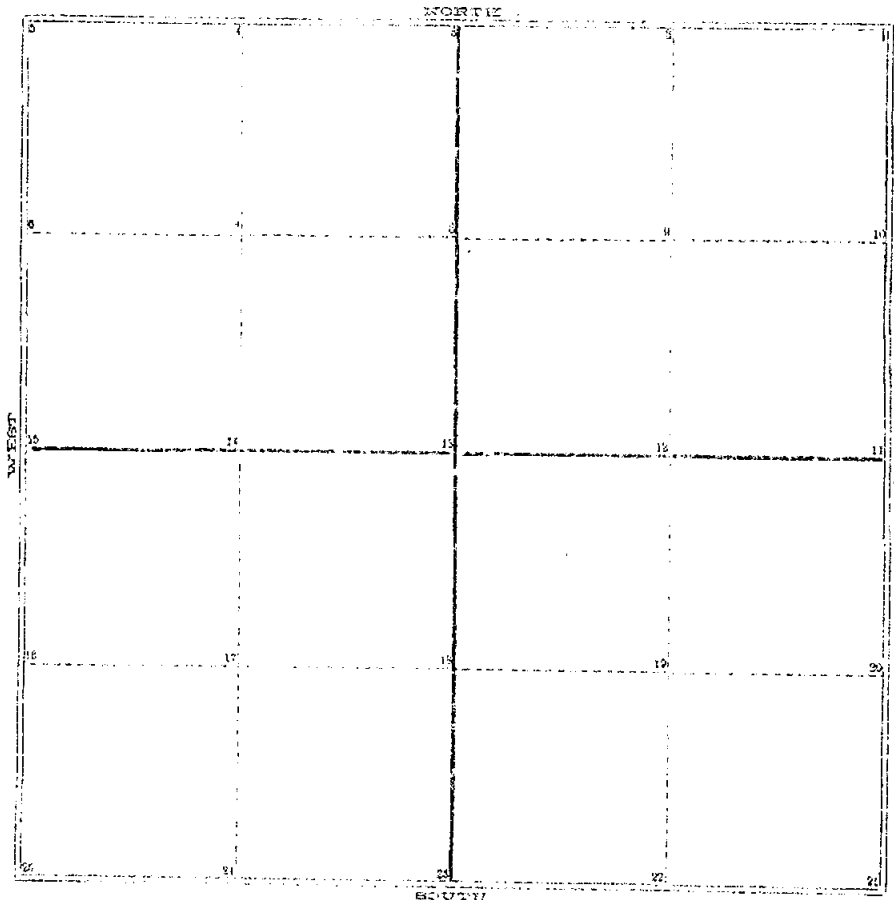

TOWN. NORTH, RANGE., MERIDIAN OF MICHIGAN.

- ✓ Gas
- ✓ 1 pipe
- Gas
- ✓ 2 pipe D.W.C.
- ✓ 3 Post
- 4
- 5
- 6
- 7
- 8
- ✓ 9 Gas pipe
- ✓ 10 " "
- 11 " " Hickory 10' W. E. 33.5 11.5
- 12 " " " 10' S. 11. 48.5 "
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23

INGHAM COUNTY, MICHIGAN.

TOWN St. Ignace NORTH RANGE 2 2000 1 MERIDIAN OF MICHIGAN.Survey on the N.E. 1/4 of Section 11 T24 N18 E20 for
J. C. ColettiJ. H. Moore } Surveyor
C. Selcor } Chairman

Surveyed from 11-12-1909

Corners 2, 3, 4 and 5 were found. The 3rd corner
was gone and was reset at the intersection of the sec
tion and 1/2 line. Corners 9, 10 and 12 were lost.Bounded June 27, 1909
R. J. Robb
J. C. Selcor

R. J. ROBB

ANCHOR POST

JAN 27, 1909

VOL. (2) PG. (264)

I-5