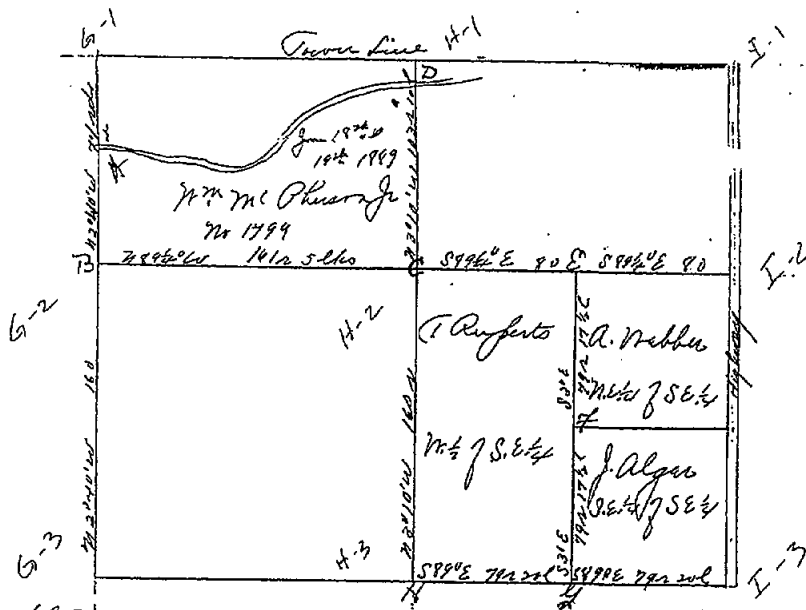


COUNTY SURVEYOR'S RECORD,

TOWN Three North, RANGE Two East, MERIDIAN OF MICHIGAN.Section Three

Page 24, Vol. 3.

TOWN _____ NORTH, RANGE _____, MERIDIAN OF MICHIGAN.

- A 2 Stakes Maple 20 in. S 48° E 29 lks
 B 2 Stakes " 7 " due E 38 " 24
 C 2 Stakes " 8 " S 30° E 6 " 25
 D 2 Stakes " 10 " S 68° W 5 1/2 " 26
 E 2 Stakes " 10 " S 29° W 3 1/2 " 27
 F 2 Stakes " 10 " S 29° W 3 1/2 " 28
 G 2 Stakes " 10 " S 29° W 3 1/2 " 29
 H 2 Stakes " 10 " S 29° W 3 1/2 " 30
 I 2 Stakes " 10 " S 29° W 3 1/2 " 31
 J 2 Stakes " 10 " S 29° W 3 1/2 " 32
 K 2 Stakes " 10 " S 29° W 3 1/2 " 33
 L 2 Stakes " 10 " S 29° W 3 1/2 " 34
 M 2 Stakes " 10 " S 29° W 3 1/2 " 35
 N 2 Stakes " 10 " S 29° W 3 1/2 " 36
 O 2 Stakes " 10 " S 29° W 3 1/2 " 37
 P 2 Stakes " 10 " S 29° W 3 1/2 " 38
 Q 2 Stakes " 10 " S 29° W 3 1/2 " 39
 R 2 Stakes " 10 " S 29° W 3 1/2 " 40
 S 2 Stakes " 10 " S 29° W 3 1/2 " 41
 T 2 Stakes " 10 " S 29° W 3 1/2 " 42
 U 2 Stakes " 10 " S 29° W 3 1/2 " 43
 V 2 Stakes " 10 " S 29° W 3 1/2 " 44
 W 2 Stakes " 10 " S 29° W 3 1/2 " 45
 X 2 Stakes " 10 " S 29° W 3 1/2 " 46
 Y 2 Stakes " 10 " S 29° W 3 1/2 " 47
 Z 2 Stakes " 10 " S 29° W 3 1/2 " 48
 AA 2 Stakes " 10 " S 29° W 3 1/2 " 49
 AB 2 Stakes " 10 " S 29° W 3 1/2 " 50
 AC 2 Stakes " 10 " S 29° W 3 1/2 " 51
 AD 2 Stakes " 10 " S 29° W 3 1/2 " 52
 AE 2 Stakes " 10 " S 29° W 3 1/2 " 53
 AF 2 Stakes " 10 " S 29° W 3 1/2 " 54
 AG 2 Stakes " 10 " S 29° W 3 1/2 " 55
 AH 2 Stakes " 10 " S 29° W 3 1/2 " 56
 AI 2 Stakes " 10 " S 29° W 3 1/2 " 57
 AJ 2 Stakes " 10 " S 29° W 3 1/2 " 58
 AK 2 Stakes " 10 " S 29° W 3 1/2 " 59
 AL 2 Stakes " 10 " S 29° W 3 1/2 " 60
 AM 2 Stakes " 10 " S 29° W 3 1/2 " 61
 AN 2 Stakes " 10 " S 29° W 3 1/2 " 62
 AO 2 Stakes " 10 " S 29° W 3 1/2 " 63
 AP 2 Stakes " 10 " S 29° W 3 1/2 " 64
 AQ 2 Stakes " 10 " S 29° W 3 1/2 " 65
 AR 2 Stakes " 10 " S 29° W 3 1/2 " 66
 AS 2 Stakes " 10 " S 29° W 3 1/2 " 67
 AT 2 Stakes " 10 " S 29° W 3 1/2 " 68
 AU 2 Stakes " 10 " S 29° W 3 1/2 " 69
 AV 2 Stakes " 10 " S 29° W 3 1/2 " 70
 AW 2 Stakes " 10 " S 29° W 3 1/2 " 71
 AX 2 Stakes " 10 " S 29° W 3 1/2 " 72
 AY 2 Stakes " 10 " S 29° W 3 1/2 " 73
 AZ 2 Stakes " 10 " S 29° W 3 1/2 " 74
 BA 2 Stakes " 10 " S 29° W 3 1/2 " 75
 BB 2 Stakes " 10 " S 29° W 3 1/2 " 76
 BC 2 Stakes " 10 " S 29° W 3 1/2 " 77
 BD 2 Stakes " 10 " S 29° W 3 1/2 " 78
 BE 2 Stakes " 10 " S 29° W 3 1/2 " 79
 BF 2 Stakes " 10 " S 29° W 3 1/2 " 80
 BG 2 Stakes " 10 " S 29° W 3 1/2 " 81
 BH 2 Stakes " 10 " S 29° W 3 1/2 " 82
 BI 2 Stakes " 10 " S 29° W 3 1/2 " 83
 BJ 2 Stakes " 10 " S 29° W 3 1/2 " 84
 BK 2 Stakes " 10 " S 29° W 3 1/2 " 85
 BL 2 Stakes " 10 " S 29° W 3 1/2 " 86
 BM 2 Stakes " 10 " S 29° W 3 1/2 " 87
 BN 2 Stakes " 10 " S 29° W 3 1/2 " 88
 BO 2 Stakes " 10 " S 29° W 3 1/2 " 89
 BP 2 Stakes " 10 " S 29° W 3 1/2 " 90
 BQ 2 Stakes " 10 " S 29° W 3 1/2 " 91
 BR 2 Stakes " 10 " S 29° W 3 1/2 " 92
 BS 2 Stakes " 10 " S 29° W 3 1/2 " 93
 BT 2 Stakes " 10 " S 29° W 3 1/2 " 94
 BU 2 Stakes " 10 " S 29° W 3 1/2 " 95
 BV 2 Stakes " 10 " S 29° W 3 1/2 " 96
 BW 2 Stakes " 10 " S 29° W 3 1/2 " 97
 BX 2 Stakes " 10 " S 29° W 3 1/2 " 98
 BY 2 Stakes " 10 " S 29° W 3 1/2 " 99
 BZ 2 Stakes " 10 " S 29° W 3 1/2 " 100

9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19

INGHAM COUNTY, MICHIGAN.

TOWN Three North, RANGE Two East, MERIDIAN OF MICHIGAN.

Survey of the North west fractional 4 section three Township
 No Three North of Range Number two East, Liberty, the foregoing
 survey establishing the boundary lines and corners of all that
 part and parcel of the said N.W. 1/4 sec. three lying South of
 the Cedar River. I find the N.W. 1/4 sec. first on west side
 of the section at Station B was extinct and I established it by meas-
 urement and correction of the random line run from the sec.
 corner of sections 9 & 10, 3 and 4 and running N 2° 10' 40" west
 160 rods to 4 section first and thence N 2° 40' west 74 rods to Cedar
 River where Station A is established. I then run the N & S
 4 section line N 3° and 10' west 160 rods to Station C and thence
 N 3° 10' W to Station D at Cedar River and prove the line by re-
 secting the north boundary line at the 4 section first. I
 then corrected the E & W section line from C to B 161 rods 5 lks
 and leaving them marked by stakes driven in and upon the
 line at every twenty rods distance. The Magnetic
 Variation being estimated at 15° of one degree East and set off by
 the corners of the corner first. Surveyed Jan 18th 1889 A.D.

C. B. Condit & Son
 J. R. Fairbanks & Chalmers.

Recorded Jan 22nd 1889

John M. Cream
 County Surveyor.

The corners E & F were located by measurements and
 division on November 7th 1889

The corner H. P. G. was located by me in a survey made on
 the 12th day of August A.D. 1887 the corner H. was identified
 by the U.S. Cherry trees and the old post found. Recorded
 November 9th 1889

#3


John M. Cream
 County Surveyor

SOURCE: Record of County Surveyor Vol. 3 P. 206 (1889)

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at Remuneration Office

206

T 3 N R 2 E Sec. 8
TOWN VILLAGE

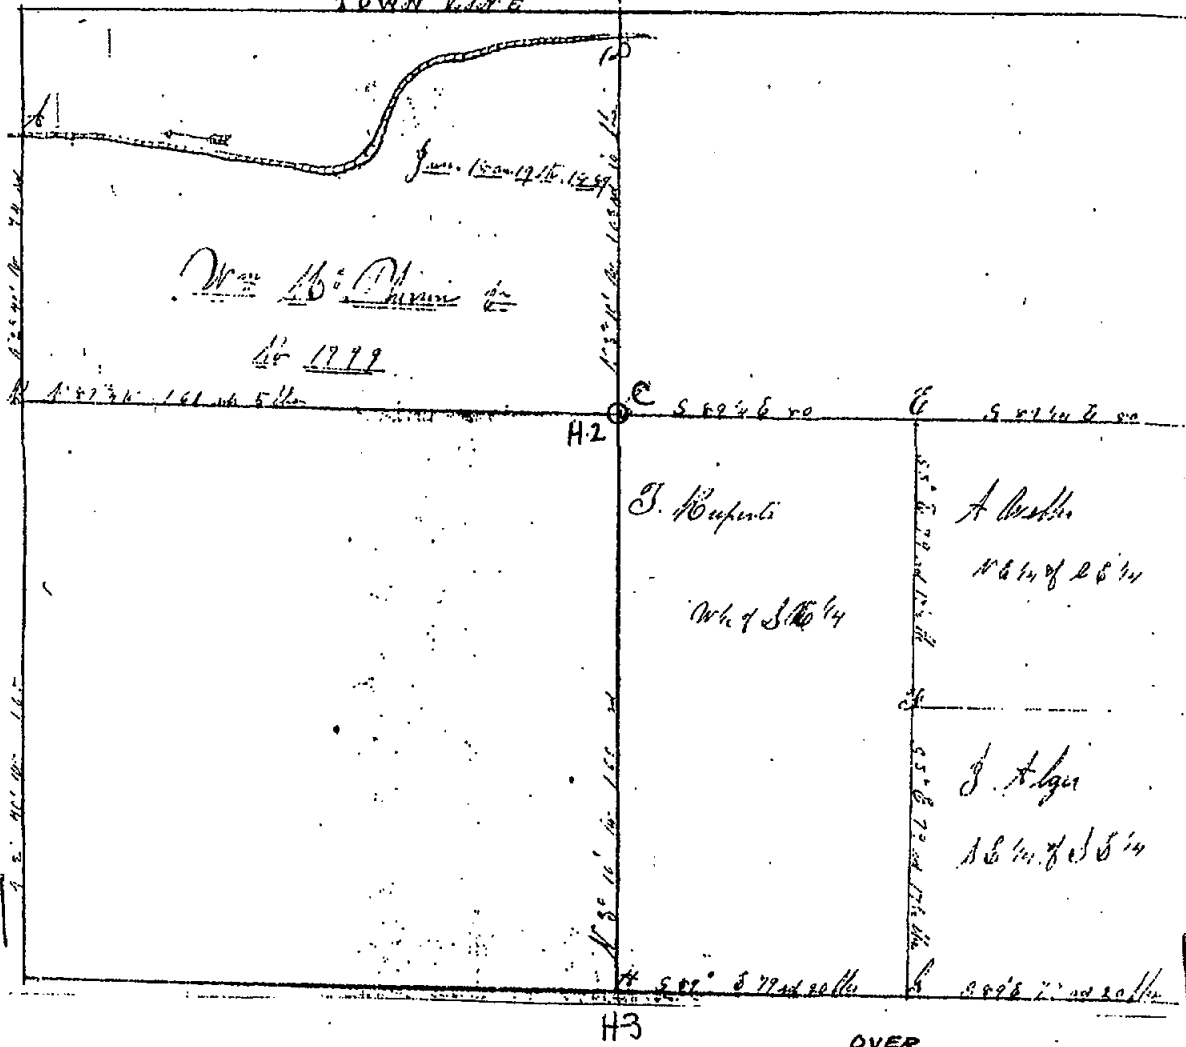

OVER

LEROY
township

T 3 N, R 2 E

H 2
corner code attachment no.

1
p. 1 of 1

Stake	Post	Width	Tree	Bearing	Dist	Stake	Post	Width	Tree	Bearing	Dist
6	Hand of Oak Stake	16	Bals 20 in	S 45 E	29	8	Fence post corner slab and nail				
			" " 7 "	due E	38	11	Fence post corner slab and nail				
13	Hand of Oak Stake	12	5 in								
16	Stone	Bush	6 in	S 30 W	6						
"	"	Stake	" " 6 "	N 55 W	52 1/2						
17	Hand of Oak Stake	10	10 "	S 65 W	32						
"	"	Stake	Red Elm 10 "	S 25 W	96 1/2						
18	Stake	10	5 in								
19	Post	"	"								

206

Survey of the N.W. 1/4 of Section 14 of Township 11 North Range 10 East, Long, the foregoing survey establishing the boundary line and corner of said 1/4 part and parcel of the said N.W. 1/4 of sec. 14 lying South of the Cedar River. I find the 1/4 section post on West side of the section at station B. was correct and I established it by measurement and correction of the random line run from the sec. corner of sections 7 & 11 and 3 & 4 and running N. 2° and 40' west 160 rods to 1/4 section post and thence N. 2° and West 74 rods to Cedar River where station A is established. I then run the N. and 1/4 section line N. 3° and 10' West 160 rods to station C. and thence N. 3° and 10' West to station D. at Cedar River and prove the line by intersecting the North Boundary line at 1/4 section post. I then corrected the C. and W. 1/4 sec line from C. to B. 161 rods 5 1/2 in and having them marked by stakes driven in and upon the corrected line at every twenty rods distance, the meander was being estimated at 15' of one day East and set off by the corner of the meander. Surveyed Jan 18th and 19th A.D. 1889.

C. B. Gault
 John H. Fairbanks, Chairman
 John W. Greary, County Surveyor
 Recorded Jan 22nd 1889

The corner C. & B. was located by measurement and division on November 7th 1887

The corner H & B was located by me in to survey made on the 12 day of August A.D. 1887 the corner H was identified by the W.D. Brown 1st and the old post found November 9th 1887

John W. Greary, County Surveyor


SOURCE: RECORD OF CO. SURVEYOR V. 3 P. 42
TRANSCRIBED from DELETED on file at REMON. OFFICE
DUPLICATE

12

T. 3 N. R. 2 E.

Section 2.

I-2

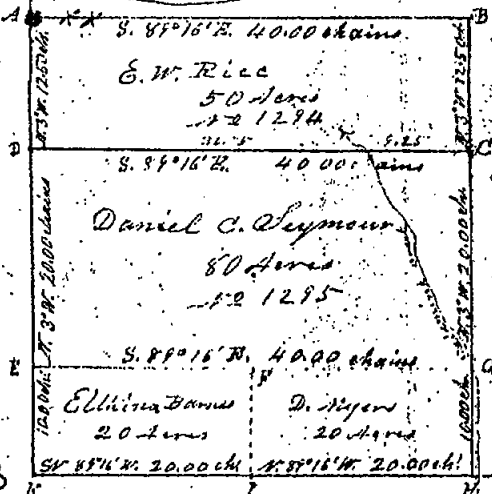

I-3

LEROY
township

T 3 N. R 2 E

I-2
corner code attachment no.

1
p. 1 of 2

VOL. 2, PG 69

42

Survey of the South-west Quarter of Section 2, Twp. 3 N., R. 2 E., of Range 4 N. 2nd East. The corner K being lost and the witness trees gone (See the accompanying Plat) the nearest known corner South was the Quarter Post in the East line of Section Ten, and the nearest known corner North was the North-west of the Section (Sec. 2) the Section Trees on this line were all gone. Therefore was a straight line between these two points which bears S. 81° 16' E. 93 1/2 chains. The nearest known corners East & West were the Quarter Posts in the South line of Sections Two & Three; therefore was the line between these two points which bears N. 81° 16' W. intersecting the West line of the Section (2) at (K) a distance of 46 1/2 chains of (H) the Quarter Post in the South line of said Section (2). Thus the corner K was established. Thence beginning at (K) the South-west corner of the Section, and running thence North Three degrees West on the West line of the Section Ten chains to (E) a Post from which gave a Range S. 81° 16' E. to be traced through to C by those concerned; thence from E North Three degrees West as before Twenty chains to (D) a Post; thence North Three degrees West as before Twelve chains to (B) a Post, also gave a Range from A, S. 81° 16' E. to be traced through to B (being near the River was not surveyed); thence from D, South Eighty-nine degrees and sixteen minutes East forty chains to (C) a Post from which a white Post ten inches diameter bears North fifty-seven degrees East eleven & one fourth links; thence North Three degrees West Twelve chains & fifty links to (B) a Post (No more); thence from C South Three degrees East Twenty chains to (A) a Post in the Calamint Creek (No witness trees); thence South Three degrees East as before Ten chains to (near H) a Post fifteen links West of the Quarter Post in the South line of Section Two as aforesaid; being the North-East side of our Elm stump 24 inches diameter & no other witness; thence North Eighty-nine degrees & sixteen minutes West on the said South line, Forty chains to (K) the place of beginning (containing 170 acres).


Run by the true Meridian Magnetic Variation. 2 1/4° D.

Surveyed for E. H. Rice, Daniel C. Seymour, O. Barnes & Co. Dec. 4th 1868 and recorded Dec. 31st 1868 by J. W. Brown Dep. C. Clerk Sup. Ct. Me.

COUNTY SURVEYOR'S RECORD,

TOWN *Shaw* NORTH, RANGE *Two* East, MERIDIAN OF MICHIGAN.

SEC. 10

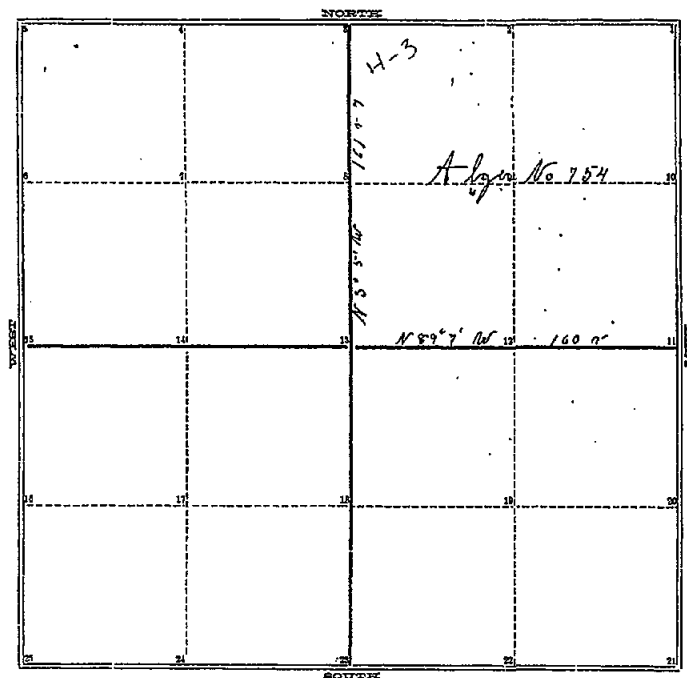

P. 2044-12

TOWN *Shaw* NORTH, RANGE *Two* East, MERIDIAN OF MICHIGAN.

Bush 20 S 14 1/2 E 14
 1 D 0 10 S 57 W 14

24

Bush 6 N 84 W 27
 3 D 0 12 S 7 1/2 E 11 1/2

25

4

5

6

7

8

9

10

Bush 4 S 51 E 4 1/2
 11 Bush 9 S 87 W 17

12

Bush 10 N 77 1/2 E 61
 13 Bush 10 S 71 W 5-4

14

15

16

17

18

19

20

21

INGHAM COUNTY, MICHIGAN.

359

TOWN *Lee* NORTH, RANGE *Two East*, MERIDIAN OF MICHIGAN.

Run by the true Meridian Per 2 3/4 E
Surveyed and Recorded June 12th 1864
By H. Jackson Co Surveyor

Poplar 10 in S 77 E 13 ft } Being true to the center of Section 11. T 3 N R 2 E
Do 12 in S 48 W 24 ft } for H. Donner

INGHAM COUNTY, MICHIGAN.

TOWN Thorn NORTH, RANGE 12 East, MERIDIAN OF MICHIGAN.

In Survey No. 1923 the entire section is surveyed and all the main corners set, but the object that brought about the survey was to ascertain the line between Wright and Drew running N.P.S. in the N.E. $\frac{1}{4}$ of the section which was determined by running the respective $\frac{1}{4}$ section lines and connecting them so as to establish the center by transverse lines between the respective $\frac{1}{4}$ section corners. Then the toll road strip lying north of the E.P.W. $\frac{1}{4}$ section line was located and Mr. Wright's 50 acres by his deed was taken out of the balance of the N.E. $\frac{1}{4}$ of the section and the west part of the W. $\frac{1}{2}$ of the S.E. $\frac{1}{4}$ was taken 25 50 acres and the rest except the small lots in the S.W. corner was divided equidistant between main corners.

A. V. Sullivan and D.C. Seymour shown claimant

Surveyed October 20th 21st 22nd 1890

John M. Crary
County Surveyor.

Roads to every

Roads - Town Hills. Road

Commencing at Section corner
280 m. E. of Hwy. 35 - East. and
turning East to Angle Road -
some m. and third gl. road.

Hall Road.

and out by 1849 - 1848
Beginning at S 1/4 part of Sec 25
S. 31/2 N. R. 2 E. Commencing at 21 1/2 10' W 31' 18' N
to 22 1/4 East of road Section 25, thence
to 30 1/2 11' N 160 Road to S 1/2 11' W 1/4 Sec 25
Section 24 - Run 3 E.
A. Jackson. County Survey.

Burgess Road

and out from 6th. 1848.

Big at 1/4 part of Section
24, 7 3/4 N. R. 2 E. Thence S 88 1/2 E
324 Road to Cornelia Line at the
East 1/4 part of Section 24. Run 3 E.

A. Jackson. C. Sec.

Survey of a highway commencing
20 1/4 Sec. East of 4th W 1/4 part of Sec
24, S 3 3/4 E. 110 ft. Run.

Thence 22 1/2 15' E. 168.35 also with
existing Grand River Road S. 1/2 W
1/4. Part 24 - S 90 W 16 1/2 E.

Surveyed May 10th 1849 by
James D. B. and Co. Survey

Survey of a highway commencing
at 5 1/4 part of Section
15 - S 3 3/4 E. R. 2 E. 110 ft. Run. 21 1/2 19' E
139 m. E. of Hwy. 35 - 139 m. E. of Hwy. 35 -
Road. Sec. 30 - S 25 W - 4 1/2 E.

Run by line 200 - 101 - 6 - 45 -

Surveyed May 10th. 1849 by
A. D. Jackson. C. Sec.

Turner Lane Road

Big on Turner Lane 3 1/4 E. of
North from 6 1/4 part of Sec 1. West
field 110 ft. Run.

Thence 16 - N 11 1/2 W 11 E
80 18 - S 31 E 27 E
Thence N 2 1/4 E 33.50 also to a stake
on the N side of Pleasant Road
Variation 31 E of N.

Surveyed 28th 1852

Daniel McNamee Sur.

Survey of a Road laid out
on 15 - 18 1/2 130 ft. on 1/2 Sec
at S 1/4 part of Section 34 1/2 3 1/2 N. R. 2 E.

Thence 20 1/2 11' W 32 1/2 N. 18 E. 26 1/4
Thence 1/2 Sec 34 - Thence 24 1/4 W
Sec 14 Sec 34 - 80.10 also to 21 1/4
part of Section 27 Thence 20 3/4 W
from 1/2 Sec 319 Road 23 E to 21 1/4
part of Sec 22. Run - 2 1/2 E.

Surveyed May 10th 1849 by
James D. B. and Co. Survey

Survey Townsfield Locks Road

Established July 11-1854.

Beginning at the corner of
land 99 Rods of 3 lines - starting by the
North west corner of section 19
1/2 mile S 3 1/2 N. 1/2 P 2 E, beginning
S 22 1/2 W 33 Rods - angle 90°
W. East-12 - N 68 W 150 ft. to the
thence S 30 E 1 mile 55 ft. to the
thence road - run 2 3/4 E -
N. Jackson Co Survey.
Survey July 11-1854

Locks Road

Beginning at North 1/4 part
of section 15 T. 3 N., R. 3 E., beginning
by S 3 3/4 W 321 Rods to lock to 2 1/2
1/4 mile of road, section 15, thence
N 30 W of 1/4 line 234 Rods to
plant on road. 191 - 2 3/4 E -
N. Jackson Co. Survey.
Survey July 11-1854

Locks Road

Beginning at section corner of
sec 19 x 30 1/4 survey. Thence N 24 E 100
also - (plant) S. W.
Thence N 6 W - S 48 E 23 E.
Thence N 6 W - S 30 E 1/2 mile to
thence N 50 - N 43 - 1/5 E.
Thence N 51 W - 6.04 also to section
corner.

Survey Townsfield

Survey of Sec 25 - 1855 - by
David Jackson
West 20 25' E -

Section 16

Section 1/4 part to Sec 1/4 part = 40.25 ft.

Locks Road

Beginning at section corner
of T. 3 N., R. 3 E., Sec 16
thence S 22 E 57.35 also on same
line - section
thence S 48 1/2 E - N 64 W 29 E.
thence S 48 1/2 E 6.50 also - Sec 16
thence S 10 E 7.80 also to section 16
thence N 10 - S 48 E 2 1/2 E.
thence S 24 1/2 W 10.03 also to the
the corner of Sec 19 and 30 in
the Townsfield Survey.
See Sec 25 E.

See - 16-1859 David Jackson Survey.

Also corner of section 10 to S 1/4
part survey to 40.21 also.


D. J. Brown.

SOURCE: RECORD OF CO. SURVEYOR V. 3 P. 206

TRANSCRIBED from 02-26-2002 on file at REMON. OFFICE
DUPLICATE

206

T 3 N R 2 E Section 8
TOWN LINE

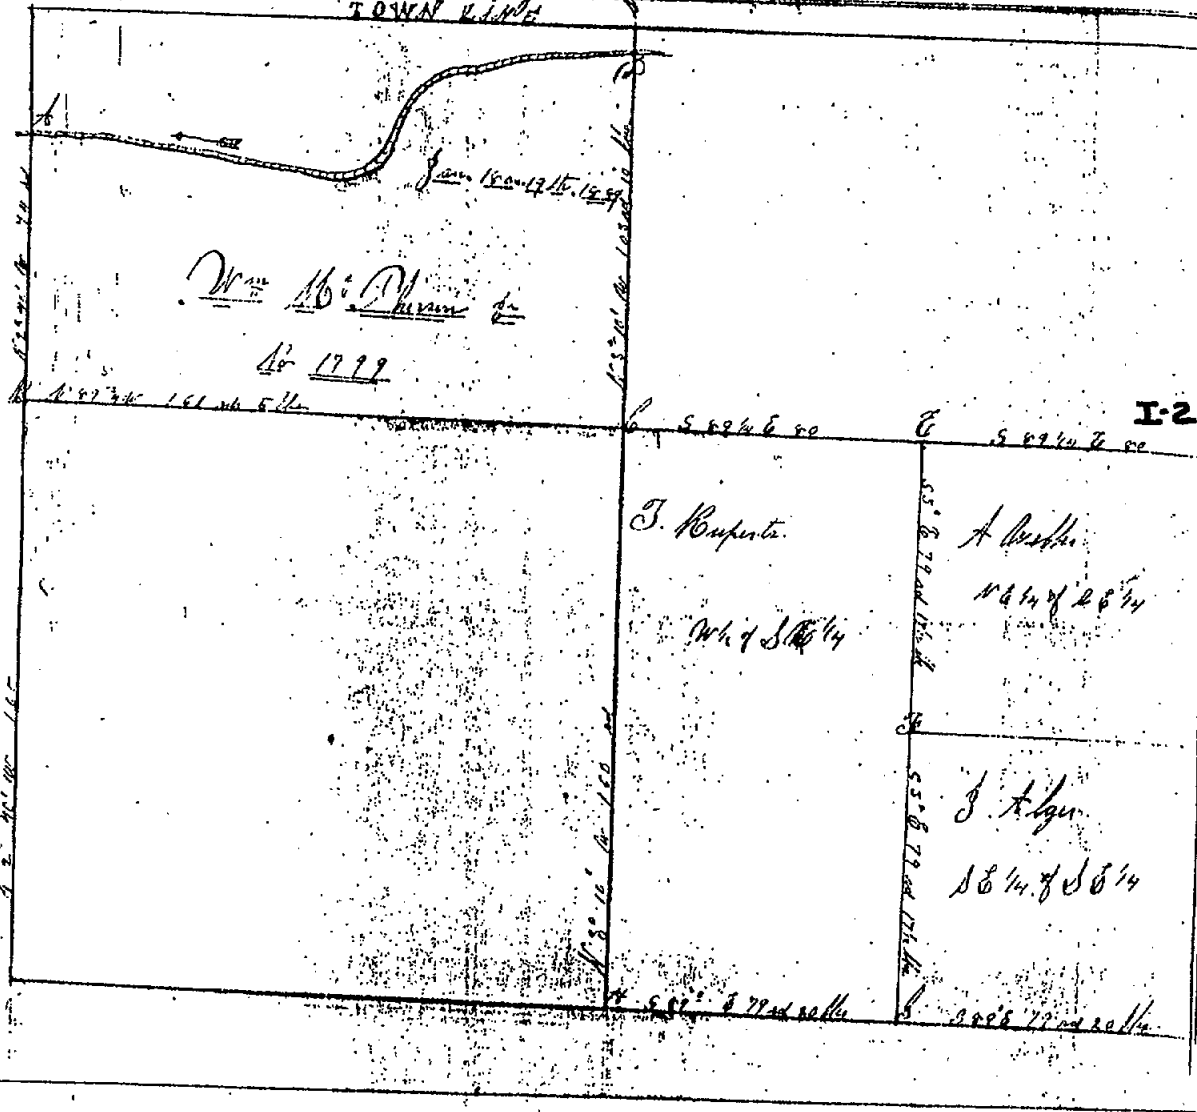

SOURCE: RECORD OF CO. SURVEYOR V. 3 P. 206

TRANSCRIBED from DUPLICATE on file at REMON. OFFICE

Section	Post	Distance	Bearing	Dist	Dist	Post	Distance	Bearing	Dist
1	Swampy Oak Stake	160 ft. 20 in	S 45 E	29	1	300 ft. corner stake and well from			
"	"	" " 7 "	due E	38	11	300 ft. corner stake and well from			
12	Wood stake	10 ft. near							
16	Stone stake	10 ft. near							
"	"	" " 8 "	N 53 W	52 1/2					
17	White Oak Stake	10 ft. near	S 68 W	32					
"	"	10 ft. near	S 28 W	96 1/2					
18	Stake	10 ft. near							
21	Post	"							

206