


COUNTY SURVEYOR'S RECORD,

TOWN Three North, RANGE 1st East, MERIDIAN OF MICHIGAN.

Section Two

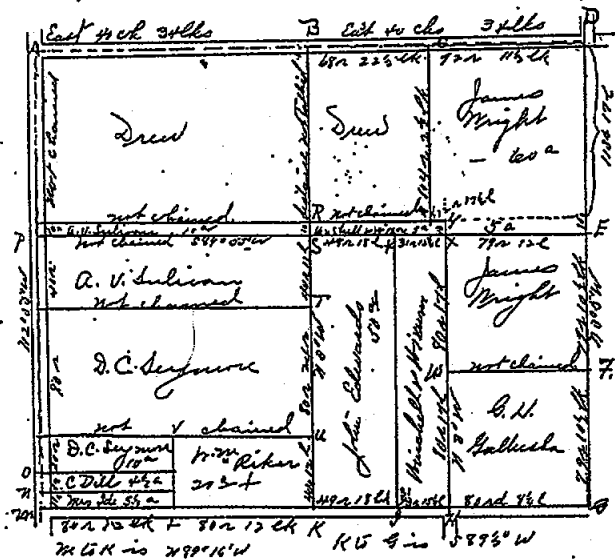


Page 228, Vol. 3

TOWN _____ NORTH, RANGE _____, MERIDIAN OF MICHIGAN.

- A x Stone No line
 B x Post W. Oak 12 $72^{\circ}58'W$ 15 1/2 ch 25 V. Post
 C x " " 14 $72^{\circ}58'W$ 15 1/2 ch 25 V. Post
 D x Stone & iron line 16 $77^{\circ}40'W$ 62 1/2
 E x " no line
 F x Post Red Oak 5 $77^{\circ}40'W$ 80
 G x Brick & Cherry 6 $77^{\circ}40'W$ 59
 H x R.R. line White Oak 4 $77^{\circ}40'W$ 41
 I x Stone & iron line 8 $77^{\circ}40'W$ 50
 K x D.P. x Gas pipe No line
 L x Post Sugar 8 $77^{\circ}40'W$ 119
 M x Gas pipe " 24 $77^{\circ}40'W$ 96
 N x Post Maple 4 $77^{\circ}40'W$ 74
 O x Post No line
 P x Gas pipe No line
 Q x Iron post Sugar 16 $81^{\circ}20'W$ 128 1/2
 R x Iron pin center post of Bridge on east side of Bridge is 1/2 mile W. 1/2 mile S. of corner
 18 in center of Road
 S x Gas pipe " 18 $82^{\circ}40'W$ 66
 T x Gas pipe " 16 $82^{\circ}40'W$ 112
 U x Stone & iron line 10 $77^{\circ}40'W$ 50 1/2
 V x Post " Oak 3 $81^{\circ}20'W$ 11 1/2
 W x Post " Oak 14 $81^{\circ}20'W$ 11 1/2
- 22
 23

COUNTY SURVEYOR'S RECORD,

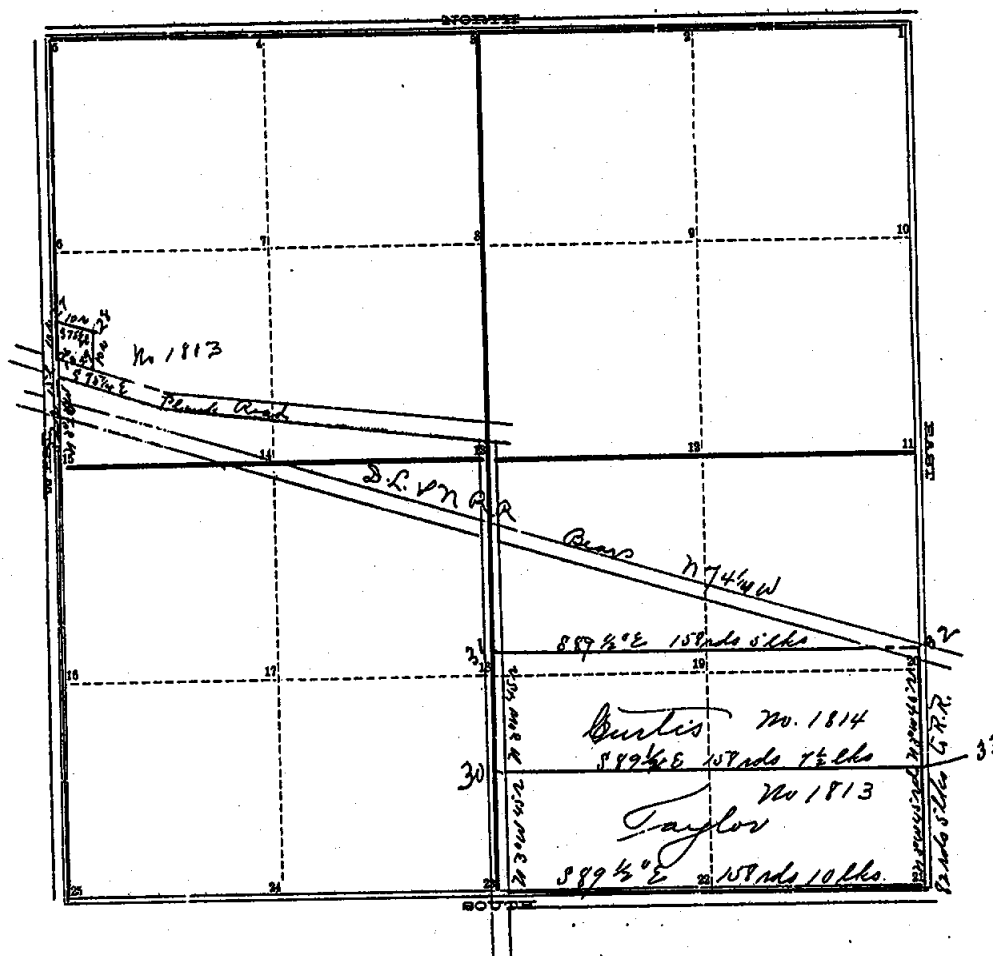TOWN Three NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.SEC. 11TOWN Three NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

- | | |
|----|--|
| 1 | 24 |
| 2 | 25 |
| 3 | 26 Iron pin. Clin 24 N 68° E 6 1/2 |
| 4 | 27 Drag tooth N.W. cor of same trees 334 E 82 |
| 5 | 28 Brick Tame Cherry 3 S 72° W 20 |
| 6 | 29 Oak Iron Cherry 6 S 23 1/4° E 65 |
| 7 | 29 pulley journal Beech 18 S 84 1/2° E 789 |
| 8 | 30 Gas pipe Butternut 18 N 44° 58' E 73 |
| 9 | 31 Iron to Cherry 12 N 10° 58' E 120 |
| 10 | 31 Brick N.W. 18 S 7° W 225 |
| 11 | 32 Gas pipe No tree corner is 23 1/2 lks and 8 R.R. right of |
| 12 | 33 " " No trees |
| 13 | 2 |
| 14 | |
| 15 | |
| 16 | |
| 17 | |
| 18 | |
| 19 | |
| 20 | |
| 21 | Gas pipe No trees |
| 22 | |
| 23 | R.R. Iron N.W. 16 N 47 1/4° E 29 1/2 |

INGHAM COUNTY, MICHIGAN.

227

TOWN Two North, RANGE Two East—, MERIDIAN OF MICHIGAN.

Number 1803 the survey of 100 rods of land in the N.W. 1/4 of Section No 11 of T3 N R 2 E. Survey beginning at a point on the section line between section (10) and (11) 32 rods N lks N by 3° 20' W from the quarter sec post on said section line and running thence N 3° 20' W 10 rods; thence S 75 1/4° E 11 rods; thence S 3° 21' E 10 rods; to East Center of Howell Lumbering plank Road now known as the Gravel Road; thence N 75 1/4° W along the center of said road to the place of beginning where the section line crosses the center of said gravel road. The above described premises being the property of Peter S. Graham at the time of date of this survey.

Run by the true Meridian, Mar 19th 1889 Mag. Var established at 15° East

Recorded Mar 22nd 1889 Charles Chandler and Cluster Barber Sworn Chairmen


John M. Cream,
Co. Surveyor.

In survey No 1813 & 1814 the south 90 rods in width is divided and each parcel given 45 rods North & South and iron corner set. The lines (31) to (32) and (32) to (33) were run by the compass and corrected back stakes being driven every 40 rods. The corner (32) is on the section line between secs. 11 & 12 and 23 1/2 lks North of the R.R. right of way

May 16th 1890 John M. Cream Co. Surveyor.

SOURCE: FOLDER #2 P.14

TRANSCRIBED from ~~REDACTED~~ on file at REMON. OFFICE

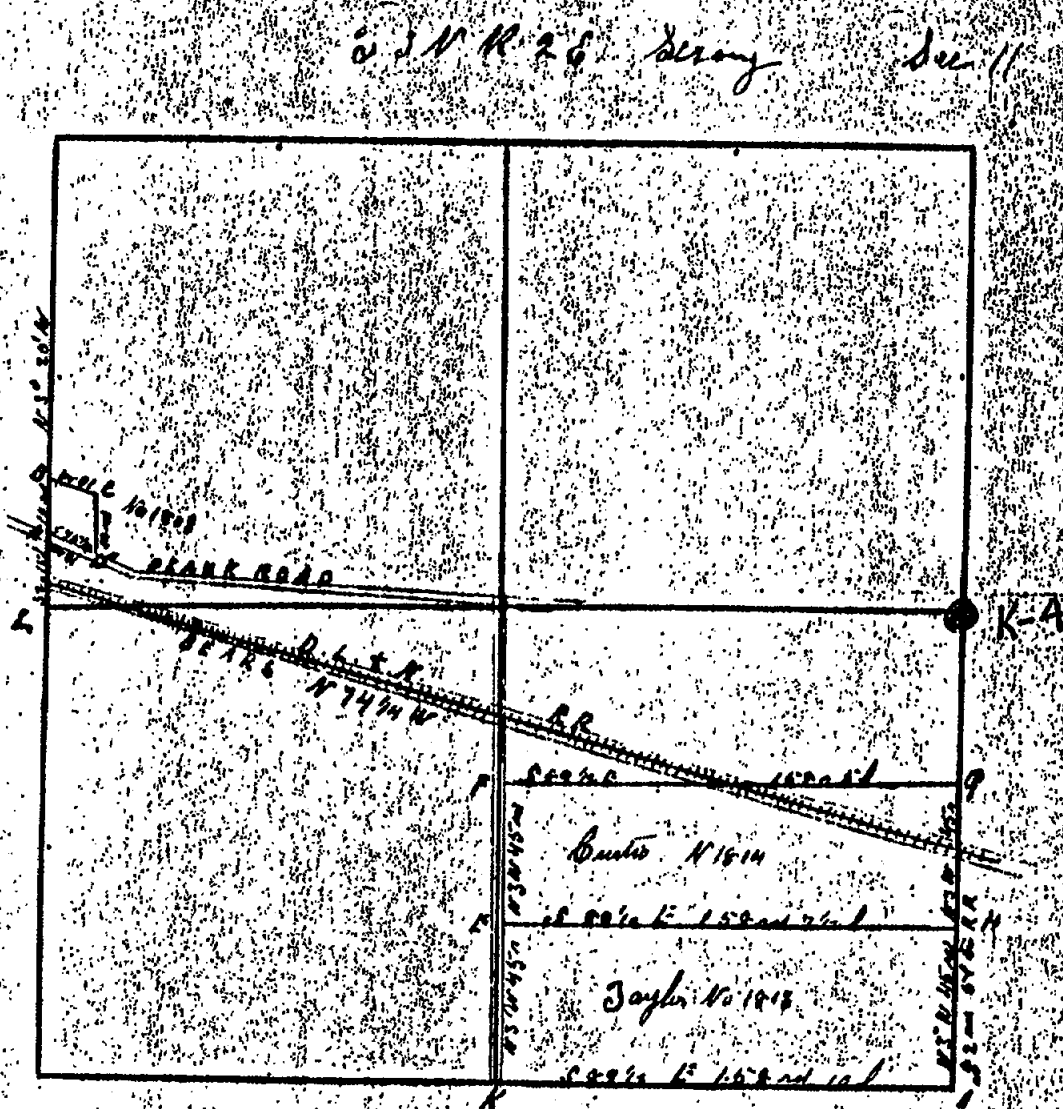

LEROY
township

T 3 N, R 2 EW

K-4 14
corner code attachment no.

p. 1 of 2

SOURCE: FOLDER #2 P. 14

TRANSCRIBED from RECORDS on file at REMON. OFFICE
 DUPLICATE

Station	Corner	Timber	Bearing	Links	Station	Corner	Timber	Bearing	Links
A	One Pin	elm 25	N 68° W	55	G	hops pipe	Ashtenut 15	N 44° E 1/2	78
B	One Pin	elm 25	S 24° E	52	H	hops pipe	elm 15	N 44° E 1/2	78
C	One Pin	elm 25	S 72° W	50	I	hops pipe	elm 15	S 72° W	50
D	One Pin	elm 25	S 72° W	50	J	hops pipe	elm 15	S 72° W	50
E	One Pin	elm 25	S 72° W	50	K	hops pipe	elm 15	S 72° W	50
The above corner in the 10/10 plot					The above corner in the SE 1/4 of SE 1/4				
in the N.W. 1/4 established March 10th					was established May 16th 1890				
1889					1889				
L	One Pin	elm 25	N 72° W	36					
M	One Pin	elm 25	N 72° W	36					

John M. G. Henry County Surveyor

Var. 15 min. S

Liber 5 Page 2 of 2

14


LEROY
township

T 3 N. R 2 E

K-4
corner code attachment no.

14
p. 2 of 2

TRANSCRIBED from ~~RECORDED~~ on file at REMON. OFFICE

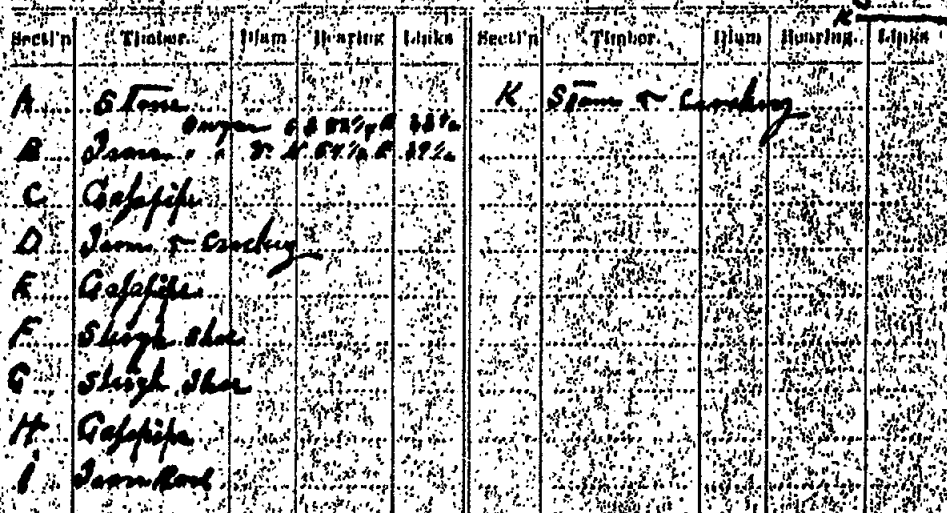

Surveyed the 25-27 days of Nov. 1905 by


John M. Brown
County Surveyor of Indian County, Michigan

SOURCE: FOLDER #1 P. 18

TRANSCRIBED from ORIGINAL on file at REMON. OFFICE

Town 3 N. Range 2 E

Section No. 11

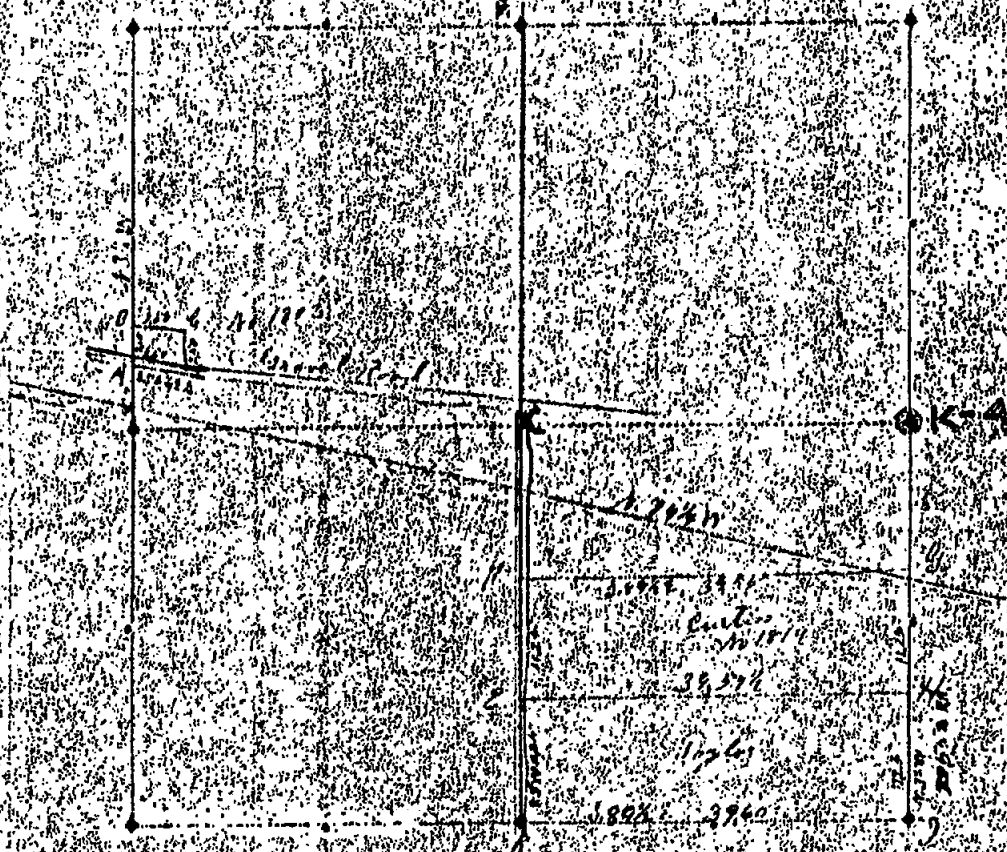


SOURCE: FOLDER #2 P.15

TRANSCRIBED from REMAN. OFFICE on file at REMAN. OFFICE

Town 3 N, Range 2 E

Section No. 12

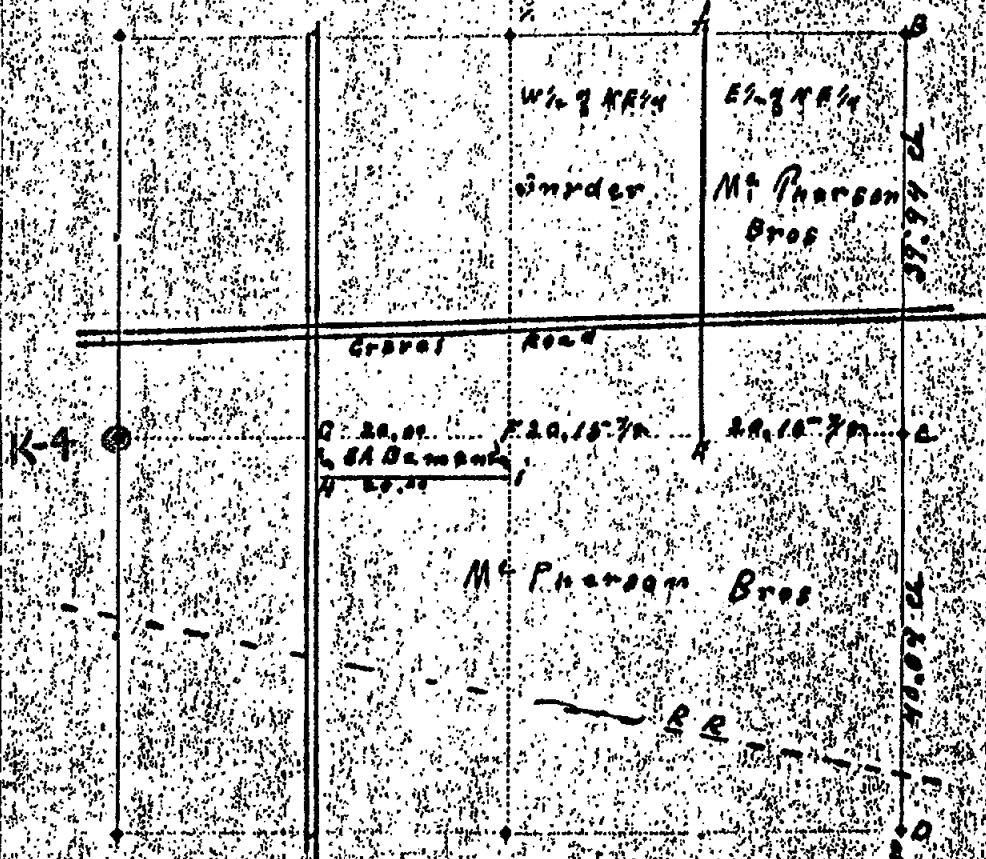

Section	Timber	Plum	Hawthorn	Maple	Section	Timber	Plum	Hawthorn	Maple
A	6 Trees				K	Stem & Crotch			
B	Same								
C	Grass								
D	Same & Crotch								
E	Grass								
F	Shrub								
G	Shrub								
H	Grass								
I	Same								

Run by the true meridian Magnetic variation 0 degrees 15 minutes 0

Surveyed the 25 & 27 days of May 1908 by

John M. Leroy

County Surveyor of Ingham County, Michigan

15

LEROY
township

T 3 N, R 2 E

K-4
corner code


15
attachment no.

P. 1 of 1

SOURCE: RECORD OF CO. SURVEYOR V. 3 P. 210

TRANSCRIBED from ORIGINAL on file at REMON. OFFICE
DUPLICATE

210

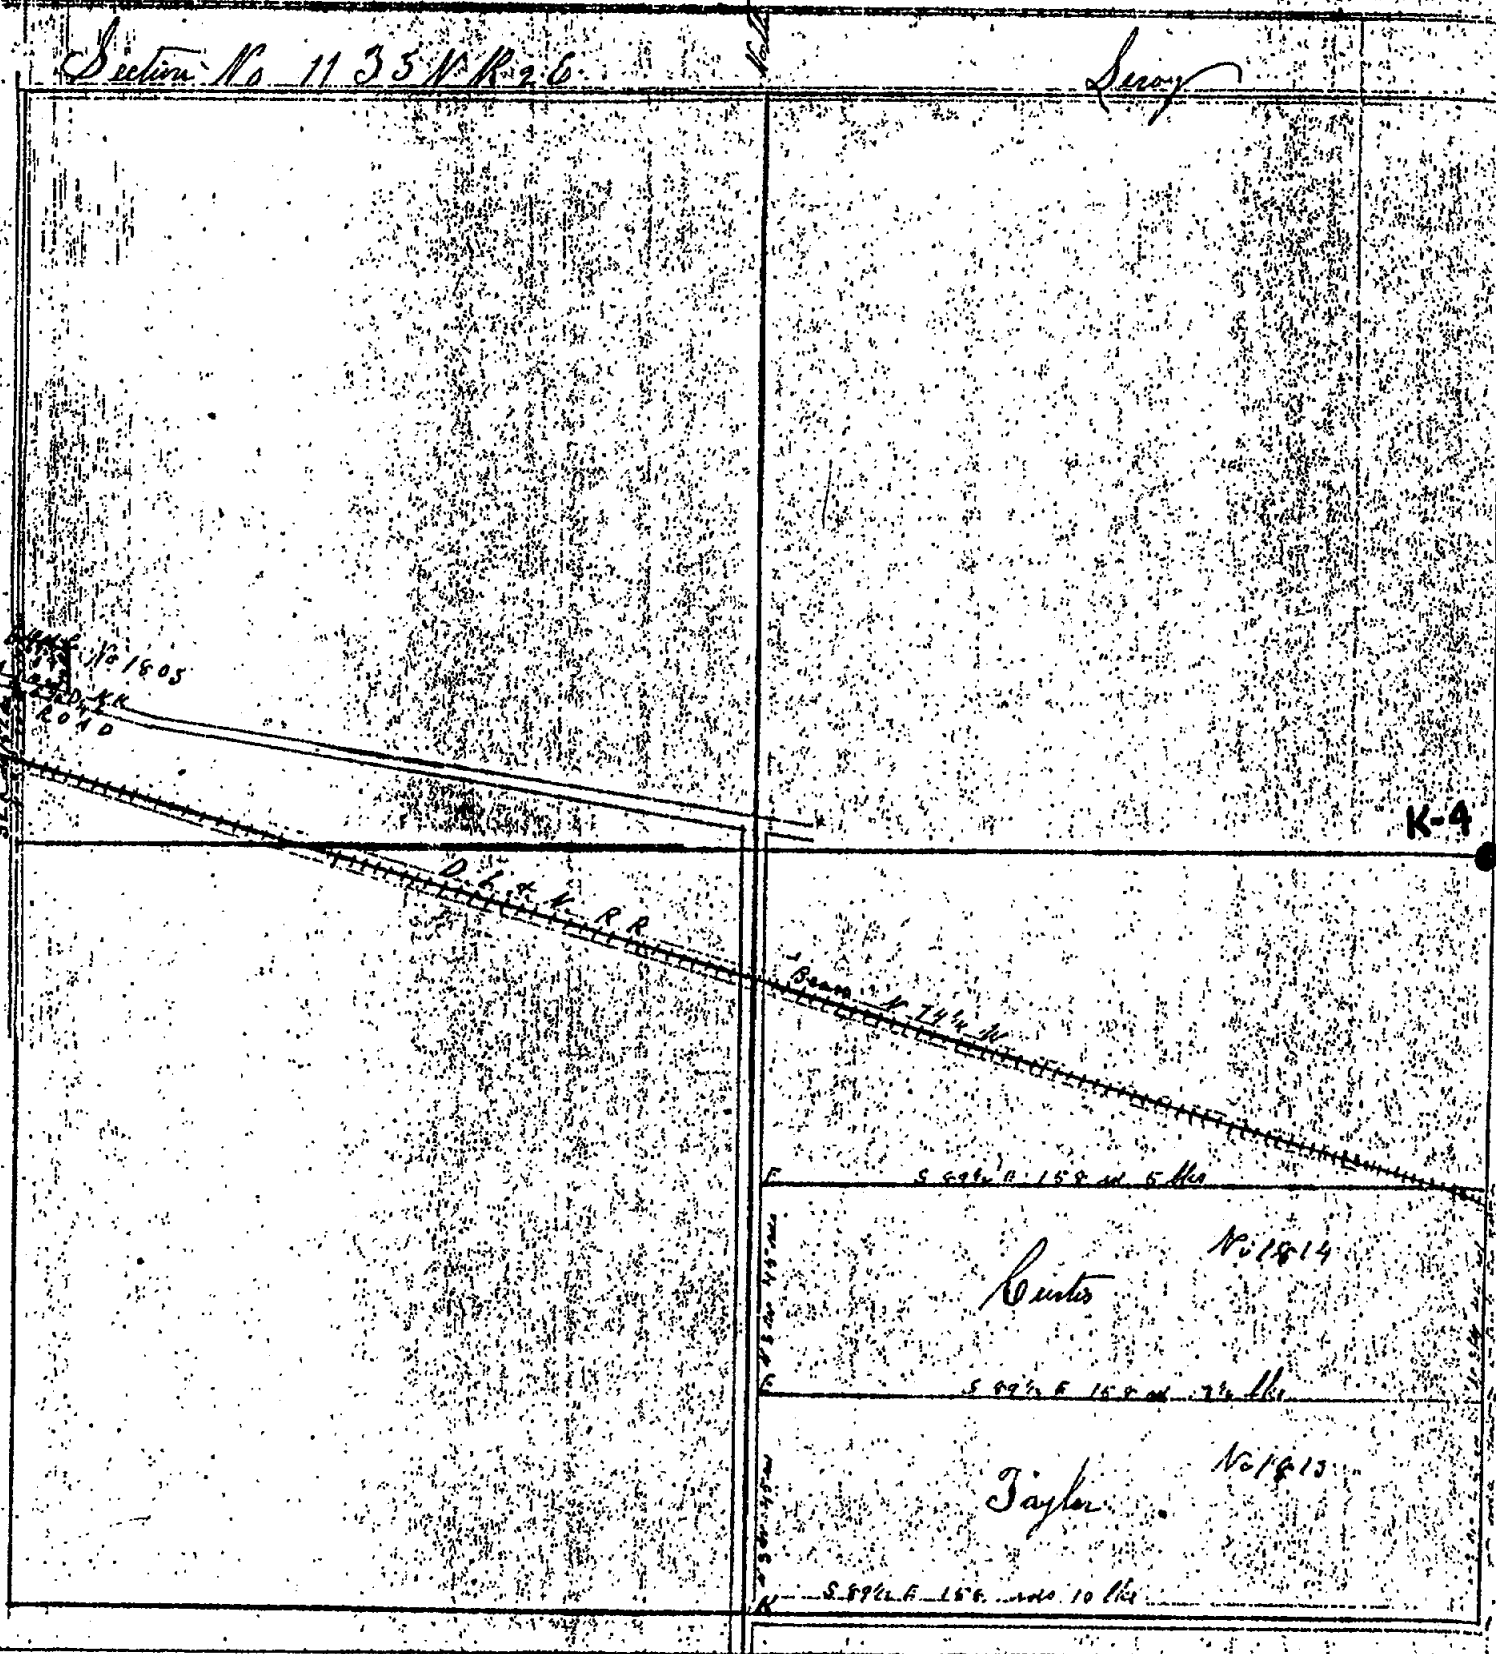

LEROY
township

T 3 N. R 2 EW

K-4
corner code

8
attachment no.

p. 1 of 2

SOURCE: RECORD OF CO. SURVEYOR V. 3 P. 210TRANSCRIBED from ORIGINAL on file at REMON. OFFICE

Corner	Witness	Dist	Bearings	Link	Corner	Witness	Dist	Bearings	Link
to Section line	W. Lee	24 in	N 68° E	66	K. R. Lee	W. O.	16	N 4 1/4° E	221
B. Dog Tooth	Barn. Lee		S 34° E	82					
C. Brick	Barn. Lee	3 in	S 72° W	30					
D. Cat Run	Lee	6 in	S 22 1/4° E	65					
E. Full & Journal	Brick	18 in	S 64 1/4° E	189					
F. Safe pipe	Butternut	18	N 44° 50' E	73					
G. 3. 3. 3.	cherry	14	N 10° 65' E	130					
H. 3. 3. 3.	W. O.	18	S 7° W	225					
I. Safe pipe	no tree	corner is	23 1/2 N 1/2 of R. R. right of way						
J. Safe pipe	No tree								
K. Safe pipe	No tree								

210

Number 1805 is the survey of one hundred rods of land in the N. W. 1/4 of Sec No. 11 of T. 35 N. R. 26. Survey beginning at a point on the sec line between Secs 10 & 11 32 rods 15 N. by S 2° 20' W from the go sec post on said sec line and running thence N 5° 20' W ten rods thence S 75° 1/2° E ten rods thence S 5° 20' E ten rods to center of Howel and Lansing plank road now known as the gravel road thence N 75 1/2° W along the center of said road to place of beginning where the section line crosses the center of said gravel road the above described premises being the property of Porter L. Graham at the time and date of this survey

Run by the true meridian March 19th 1889 the magnetic
var estimated at 15° East

Recorded March 22nd 1889

Charles Chamber & Chester Barber sworn Chasmen

John M. Greary County Surveyor J. Graham Sec. 11

In surveys No. 1815 and 1814 the south 70 rods in width is divided and each parcel given 46 rods north and south and iron corners set the lines I to B and C to H were run by the compass and surveyed back station being driven every 40 rods the corner bis on the section line between Secs 11 & 12 and 23 1/2 N. 1/2 of the R. R. right of way May 16th 1890 John M. Greary County Surveyor

LEROY
township

T 3 N, R 2 EW

K-9
corner code attachment no.

p. 2 of 2

SOURCE: RECORD OF CO. SURVEYOR V. 3 P. 210TRANSCRIBED from DUPLICATE on file at REMON. OFFICE

Crosser	Width	Dist	Bearings	Link	Crosser	Width	Dist	Bearings	Link
to corner	8 feet	24 in	N 68° E	66	K R.H. corner	140	16	N 4 3/4° E	221
B. Dog Tooth	Bearings		S 34° E	82					
C. Brick	Bearings	3 in	S 7 1/2° W	30					
D. lat iron	cherry	6 in	S 22 3/4° E	65					
Fully & joined	Brick	18 in	S 84 3/4° E	189					
E. sap pipe	Butternut	18	N 44° 50' E	73					
F. gum	cherry	14	N 10° 55' E	130					
G. brick	W.O.	18	S 7° W	225					
H. sap pipe	no tree	corner is	23 1/2 N 1/2 of R.R. right of way						
I. sap pipe	No tree								
J. sap pipe	No tree								

210

Number 1805 is the survey of one hundred rods of land in the N.W. 1/4 of Sec No. 11 of T3N R2E. Survey beginning at a point on the sec line between Secs 10 & 11 32 rods 15 N. by S 20° W from the op sec post on said sec line and running thence N 5° 20' W ten rods thence S 75° 1/4° E ten rods thence S 5° 20' E ten rods to center of Howel and Lansing plank road now known as the gravel road thence N 75 1/4° W along the center of said road to place of beginning where the section line crosses the center of said gravel road the above described premises being the property of Porter L. Graham at the time and date of this survey.

Run by the true meridian March 19th 1889 the magnetic
var. Estimated at 15° East.

Recorded March 22nd 1889

Charles Chambers & Chester Barber sworn chainmen

John M. Greary County Surveyor Japhan Co. Clerk

In surveys No. 1813 and 1814 the south 70 rods in width is divided and each parcel given 46 rods north and south and iron corners set the lines E to B and C to H were run by the compass and directed back station being driven say 40 rods. The corner lies on the section line between Secs 11 & 12 and 23 1/2 N. 1/2 of the R.R. right of way. May 16th 1890 John M. Greary County Surveyor

LEROY
township

T 3 N, R 2 EW

K-9
corner code attachment no.

p. 2 of 2

TRANSCRIBED from ~~RECORD~~ on file at REMON. OFFICE

Township: Leroy
Section: 11

1 - see Sec. 1 K-3 UNRECORDED

D - stone N side tel. pole K-4 UNRECORDED

2 - see Sec. 2 I-4 RECORDED

E - iron shaft

ash 15" ENE 65.0

elm 2" N 14.5

iron road sign SW 2.1

ash 6" SE 95.2

ash 8" SW 87.1

C - 1" iron pipe gear shaft on top

butternut 10" SE 48.0

butternut 12" ESE 67.5

SW cor. barn NE 76.7

Ash 14" SSE 139.2

iron road sign WNW 16.0

J-5 RECORDED

4 - gas pipe - crockery - about 1' W of fence line N

1" pipe N 33.0

Maple 15" S 22.5

oak 20 SSW 24.5

maple 12" SW 30.5

maple 12" WSW 43.0

K-5 RECORDED

SOURCE: RECORD OF CO. SURVEYOR V. 3 P. 42

TRANSCRIBED from DEPT. OF AGRICULTURE on file at REMON. OFFICE


12

T. 3 N. R. 2 E.

Section 2.

Cedar River

I-2

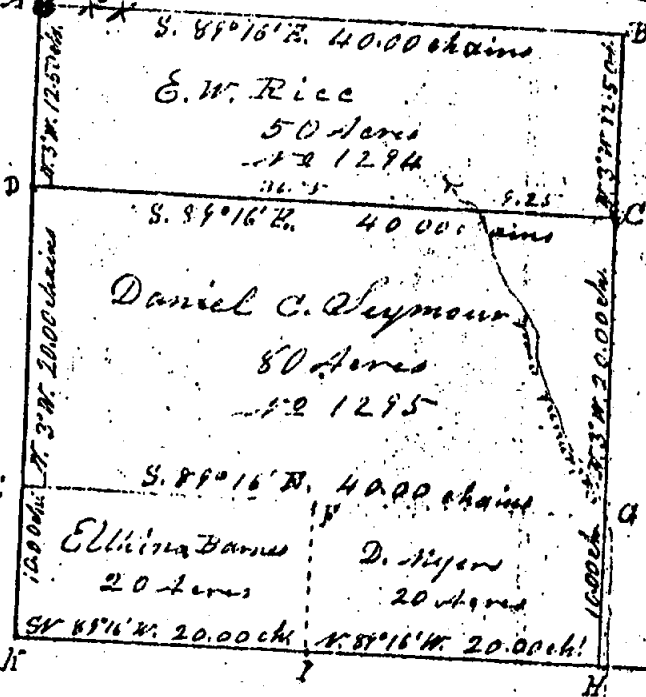

I-3

LEROY
township

T. 3 N. R. 2 E.

I-2
corner code attachment no.


P. 1 of 2

Survey of the Southwest Quarter of Section 2 & 10 in Township 34 North, of Range 12 East. The corner K being lost and the witness trees gone, (See the accompanying Plat) the nearest known corner South was the Quarter Post in the East line of Section Ten, and the nearest known corner North was the North West of the Section (Sec. 2) The station trees on this line were all gone. Therefore ran a straight line between these two points which bears S. 89° 16' 16" E. 34 chains. The nearest known corners East & West were the Quarter Posts in the South line of Sections Two & Three; therefore ran the line between these two points which bears N. 89° 16' 16" E. intersecting the West line of the Section (2) at (K) a distance of 40 chains of (14) the Quarter Post in the South line of said Section (2). Thus the corner K was established. Thence beginning at (K) the Southwest corner of the Section, and running thence North three degrees West on the West line of the Section Ten chains to (E) a Post from which gave a Range S. 89° 16' E. to be traced through to (C) by those concerned; thence from E North three degrees West as before Twenty chains to (D) a Post; thence North three degrees West as before Twelve chains & fifty links to (A) a Post, also gave a Range from A, S. 89° 16' E. to be traced through to B, (being near the River was not surveyed.) Thence from D, South Eighty-nine degrees and sixteen minutes East, forty chains to (C) a Post, from which a white Oak ten inches diameter bears North fifty-seven degrees East eleven & one fourth links; thence North three degrees West Twelve chains & fifty links to (B) a Post (No more) thence from A South three degrees East Twenty chains to (F) a Post in the Calamint Creek (No witness trees). Thence South three degrees East as before Ten chains to (near H) a Post sixteen links West of the Quarter Post in the South line of Section Two aforesaid; being the North-East side of an Elm stump 24 inches diameter & No other witness, thence North Eighty-nine degrees & sixteen minutes West on the said South line, Forty chains to (K) the place of beginning (Containing 170 Acres.

Run by the true Meridian Magnetic Variation. $2\frac{1}{4}^{\circ}$ D.

Surveyed for E. H. Rice, Daniel C. Seymour, C. Barnes & Co. Dec. 4th 1868 and Recorded Dec. 31st 1868 by J. W. Brown Dep. Co. Sheriff. Co. Math.

COUNTY SURVEYOR'S RECORD

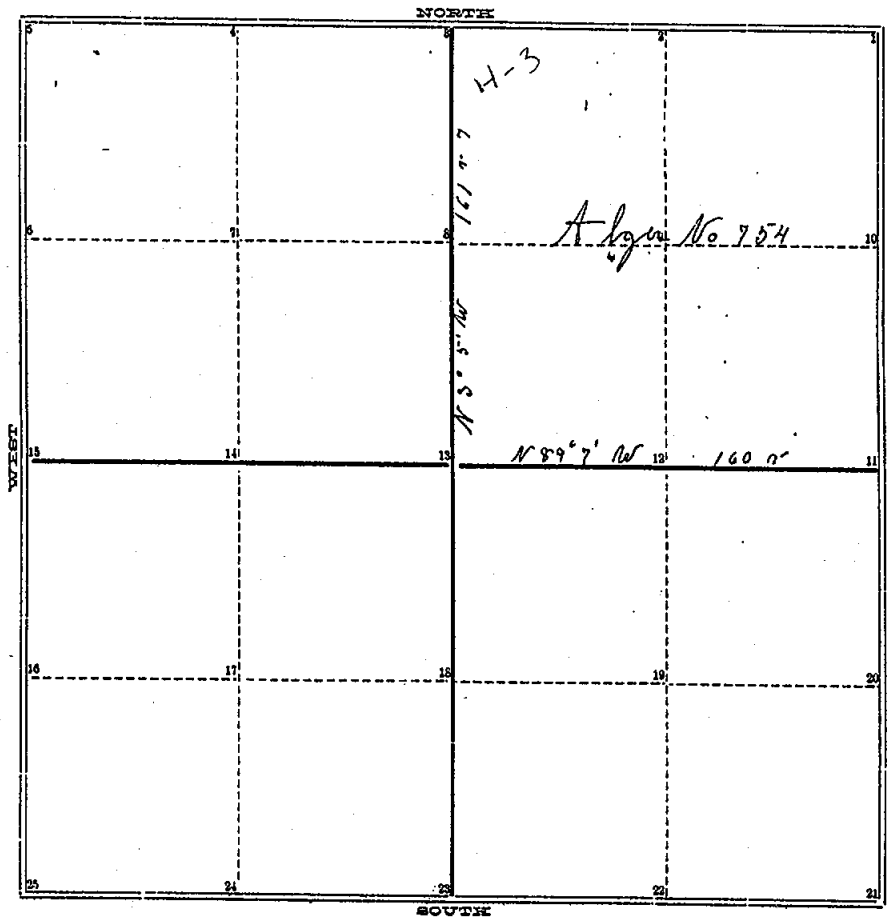TOWN *Shaw* NORTH, RANGE *Two* East, MERIDIAN OF MICHIGAN.SEC. *10*

P 204 and 2

TOWN *Shaw* NORTH, RANGE *Two* East, MERIDIAN OF MICHIGAN.

Bush 20 S 14 1/2 E 16
 1 P 0 10 S 57 W 14

24

2 Bush 6 N 84 W 27

25

3 P 0 12 S 7 1/2 E 11 1/2

4

5

6

7

8

9

10 Bush 4 S 51 E 4 1/2

11 Bush 9 S 87 W 17

12 Bush 10 N 77 1/2 E 61

13 Bush 10 S 77 W 5-4

14

15

16

17

18

19

20

21

INGHAM COUNTY, MICHIGAN.


359

TOWN Lee NORTH, RANGE Seven East, MERIDIAN OF MICHIGAN.

Run by the true Meridian Nov 23rd 63
Surveyed and Recorded June 12th 1864
By A Jackson Co Surveyor

Poplar 10 in S 77 E 13 lks } Being true to the center of Section 11. 33 N R 2 E
Do 12 in S 48 W 24 lks } for H. Donner

COUNTY SURVEYOR'S RECORD,

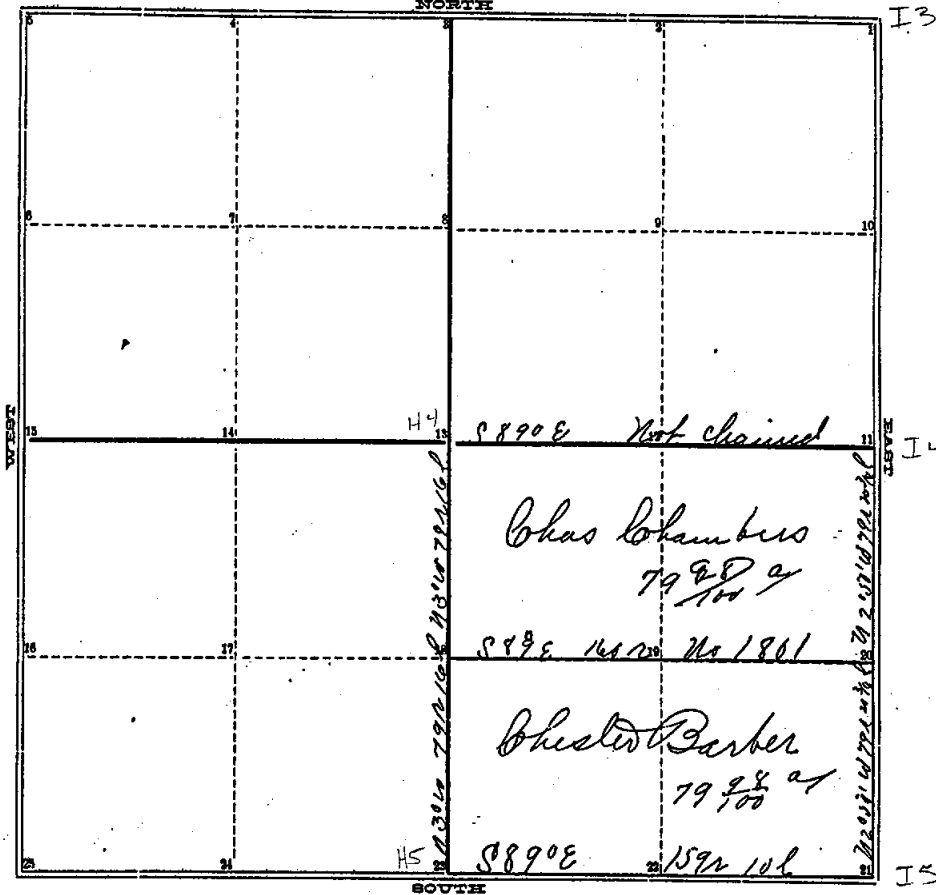TOWN *Three* NORTH, RANGE *Two East*, MERIDIAN OF MICHIGAN.SEC. *10*H3
NORTH

TOWN _____ NORTH, RANGE _____, MERIDIAN OF MICHIGAN.

1 24

2 25

3

4

5

6

7

8

9

10 Title Street Sugar 2 S 87 3/4 W 37 } These lines are the 5th to
 11 1/2 Tract Sugar 2 S 84 1/4 W 49 1/2 } 16th from the R.R. South.

12 Title Abbeysmiths 12 S 81 1/2 W 120

13 Title R. H. 7 N 27 1/2 W 114 1/2

14

15

16

17

18 Title N.E. Cor. of Gravel 393 W 115 1/4

19

20 Title Elm 2 N 59 1/2 W 204

21 Gas pipe Sugar No. 18 S 53 1/2 E 26

22 Title Sugar No. 20 N 28 1/2 E 148 1/2

23 " Elm 20 N 80 W 118

Vol. (2) P. (225)

INGHAM COUNTY, MICHIGAN.

225

TOWN Three NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

Survey of S.E. Quarter of Sec 10 in T3N R2E. The survey shown in the plat given the distance and length of the lines chained and the bearings of the E & W quarter section line which was not chain but was run by compass to ascertain where the corrected line crossed the N & S quarter section line and the center was established at (13) and a tile corner planted and witnessed as represented in the descriptions at (13). As far as I can learn there were never any corner established at the point (13). The corner (23) was planted by Louis D. Preston while the witnesses stumps of the U. S. Survey were in existence. The corner (11) was established by him while the U. S. witnesses existed. U. S. Witness stump existed at (21) making a survey to my mind beyond any reasonable question of wrong or deficiency.

Surveyed by the true Meridian Var 15° East.

Mar 19th 1889

Peter S. Graham and Levi Alchin

Survey Chain run

John M. Cressy

Recorded, Mar. 22nd 1889.

Co. Surveyors.