


SOURCE: Folder Set #2

p. 33

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at Remuneration Office

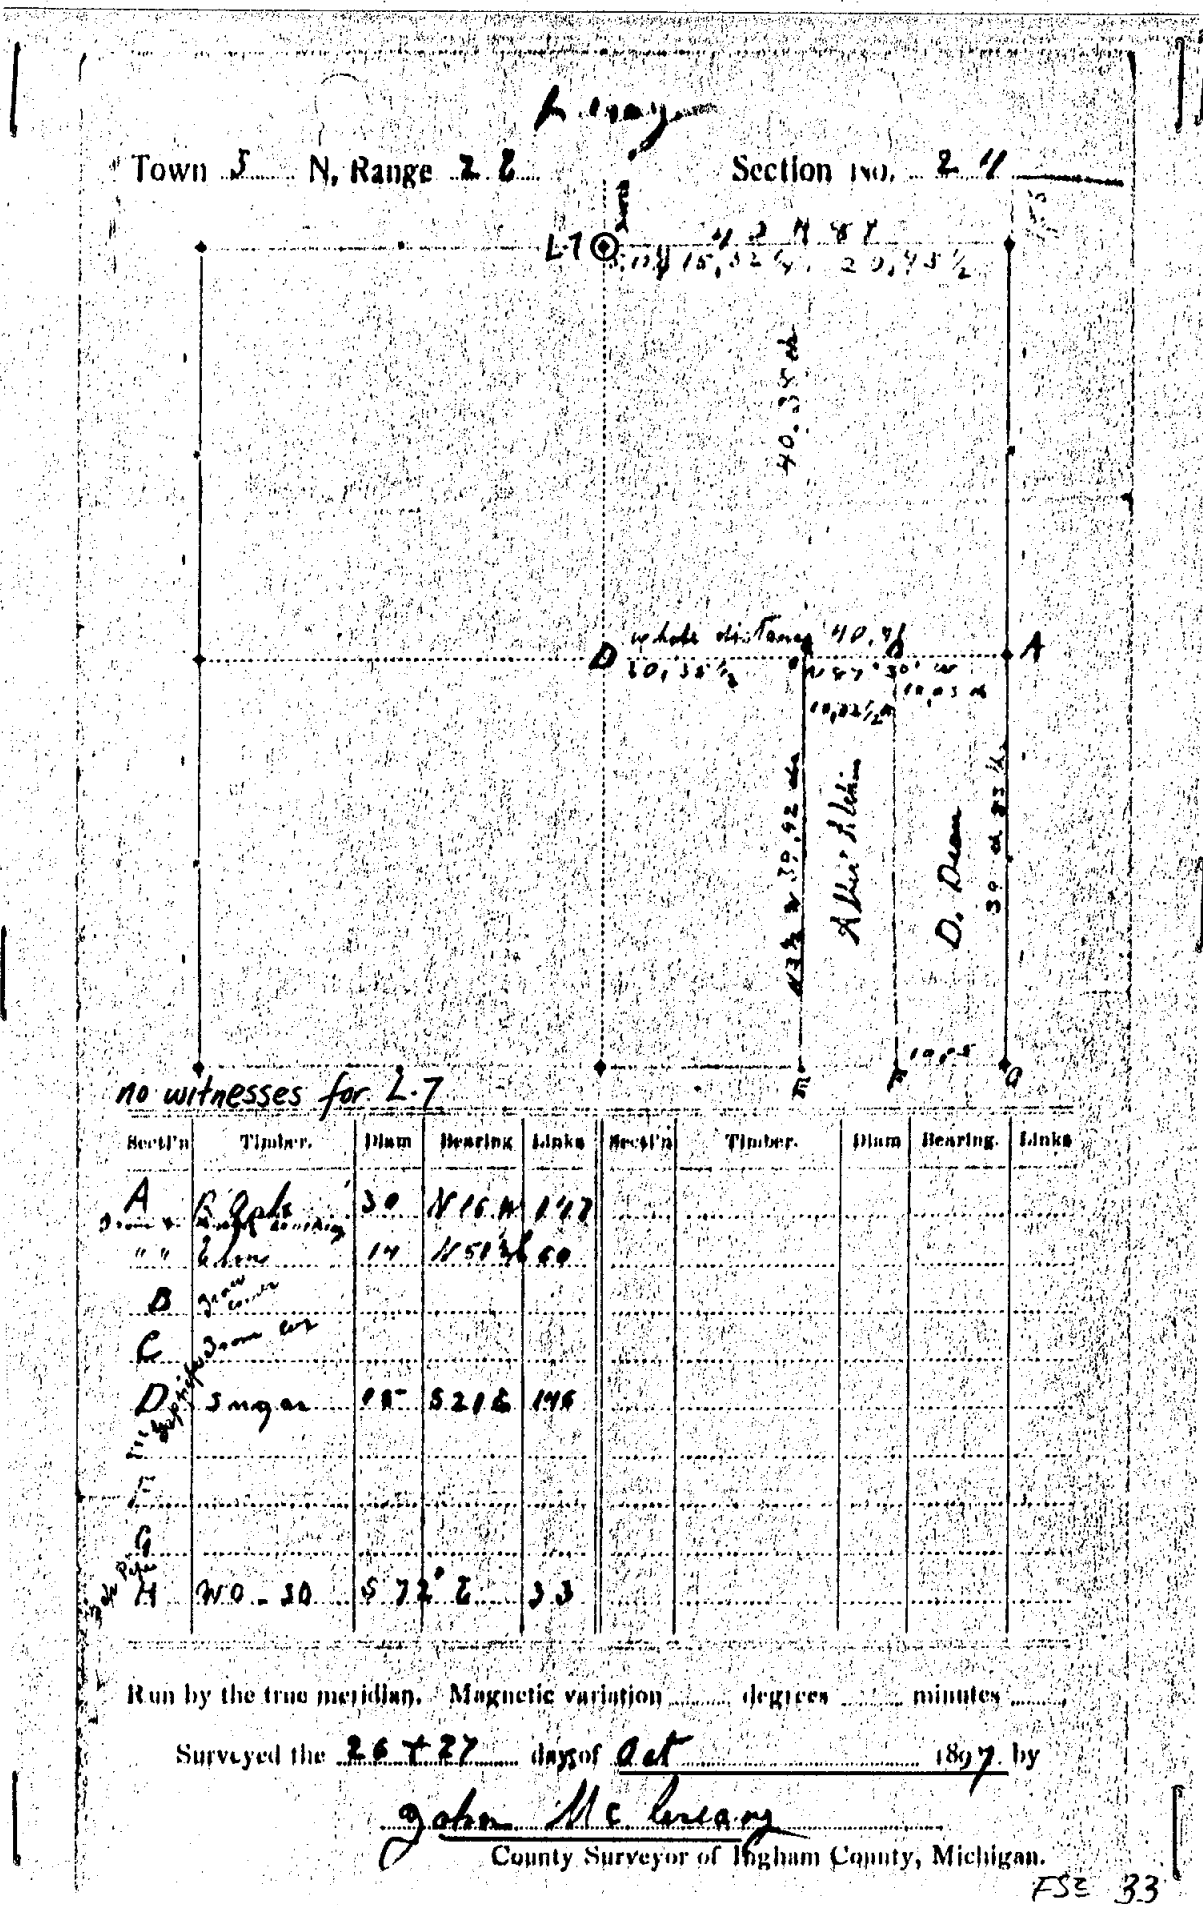

LEROY
township

T 3 N, R 2 E


L. 7
corner code

5
attachment no.

p. 1 of 1

SOURCE: Record of County Surveyor Vol. 2 p.369 (1860)

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at Remon. Office

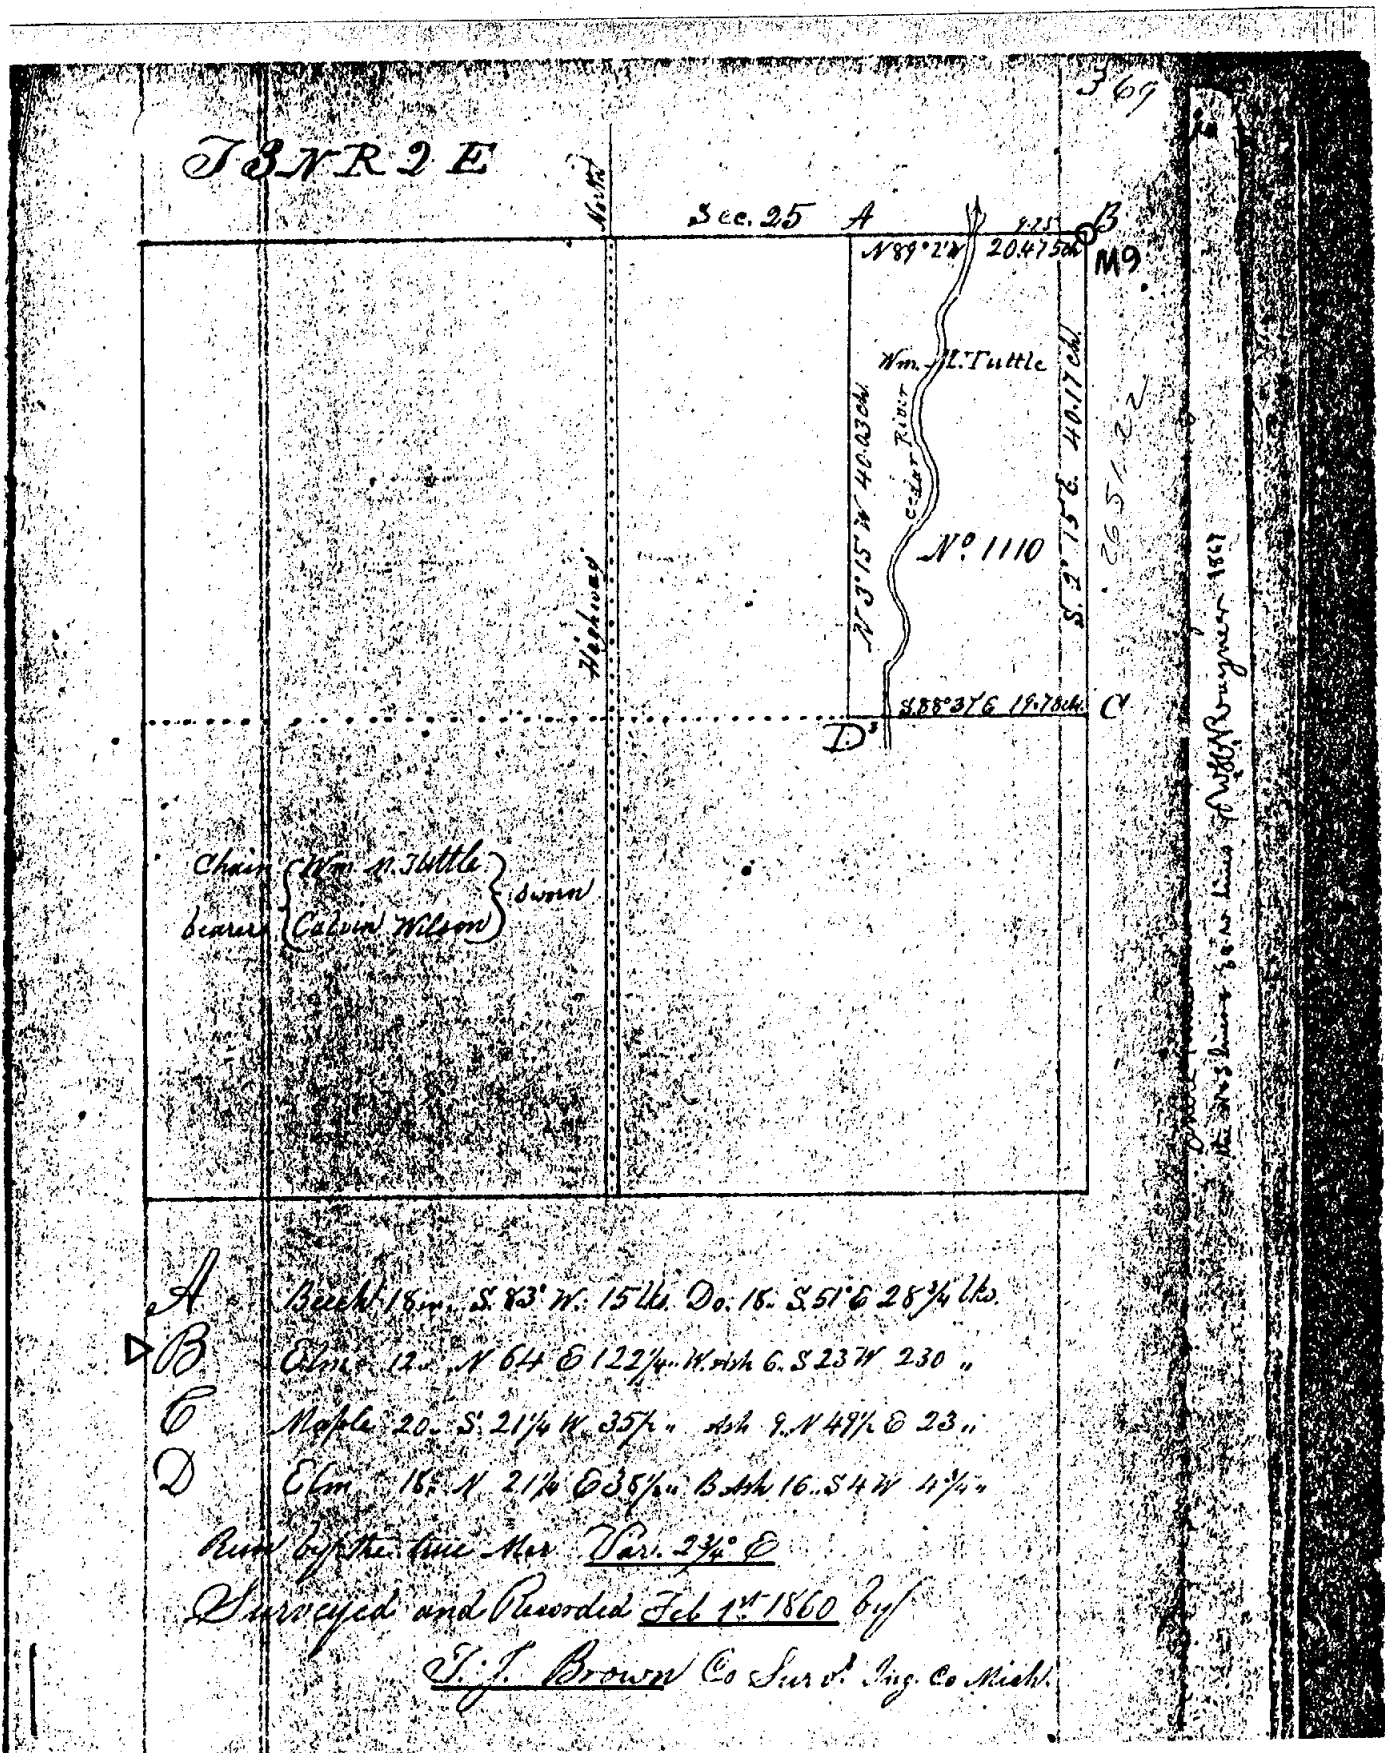


LEROY
township

T 3 N, R 2E

M-9
corner code attachment no.


p. 1 of 1

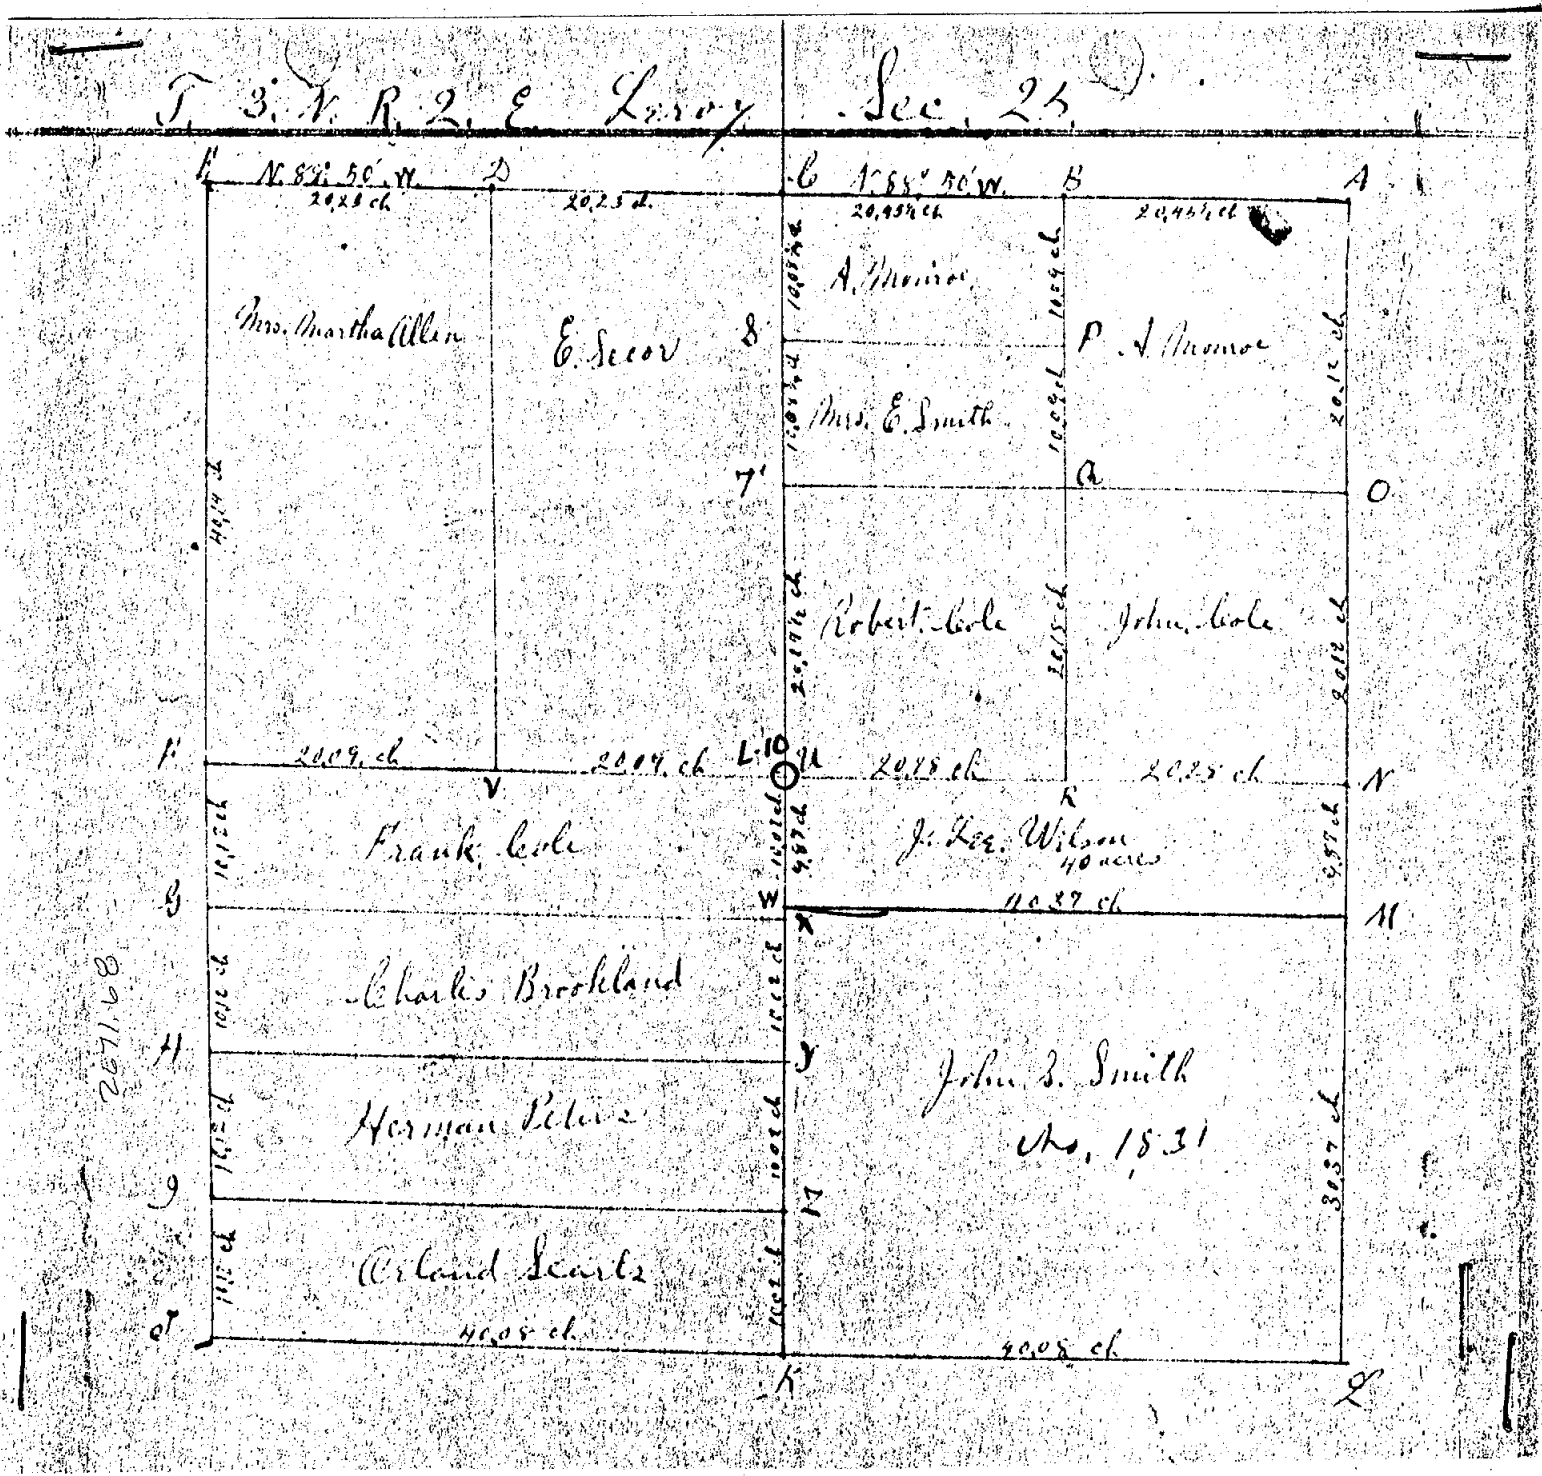

(over)

Town 3 N. Range 22

Section No. 25

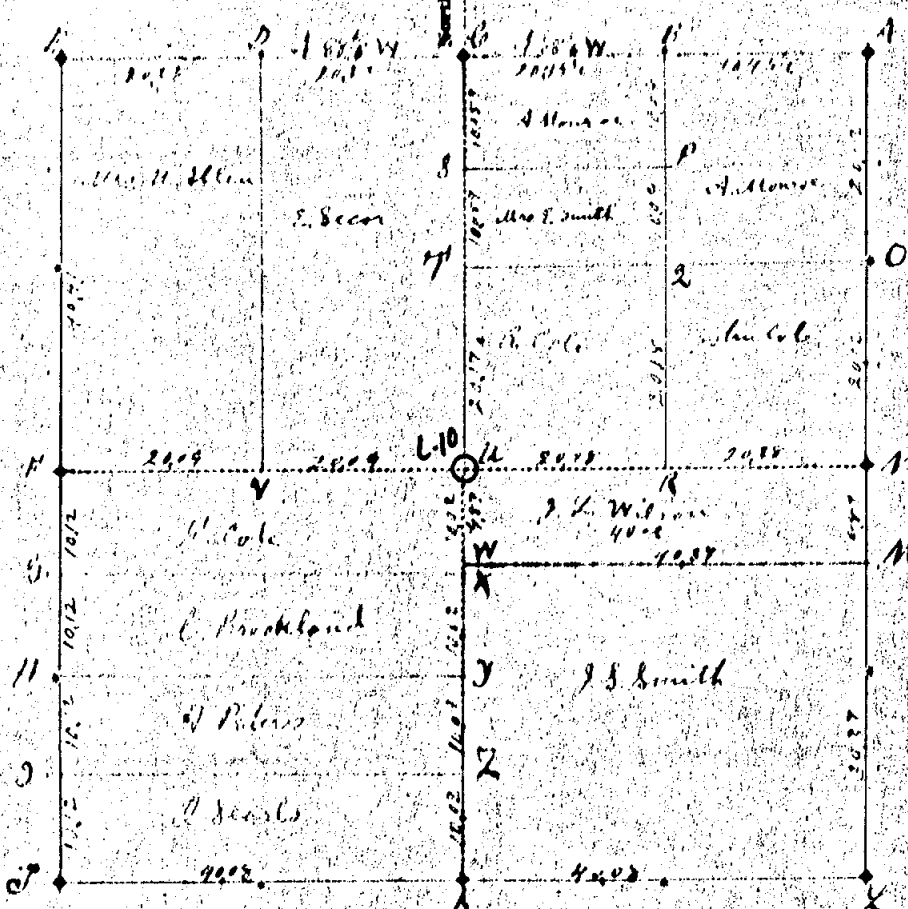

Section	Timber	Diam	Bearing	Links	Section	Timber	Diam	Bearing	Links
A	1/2 W. 1/2	16	N. 21° W.	20	A	1/2 W. 1/2	16	S. 24° W.	61
B	1/2 W. 1/2	16	N. 21° W.	20	B	1/2 W. 1/2	16	S. 24° W.	61
C	1/2 W. 1/2	16	N. 21° W.	20	C	1/2 W. 1/2	16	S. 24° W.	61
D	1/2 W. 1/2	16	N. 21° W.	20	D	1/2 W. 1/2	16	S. 24° W.	61
E	1/2 W. 1/2	16	N. 21° W.	20	E	1/2 W. 1/2	16	S. 24° W.	61
F	1/2 W. 1/2	16	N. 21° W.	20	F	1/2 W. 1/2	16	S. 24° W.	61
G	1/2 W. 1/2	16	N. 21° W.	20	G	1/2 W. 1/2	16	S. 24° W.	61
H	1/2 W. 1/2	16	N. 21° W.	20	H	1/2 W. 1/2	16	S. 24° W.	61
I	1/2 W. 1/2	16	N. 21° W.	20	I	1/2 W. 1/2	16	S. 24° W.	61
J	1/2 W. 1/2	16	N. 21° W.	20	J	1/2 W. 1/2	16	S. 24° W.	61
K	1/2 W. 1/2	16	N. 21° W.	20	K	1/2 W. 1/2	16	S. 24° W.	61
L	1/2 W. 1/2	16	N. 21° W.	20	L	1/2 W. 1/2	16	S. 24° W.	61
M	1/2 W. 1/2	16	N. 21° W.	20	M	1/2 W. 1/2	16	S. 24° W.	61
N	1/2 W. 1/2	16	N. 21° W.	20	N	1/2 W. 1/2	16	S. 24° W.	61
O	1/2 W. 1/2	16	N. 21° W.	20	O	1/2 W. 1/2	16	S. 24° W.	61
P	1/2 W. 1/2	16	N. 21° W.	20	P	1/2 W. 1/2	16	S. 24° W.	61
Q	1/2 W. 1/2	16	N. 21° W.	20	Q	1/2 W. 1/2	16	S. 24° W.	61
R	1/2 W. 1/2	16	N. 21° W.	20	R	1/2 W. 1/2	16	S. 24° W.	61
S	1/2 W. 1/2	16	N. 21° W.	20	S	1/2 W. 1/2	16	S. 24° W.	61
T	1/2 W. 1/2	16	N. 21° W.	20	T	1/2 W. 1/2	16	S. 24° W.	61
U	1/2 W. 1/2	16	N. 21° W.	20	U	1/2 W. 1/2	16	S. 24° W.	61
V	1/2 W. 1/2	16	N. 21° W.	20	V	1/2 W. 1/2	16	S. 24° W.	61
W	1/2 W. 1/2	16	N. 21° W.	20	W	1/2 W. 1/2	16	S. 24° W.	61
X	1/2 W. 1/2	16	N. 21° W.	20	X	1/2 W. 1/2	16	S. 24° W.	61
Y	1/2 W. 1/2	16	N. 21° W.	20	Y	1/2 W. 1/2	16	S. 24° W.	61
Z	1/2 W. 1/2	16	N. 21° W.	20	Z	1/2 W. 1/2	16	S. 24° W.	61

Run by the true meridian. Magnetic variation degrees 10 minutes W.


Surveyed the 1st day of August 1895 by

A. J. Smith, with of a transit line

County Surveyor of Ingham County, Michigan.

Sec. 25 FS 39

SOURCE: Folder Set #1 p. 38-39
 TRANSCRIBED from ~~ORIGINAL~~ **DUPLICATE** on file at Remuneration office

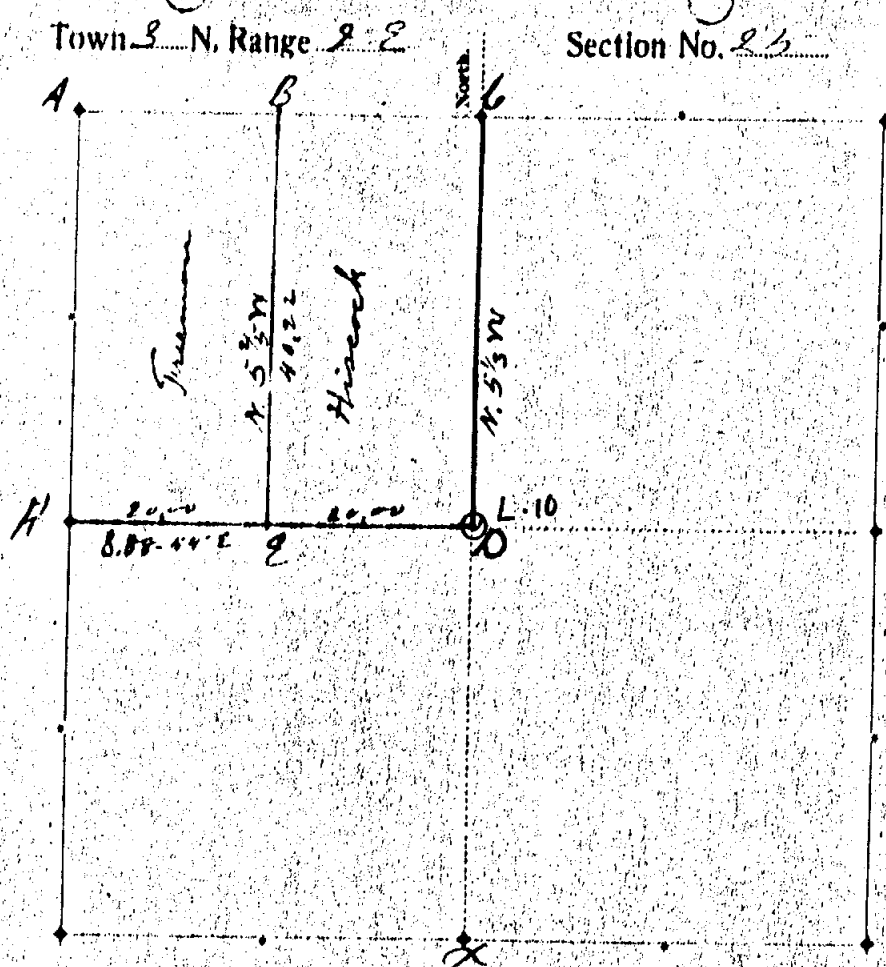

North	Timber	Diam	Bearing	Links	Feet	Timber	Diam	Bearing	Links
X	W. Oak	35	S. 74 1/2 W	18 1/2					
		45	S. 72 1/2 W	10 1/2					
A	W. Oak	12	S. 72 1/2 W	6 1/2					
B	W. Oak	34	S. 72 1/2 W	16					
		22	S. 72 1/2 W	10 1/2					
C	W. Oak	23	S. 72 1/2 W	11					
D	W. Oak	8	S. 72 1/2 W	17					
		32	S. 72 1/2 W	15					
E	W. Oak	26	S. 72 1/2 W	9 1/2					
F	W. Oak	9	S. 72 1/2 W	21 1/2					
G	W. Oak	24	S. 72 1/2 W	34 1/2					
H	W. Oak	15	S. 72 1/2 W	8					
		9	S. 72 1/2 W	7					

Run by the true meridian. Magnetic variation 2 degrees 40 minutes E
 Surveyed the 17 day of March 1886 by

A. Jackson
 County Surveyor of Ingham County, Michigan.

Sec. 25

(over)

LEROY
 township

T 3 N, R 2 EW


L. 10
 corner code attachment no.

5
 p. 1 of 1

SOURCE: Record of County Surveyor Vol. 4 p. 18-19 (1897)
TRANSCRIBED from ~~ORIGINAL~~ on file at Remonumentation Office
DUPLICATE

Town 3 North Range 2 East Leroy Sec 24

Survey No 1849

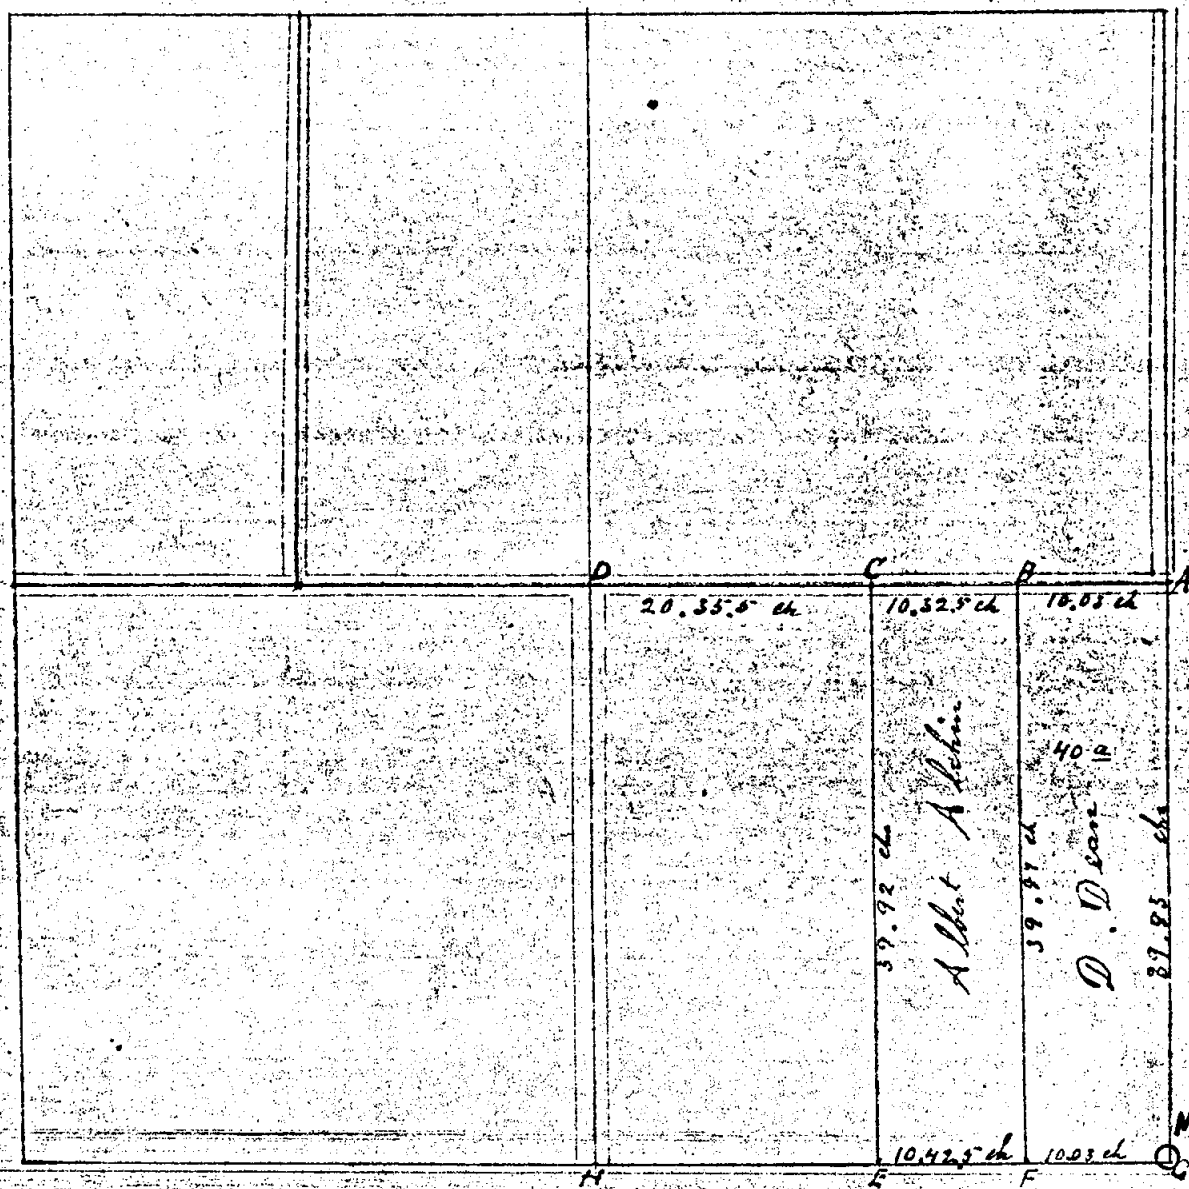

(over)

LEROY
township

T 3 N, R 2 E

M9
corner code

3
attachment no.

p. 1 of 2

Station	Monument	Bearing Tree	Diameter	Bearing & Comp	Sinks
A	Iron Bolt	R Oak	30	N 16° W	147
"	and corking	Elm	14	N 51° 15' E	60
B	Iron	No Tree			
C	Iron	No Tree			
D	Wife's Spear		15	S 21° E	146
E	Post	R Oak	8	N 44 W	55 1/2
F	Post	In marsh	No Tree		
G	Iron Post	W Ash	16	S 23 W	230
"	"	W Ash	20	N 5 W	455
H	Stone and	W Ash	18	N 72° 45' W	163
"	another	Bit High	20	S 73° W	228 1/2

T 19

Survey of the E 1/4 of Section 24 of Range 4 has formerly
 A stone and was taken out because of its inconvenience in the highway and was
 relocated by the R.O. bearing here which L.D. Preston has perpetuated in his private
 records and further proven by cording that was buried under the stone and which
 agreed with the above named private notes the corner D has been the acknowledged
 corner as long as the older residents of the neighborhood have been there some 40 years
 The corner C is in a right line and equi distant from A to D and the corner E is
 equi distant from B to H and the corner B and F set off forty acres from the
 East side of the E 1/4 of section 24 D. Quinn and
 A. A. Quinn Survey

Surveyed Oct 26th & 27th A.D. 1897

John M. Greary County Surveyor