


G.L.O. PLAT MAP
(GENERAL LAND OFFICE)

- T* Tree used as post


Measurements which are shown outside subject township refer to adjacent townships. All measurements shown are in feet.




Surveyor :

The distances and monuments shown are from the original field notes which are held by the Michigan State Department of Natural Resources, Lands Division. Distances were originally recorded in chains and links.

Prepared by the Ingham County Survey
and Remonumentation Project—1978
under the supervision of
Polaris Associates, inc.
Registered Land Surveyors.

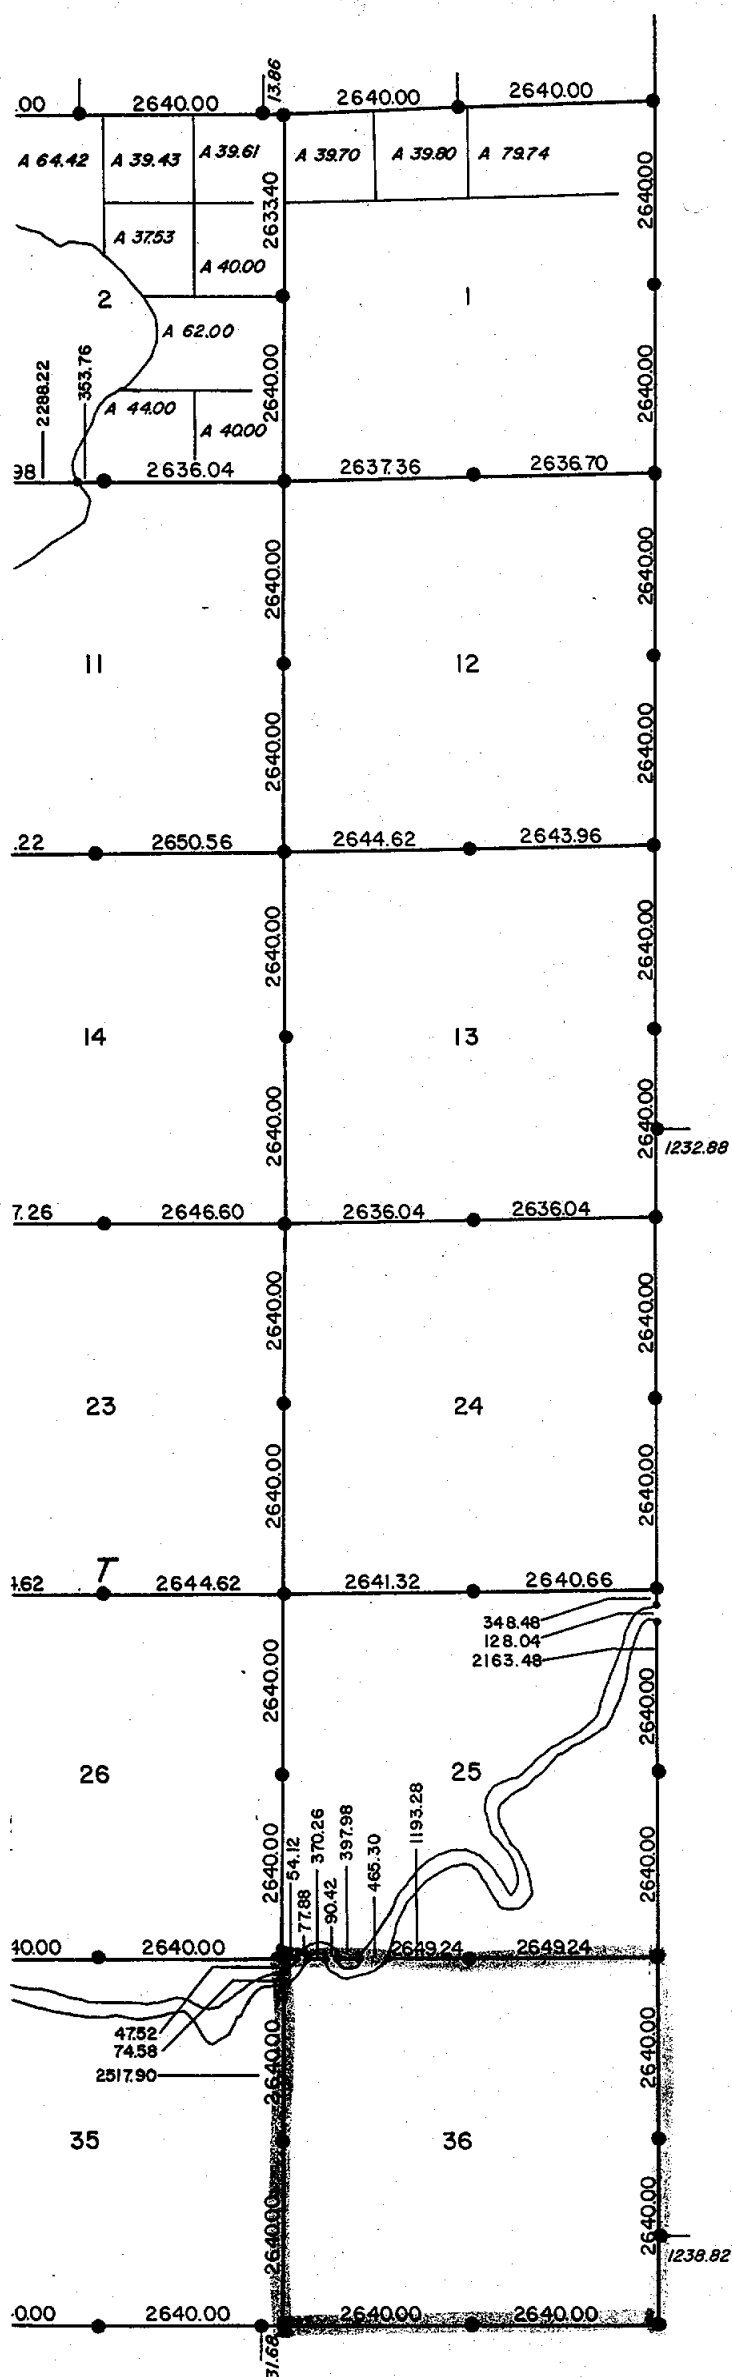

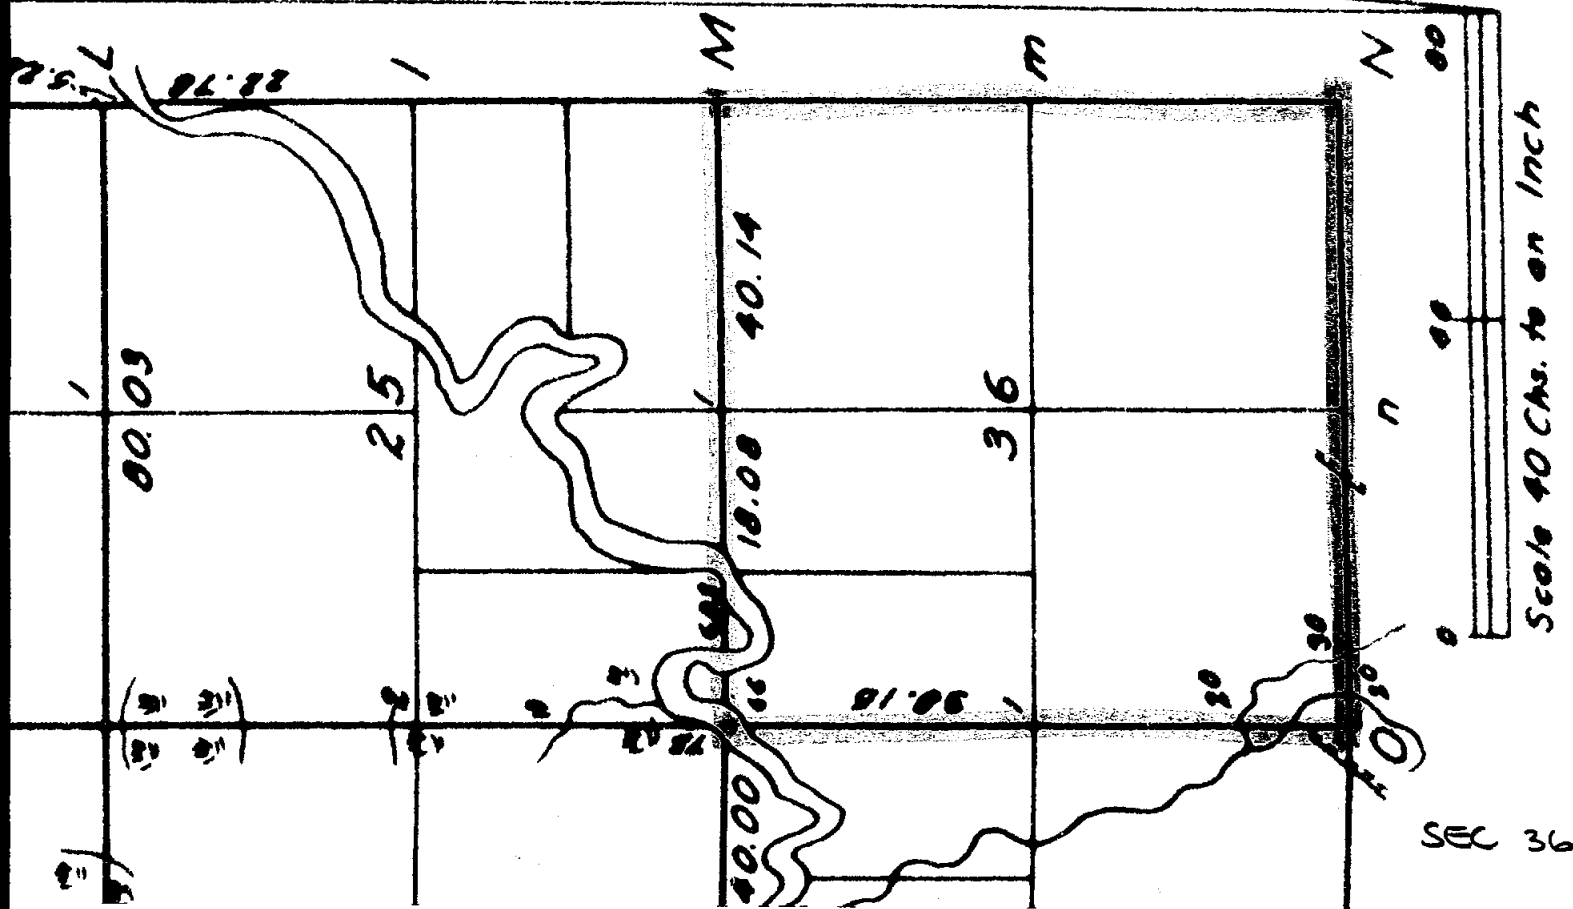

N. 1/2	"	"	70	97	Sec	640
S. W.	Cor.	"	6	60		640
E. 1/2	N. E.	18	160			640
N. 1/2	N. W.	"	80	28	N. fr.	35
N. fr.	"	"	107	32	N. E.	61
E. fr.	S. E.	"	97	76	"	62
N. fr.	S. W.	"	60	14	N. W.	68
	"	"	70	84	"	77
	S. fr.	"	100		"	320
E. 1/2	E. 1/2	19	920		"	160
N. 1/2	N. W.	"	80	12	N. E.	79
E. 1/2	"	"	111		N. W.	74
	S. W.	"	80	56	"	2
N. 1/2	"	"	113	00	"	320
	N. fr.	20	119		S. 1/2	
Total						22,758 29

Surveyed in January & Feb., 1827, by Musgrave Evans.

Surveyor General's Office,
June 26th, 1827.

A true Copy

Edward D. Fisher

SOURCE: G.L.O. MAP Sh. 10

TRANSCRIBED from ~~012220~~ on file at REMON. OFFICE
DUPLICATE

SURVEYOR'S NAME _____ SURVEYOR NO. _____

DATE OF SURVEY _____ SECTION NO. 24, 25

MAGNETIC VARIATION 9° 25' E.

NOTE: Distances between section corners and section $\frac{1}{4}$ corners are assumed to be 40.00 chs. unless a written distance is indicated.

Distances between $\frac{1}{8}$ corner and either a section corner or a section $\frac{1}{4}$ corner are assumed to be 20.00 chs. unless a written distance is indicated.

Distances to section centers can not be assumed and will not be shown since section centers were not set at this time.

Offsets if given will be indicated by a line perpendicular to the township line with a written distance above or below the line. Offsets will never be assumed and will come hand transcribed directly from our copies of the G.L.O. maps.

