



T. 4 N R. 1 W SEC. 25

Sec. 25	
K-11	

N

REMARKS

Section Corner common to Sec. 25-26-35-36
Ingham County, Meridian Township.
Found 2" Wooden Stake, replaced with a
1" Iron, fence post.

WITNESSES

S.E. Leg Consumers Power Tower
N28W 130.91'
Rivers Edge May 11, 1959
Due East 32.0'

C. Smith 5-25-59 K-11

4 N R. 1 W Meridian Twp. 33151A SEC. NO. 26

Sec. 26	

N

DESCRIPTION Found 1 1/4" gas pipe
for Section corner common to Secs. 25,
26, 35, 36 Meridian Twp., Ingham CO.

Power Tower

1 1/4" Gas Pipe

9" Box Elder

9" Maple

12" Twin Box Elder

35.48

35.50

WITNESSES.

N 13 W	135.50	SE leg Power Tower #
N 78 E	49.12	9" Box Elder
S 80 E	53.50	9" Maple
S 35 E	35.48	12" Twin Box Elder

Form 280 (Rev. 3/60) GOV'T. MONUMENT WITNESSES RE

MICHIGAN STATE HIGHWAY DEPARTMENT

Phil Wetoskey RLS 1-11 April 1967


SURVEY CHIEF DATE

GOV'T. MONUMENT WITNESSES RECORD

Form 280
(Rev. 3/60)


T. 4 N R. 1 W Meridian Twp. 33151A

SEC. NO. 3636




DESCRIPTION Found 6" pointed rock
6 inches above ground. W¹/₄ corner Sec.
36, T4N, R1W, Meridian Twp., Ingham Co.

WITNESSES
N 15 E 30.22' 30" Twin Poplar
S 28 E 29.07' 24" Triple Oak
S 32 W 32.14' 22" Poplar

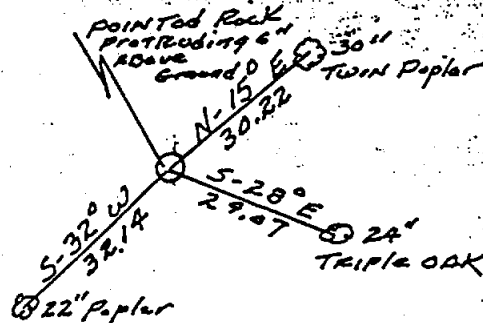


Philip Wetoskey RLS/K-12 April, 1967
SURVEY CHIEF DATE

MICHIGAN STATE HIGHWAY DEPARTMENT



1318.47



K-12

TAN. RZ E


MDSH

K-12

T. 4 N R. 1 W

33151 R

SEC. 35



REMARKS

Section Corner Common to Sections,
35, and 36, Meridian Township, Algham
County.

Iron incenter of Cavanaugh Rd., at
Every Rd..

WITNESSES


19" Elm S40E 40.03
T.P. N70E 63.70
S.E. Corner of Bridge Pipe Railing
S70W 50.77

C. Smith 5-25-59 K-13 103

GOV'T. MONUMENT WITNESSES RECORD
Form 280
(Rev. 3/60)

T. 4 N R. 1 W Meridian Twp. 33151A


SEC. NO. 36



DESCRIPTION SW corner Sec. 36;
T4N, R1W, Meridian Twp. (1" iron)

WITNESSES

N21E 28.25 T.Pole

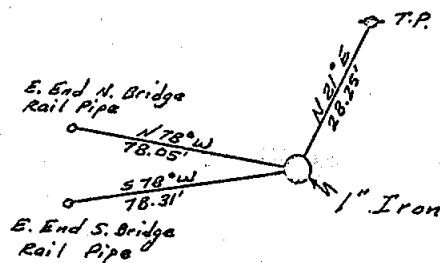N78W 78.05 E. end North
bridge railS78W 78.31 E. end South
bridge rail


C.E. SMITH

March 1967

MICHIGAN STATE HIGHWAY DEPARTMENT

SURVEY CHIEF

DATE

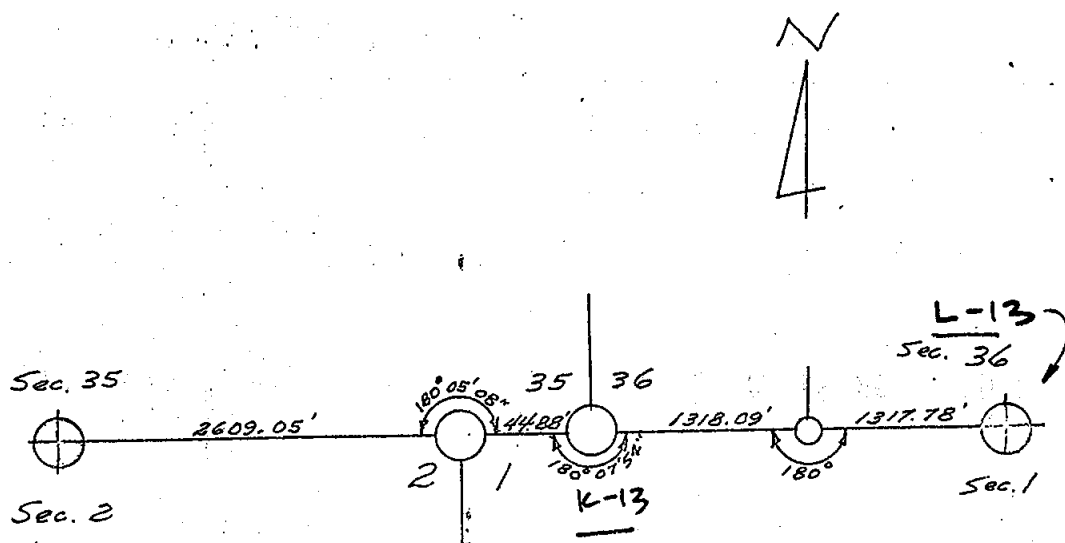

K-13



MDSH

K-13


Form 260
(Rev. 3/60)
GOV'T. MONUMENT WITNESSES RECORD

T. 4 N R. 1 W Meridian Twp. 33151A

SEC. NO. 25



DESCRIPTION $\frac{3}{4}$ " pipe in fence corner. South $\frac{1}{4}$ corner Sec. 25, T4N, R1W, Meridian Twp. Ingham Co.

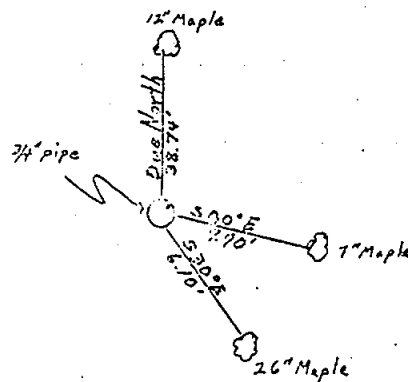


WITNESSES

Due North 38.74 12" Maple
S 80 E 9.90 7" Maple
S 30 E 6.10 26" Maple

MICHIGAN STATE HIGHWAY DEPARTMENT

Philip Metoskey
SURVEY CHIEF

April, 1967
DATE

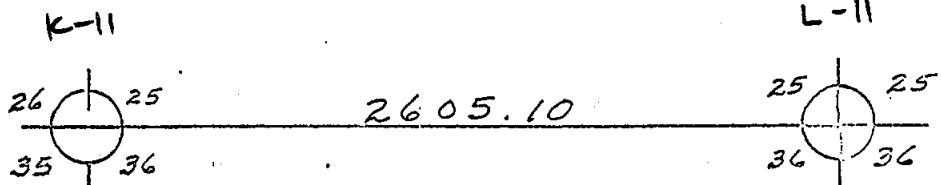


L-11

MDSM

L-11

GOV'T. MON. WITNESS RECORD SEC. NO. 36

N Meridian TWP. T4N, R1W

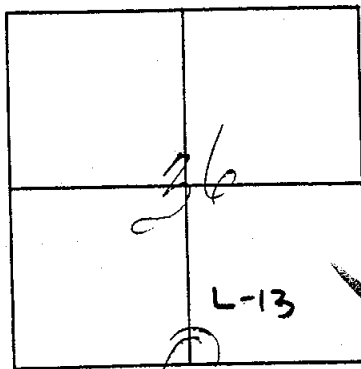

WITNESSES: S 1/4 COR.

1" Iron Pipe & Jolly Rd.
on a PROJECTION of a FENCE
N of CORNER


DESC.:

N 64° 54' E 66.39' 24" WALNUT Tag S side
N 4° 02' W 70.38' 8" WALNUT Tag S side
S 40° 37' E 68.82' UTIL. POLE Tag N side
L3 P. 291 JAMES E. STEPHENS 10-7-74
SURVEY CHIEF DATE

GOV'T. MONUMENT WITNESSES RECORD

T. 4 N R. 1 W meridian Twp. 33084C


SEC. NO. 36



WITNESSES

N01W 94.76 20" Twin Hickory
N71E 70.78 20" Walnut
S43E 71.06 P.Pole & T.Pole
S43W 39.38 Nail & ref. tag
in 24" stump

DESCRIPTION South 1/4 corner Sec.
36; T4N, R1W, Meridian Twp. (1/2" pipe)

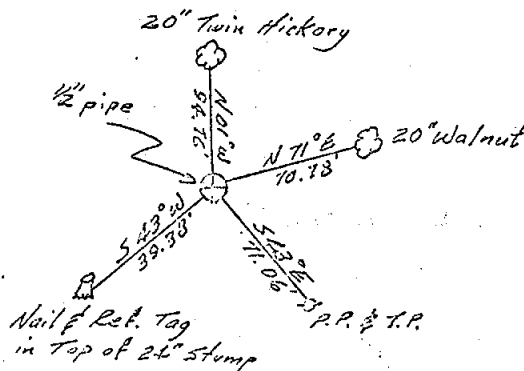


OVER
MICHIGAN STATE HIGHWAY DEPARTMENT

PHIL WITOSKEY
SURVEY CHIEF

MARCH 1967
DATE

ICRC
14" Elm 39.6 SW
10" Walnut 70.8 ENE
12" Elm 63.5 SW

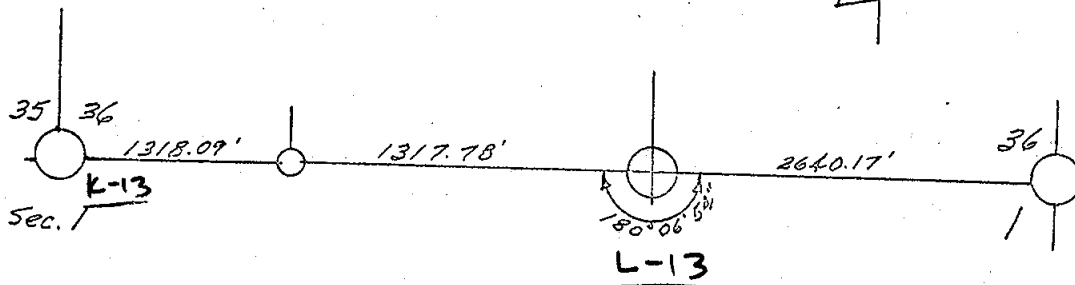


L-13

MDSH L-13

Form 300
(Rev. 3/60)
GOV'T. MONUMENT WITNESSES RECORD


T. 4 N R. 1 W Meridian Twp. 33084C

SEC. NO. 36



DESCRIPTION Found $\frac{1}{2}$ " pipe;
Southeast corner Sec 36, T4N, R1W,
Meridian Twp.


WITNESSES
N28°W 58.94 T. Pole
N43°W 42.67 25" W. Cherry
S33°E 63.49 30" Maple
S13°W 110.14 T. Pole

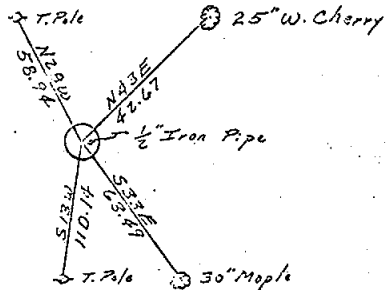

MICHIGAN STATE HIGHWAY DEPARTMENT

Phil Wetoskey
SURVEY CHIEF

March 1967
DATE

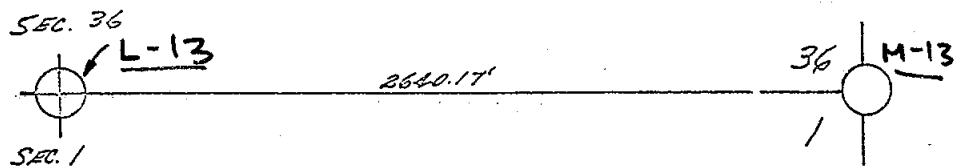

M-13


MDSH

M-13

SOURCE: Consumers Power Co. Sh. 1 # 3
TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at Sh. 1 #21
Remonumentation Office

K-11
N.E. Corner Sec. 35
Hub. Stake
S.E. Leg Tower 29.38 N.13°20'W. 135.5'
See #21

#21
N.E. Corner Sec. 35
Set 1 1/4" x 30" Gas Pipe
15' E. of Line of towers N. #2937
S.E. Leg of tower #2938 N.13°20'W. 135.5'
FB 740P ~~115~~ /15

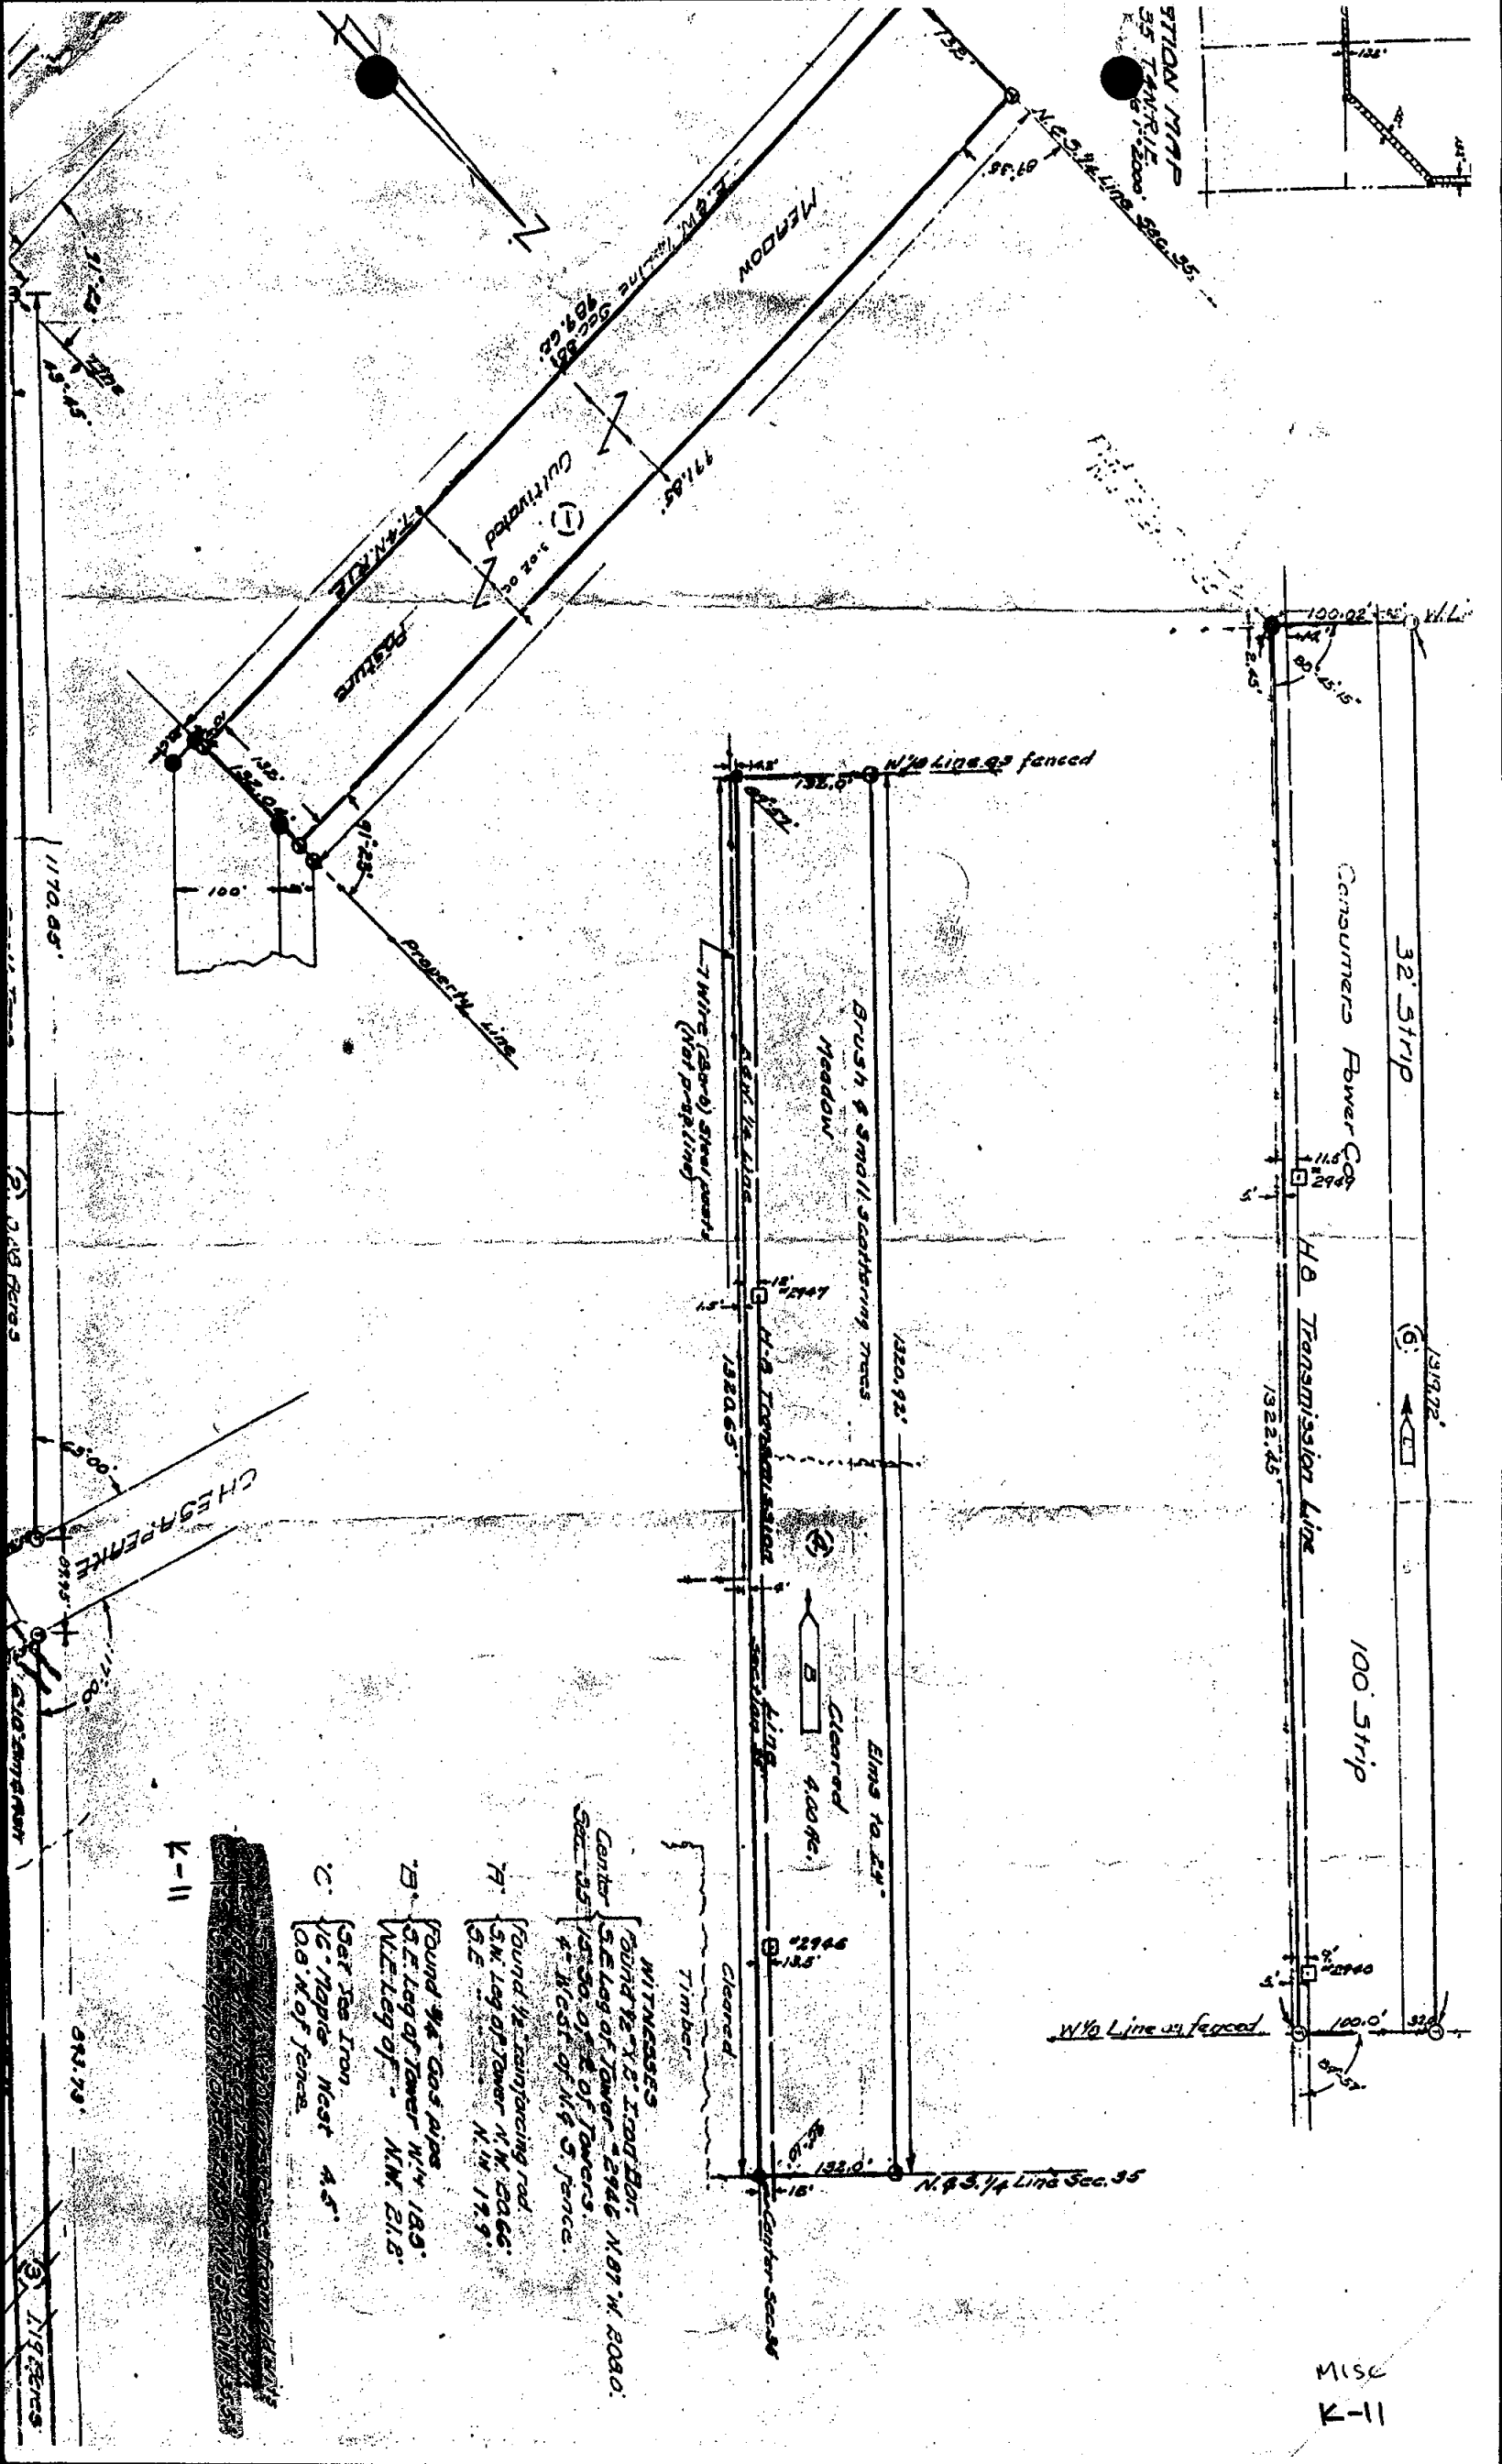

SECTION MAP
35 TAN 15 2000

MISC
K-11

K-11

- WITNESSES
- BOUNDARY LINE - 1000' EOL
- Center 5 E Log of Tower - 2946 N 87 W 2030
- Sec 35 15 30 05 E of Tower
- 4' West of H.B. S. fence
- Found 1/2" reinforcing rod
- 5 W Log of Tower N 14 W 2066
- 3 E
- Found 3/4" Gas pipe
- 5 E Log of Tower N 14 W 183
- W. Log of - N 14 W 21.8
- Set 3/8" Iron
- 1/2" Maple West 4.5'
- 00' of fence

SOURCE: NOTHSTINE NOTES P. 20
TRANSCRIBED from ORIGINAL on file at REMON. OFFICE
DUPLICATE

Township: Meridian
Section: 35

U - plow point J-12 UNRECORDED
14" elm N 2 1/2° W 97 1/2'
SE leg C.P. Co. Tower # 2946 - N 67° W

K-11 [1 - 2" wood stake K-11 UNRECORDED
SE leg C.P. Co. tower # 2938 - N 13° 20' W 135.5'

4 - Iron K-13 RECORDED
19" elm S 40° E 40.03'
T.P. N 70° E 63.70'
S.E. Corner of bridge pipe railing
S 70° W 50.77' (5/25/59)

C. Iron J-13 RECORDED
22" Butternut S 60° E 44.07'
28" elm N 50° E 33.74'
7" elm N 65° E 56.03'

K-11 [1 - 'T' Iron fence post K-11 UNRECORDED
S.E. Leg Consumers Power Tower
N 28° W 130.91'
Rivers Edge May 16, 1959
Due East 32.0 (5/25/59)



3422 HAGADORN ROAD

MASON, MICHIGAN 48854

PHONE 517 / 351-7410

August 2, 1979

Mr. Austin Williams
1148 Okemos Road
Mason, Michigan 48854

Re: M-11 & M-12
Meridian Township

Dear Mr. Williams:

During the course of our preliminary field inspection of possible excavation sites we found evidence of monumentation in the vicinity of M-11 and M-12, T4N, R1W.

(M-11) In the vicinity of M-11, T4N, R1W we found an iron with your cap $\pm$ 2.0' west of the centerline of Meridian Road and on an old fence line to the west.

(M-12) In the vicinity of M-12, T4N, R1W we found a 1/2" bar with your cap in the centerline of Meridian Road and on a fence to the west.

If you are satisfied that your irons in the vicinity of M-11 and M-12, T4N, R1W are in the correct location, we would like to request that you record these corners as soon as possible in accordance with Michigan Public Act 74. If for some reason, you will not be recording these corners, please contact us so we may include these corners (M-11 and M-12) in our excavation schedule. If you have any questions, please feel free to call.

Sincerely,


Ron Lester

HP2001 MTC 90 43224
HIGH EXCEED ROAD
AND BOLLARD MILLWIDE

DISCREPANCY

W/ 104 W/ 104/ 104 15324

SHORE 111 12-11110

PROPERTY LOCATION


SECTION 10, T4N, R10E

SECTION 10, T4N, R10E

SECTION 10, T4N, R10E


TECH. SUP'R. RON LESTER TOWNSHIP MERIDIAN
COMPANY POLARIS CORNER CODE M-11
FIELD SQUAD RECORDED CORNER 2010
DATE ROAD NAME MERIDIAN

Sketch, witness, and describe monuments found, and location relative to traverse point and centerline of road.

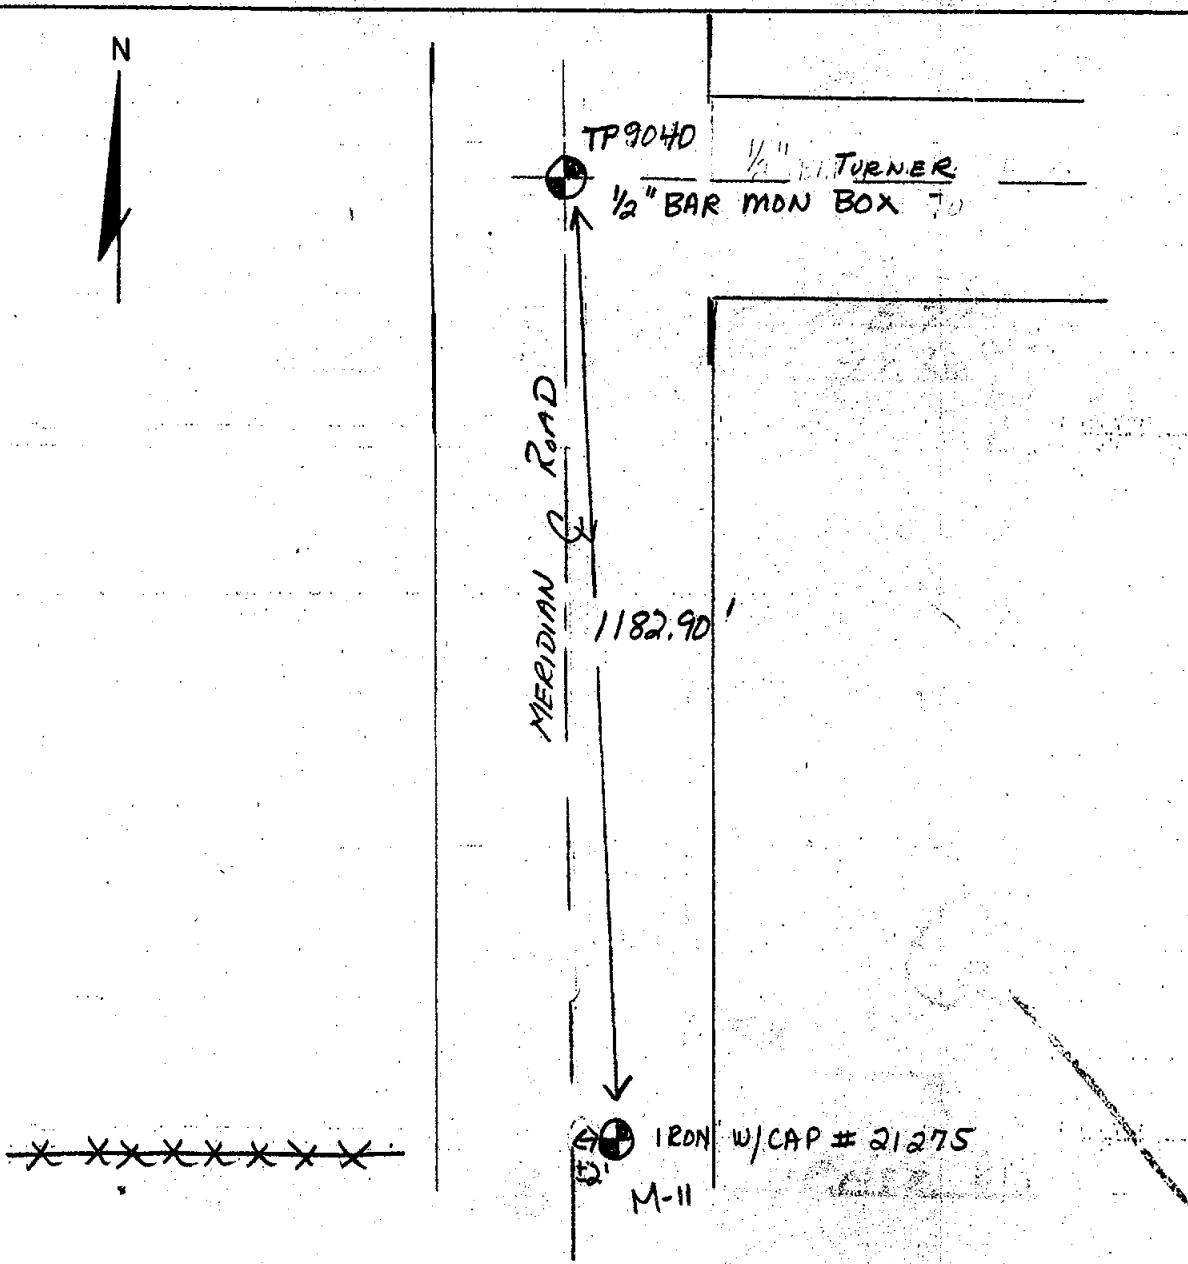

TECH. SUP'R. R. LESTER TOWNSHIP MERIDIAN
COMPANY POLARIS CORNER CODE M-11
FIELD SQUAD PLATT ROAD NAME MERIDIAN

Sketch, witness, and describe monuments found and proposed excavation site relative to traverse point and centerline of road.

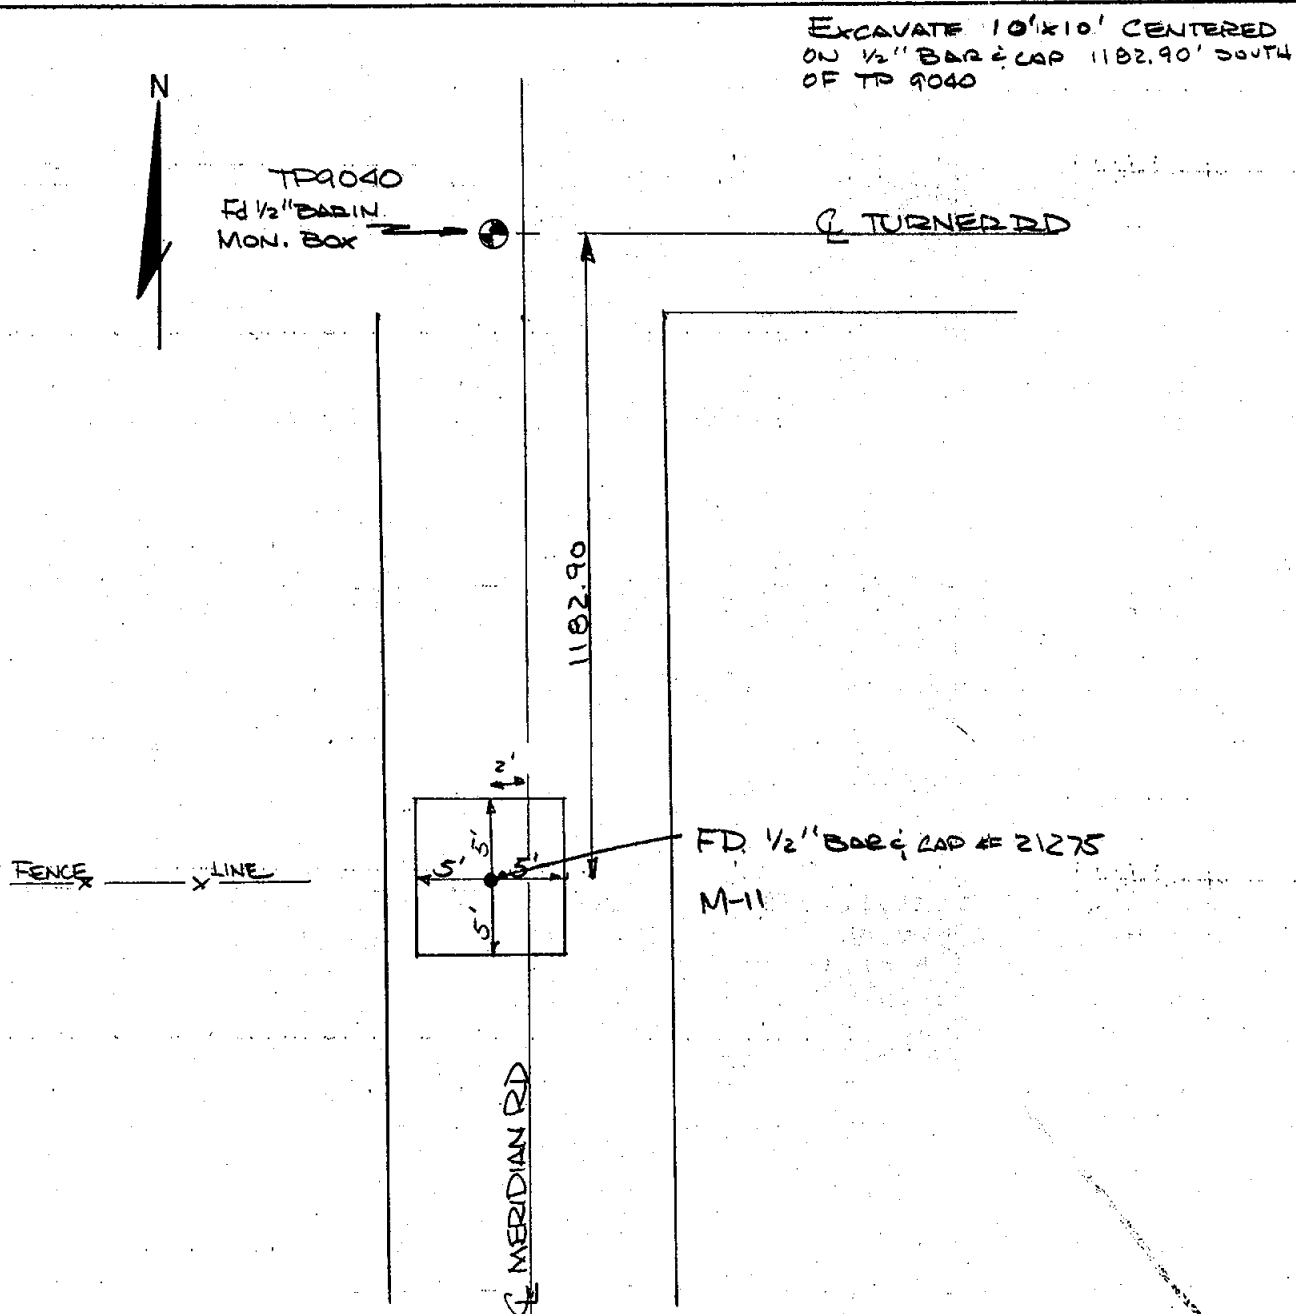


TECH. SUP'R. R. DONLESTER TOWNSHIP MERIDIAN

COMPANY POLARIS CORNER CODE M-11

FIELD SQUAD PLATT PAGE 1 OF 1 DATE 5-27-80

EXCAVATED AREA: 5x10 50 SQ. FT.; AVG. DEPTH 2.8 SURFACE ASP

Sketch and describe roads, monuments found or set, and witnesses established:

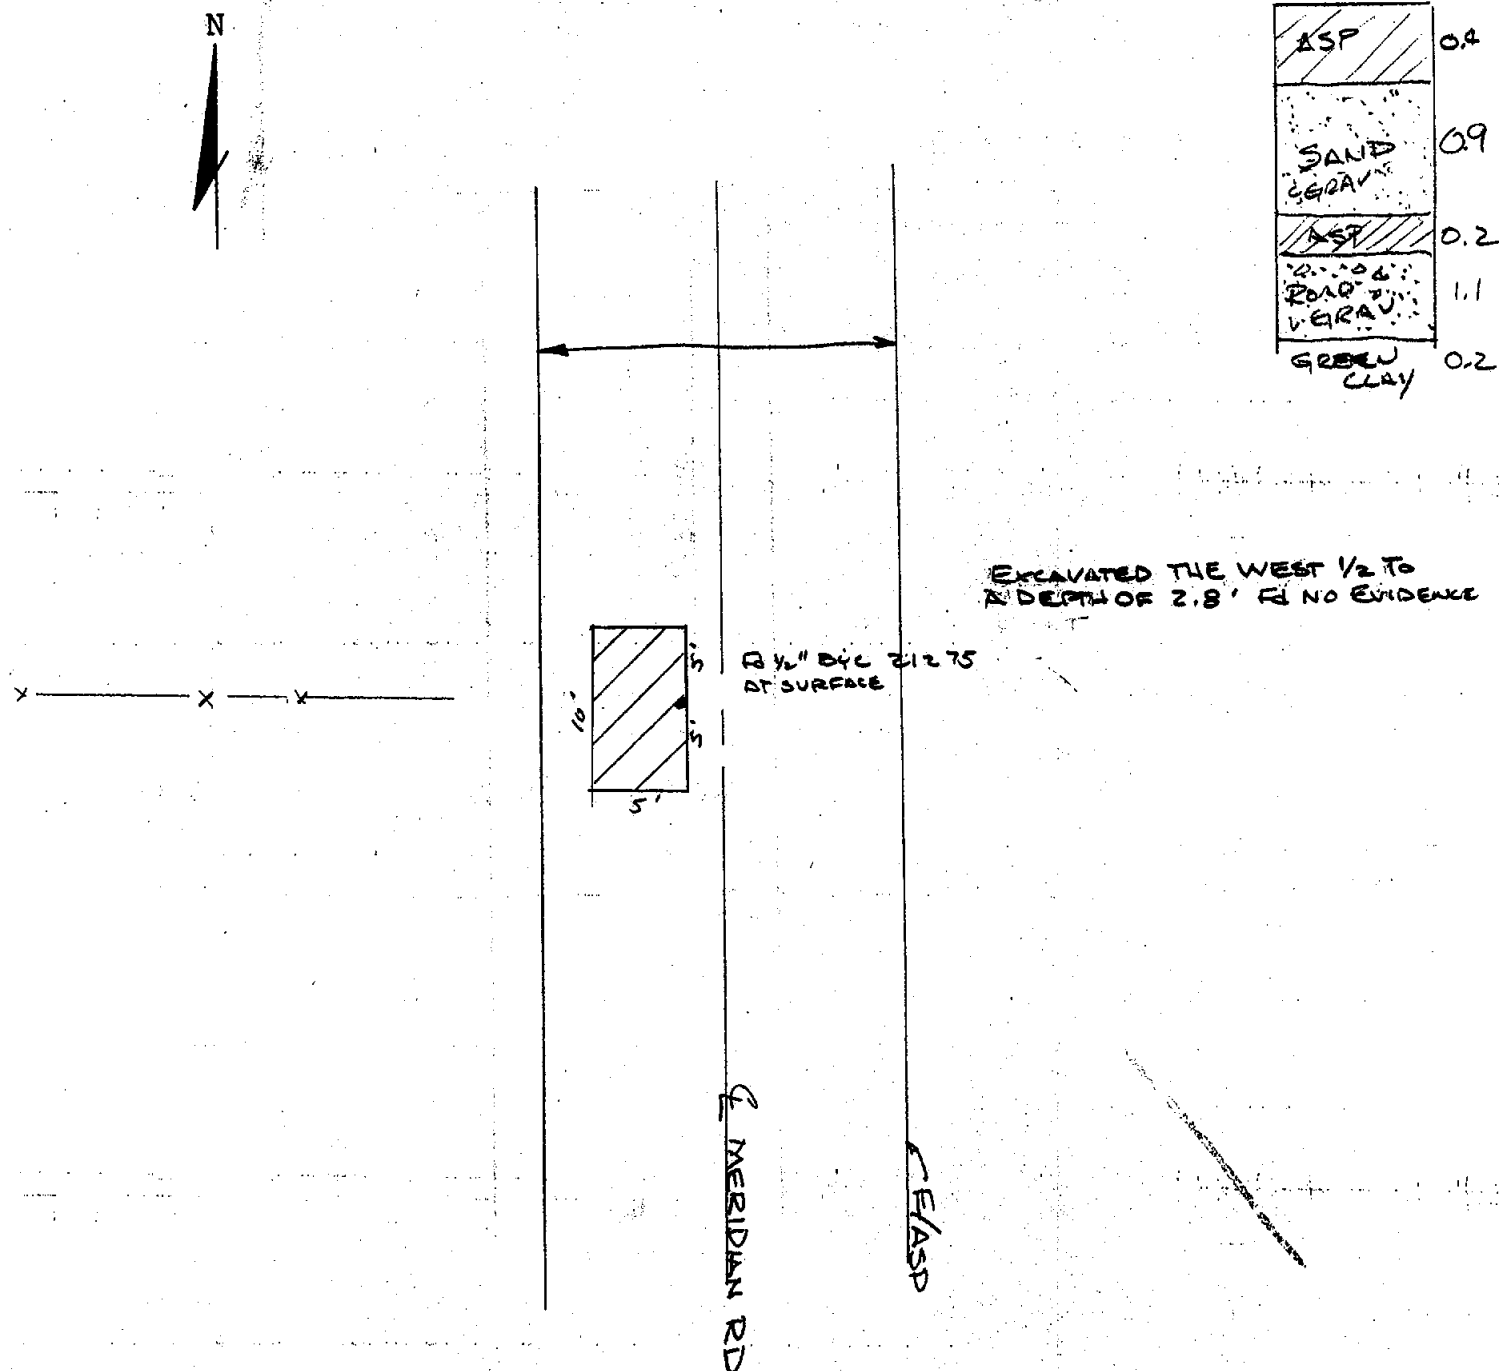

TECH. SUP'R. R. LESTER TOWNSHIP MERIDIAN

COMPANY POLARIS CORNER CODE M-71

FIELD SQUAD PLATT / DALE PAGE 1 OF 1 DATE 5-30-80

EXCAVATED AREA: 5x10 50 SQ. FT.; AVG. DEPTH 2.8 SURFACE ASP


Sketch and describe roads, monuments found or set, and witnesses established:








Road

COMPLETED EXCAVATION
AS CALLED FOR. Fd NO
EVIDENCE


Fd 1 1/2" BAR
9 CAP
AT SURFACE



ASP		0.4'
SAND & GRAV		0.9
ASP		0.2'
ROAD GRAV		1.1'
GREEN CLAY		0.2'


TECH. SUP'R. ROAL LESTER TOWNSHIP WYOMING COUNTY WYOMING
COMPANY POLARIS CORNER CODE M-12
FIELD SQUAD _____ RECORDED CORNER _____
DATE _____ ROAD NAME MERIDIAN

Sketch, witness, and describe monuments found, and location relative to traverse point and centerline of road.

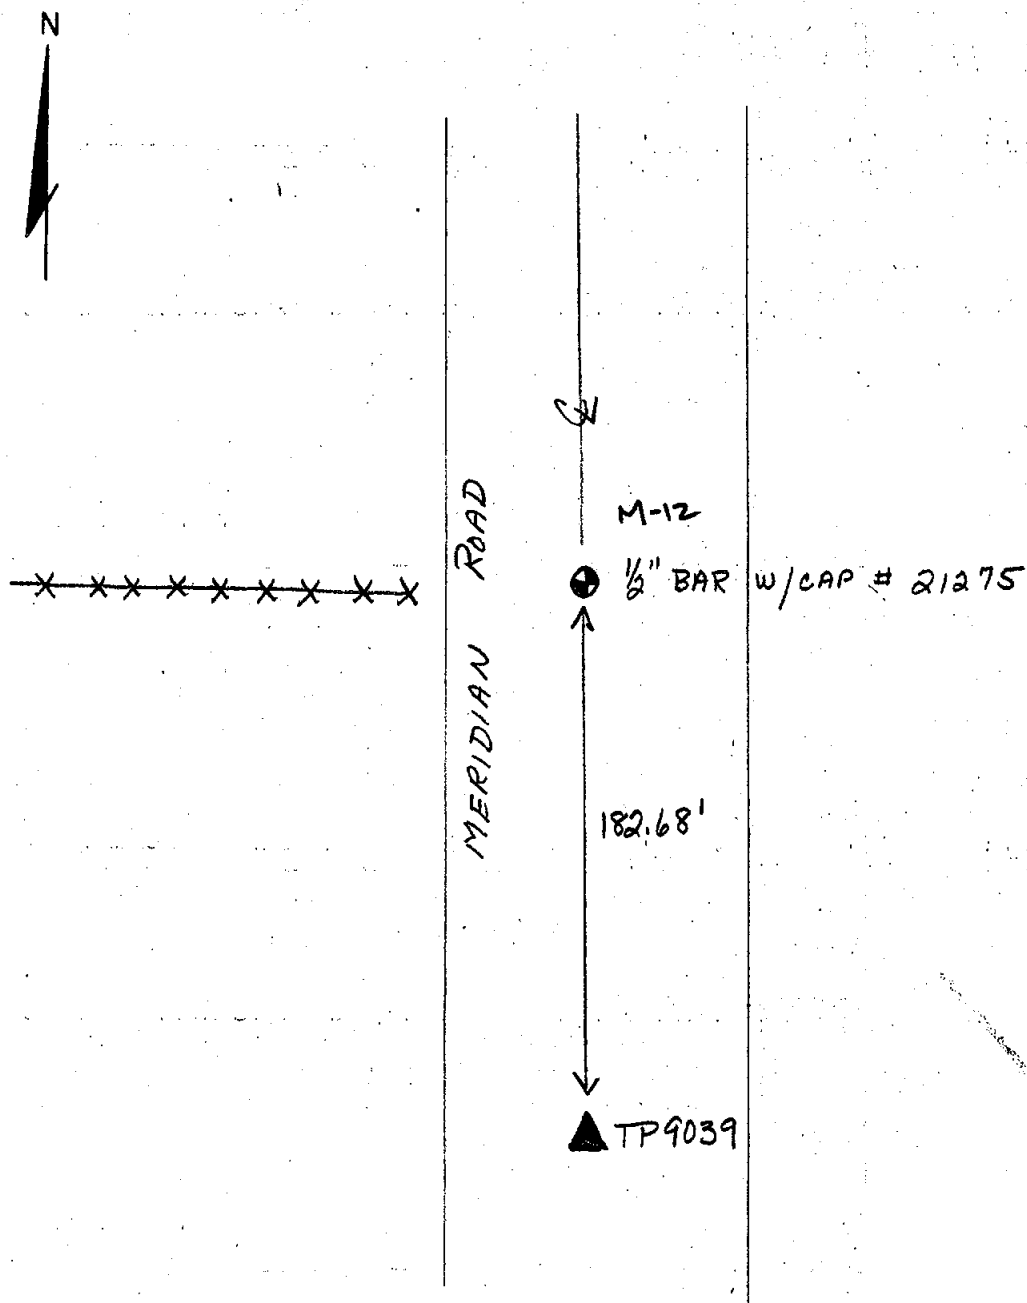

TECH. SUP. R. LESTER TOWNSHIP MERIDIAN
 COMPANY POLARIS CORNER CODE M-12
 FIELD SQUAD PLATT ROAD NAME MERIDIAN (ASP)

Sketch, witness, and describe monuments found and proposed excavation site relative to traverse point and centerline of road.

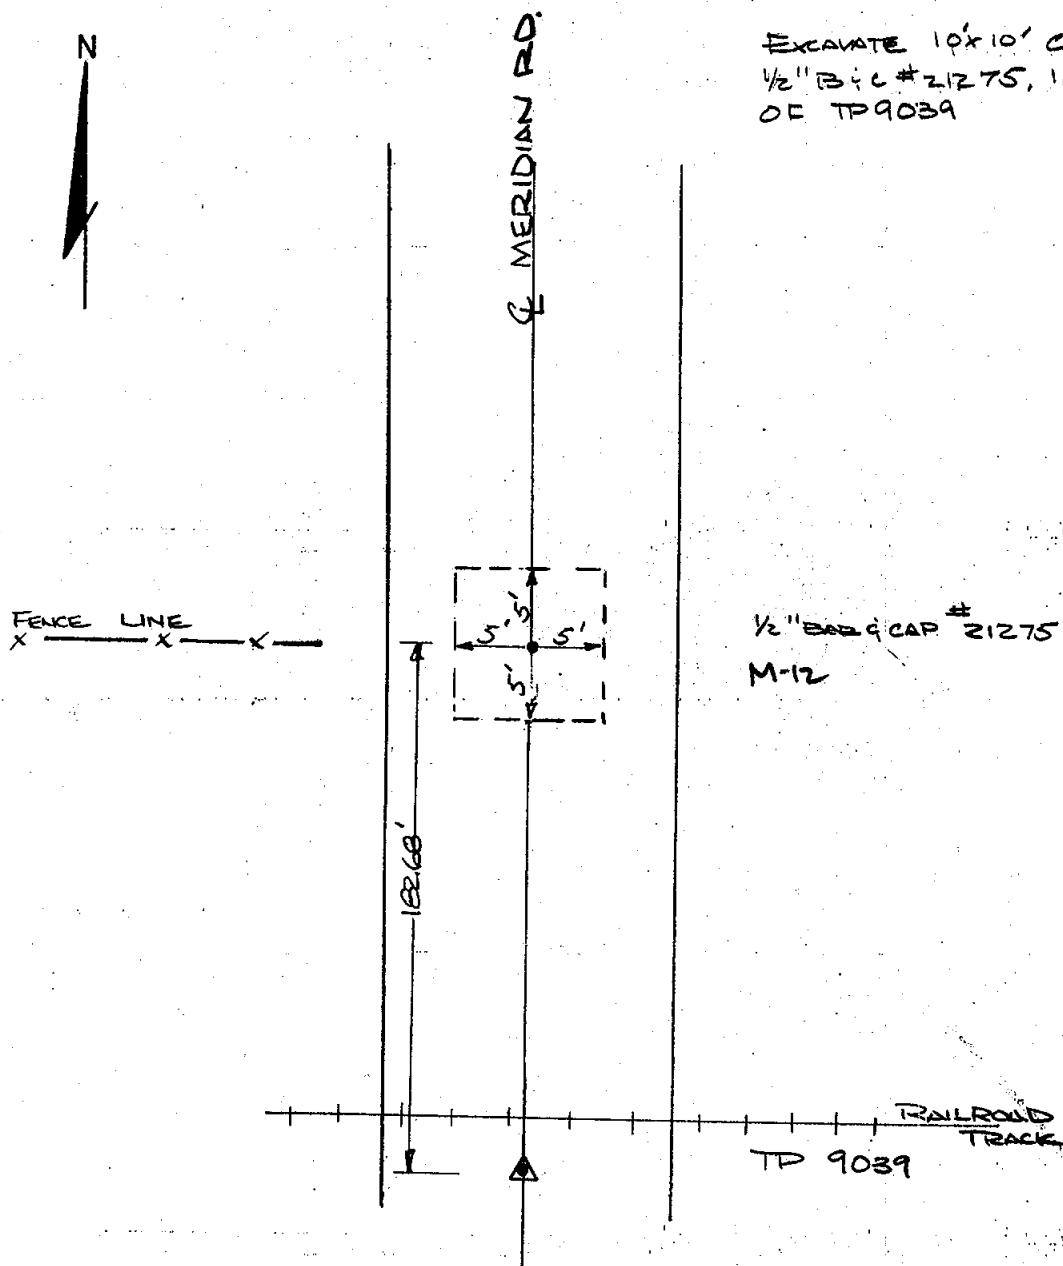

EXCAVATE 10'x10' CENTREED ON
 1/2" B&C #21275, 182.68' NORTH
 OF TP 9039


1/2" B&C CAP #21275
 M-12

TECH. SUP'R. TEFF TOWNSHIP MERIDIAN
COMPANY POHARIS CORNER CODE M-12
FIELD SQUAD 3 PAGE 1 OF 1 DATE 5-27-80

EXCAVATED AREA: 4.8 x 10.0' SQ. FT.; AVG. DEPTH 2.5' SURFACE ASPH

Sketch and describe roads, monuments found or set, and witnesses established:

N
EXCAVATED AREA 4.8' x 10.0' TO AN AVERAGE
DEPTH OF 2.5' ON WEST SIDE OF E
MERIDIAN RD. CENTERED 10.0 x 10.0' EXCAVATION
ON 1/2" B&C # 21275

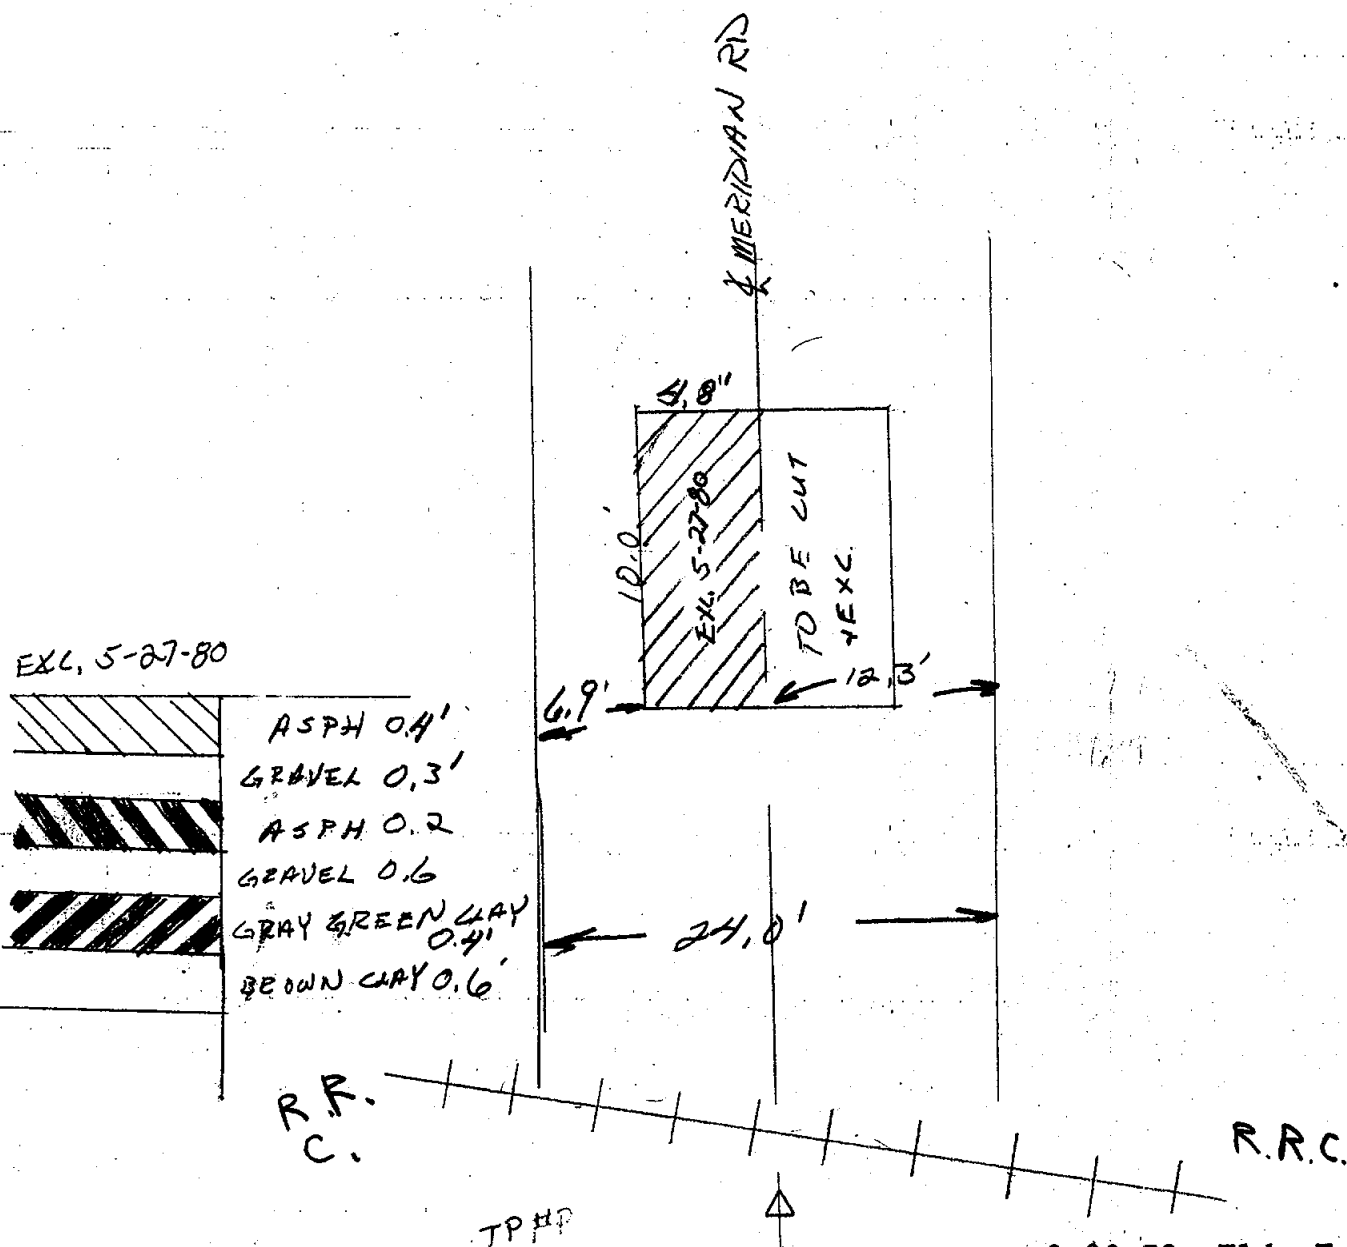


TECH. SUP'R. RON LESTER TOWNSHIP MERIDIAN
 COMPANY POLARIS CORNER CODE M-12
 FIELD SQUAD DALE & PLATT PAGE 1 OF 1 DATE 5-28-80

EXCAVATED AREA: 5.0' x 10.0' 50 SQ. FT.; AVG. DEPTH 2.5' SURFACE ASPH.

Sketch and describe roads, monuments found or set, and witnesses established:

EXCAVATED AREA OF 5.0' x 10.0' FD. RED ROCKS (SEE BELOW)
 IN S.E. CORNER OF EXCAVATION. EXCAVATED TO AN AVERAGE
 DEPTH OF 2.5'

RESET 1/2" BAR CAP & SET 1/2" BAR & TEMP CAP AT
 LOCATION OF MONUMENTATION FOUND.

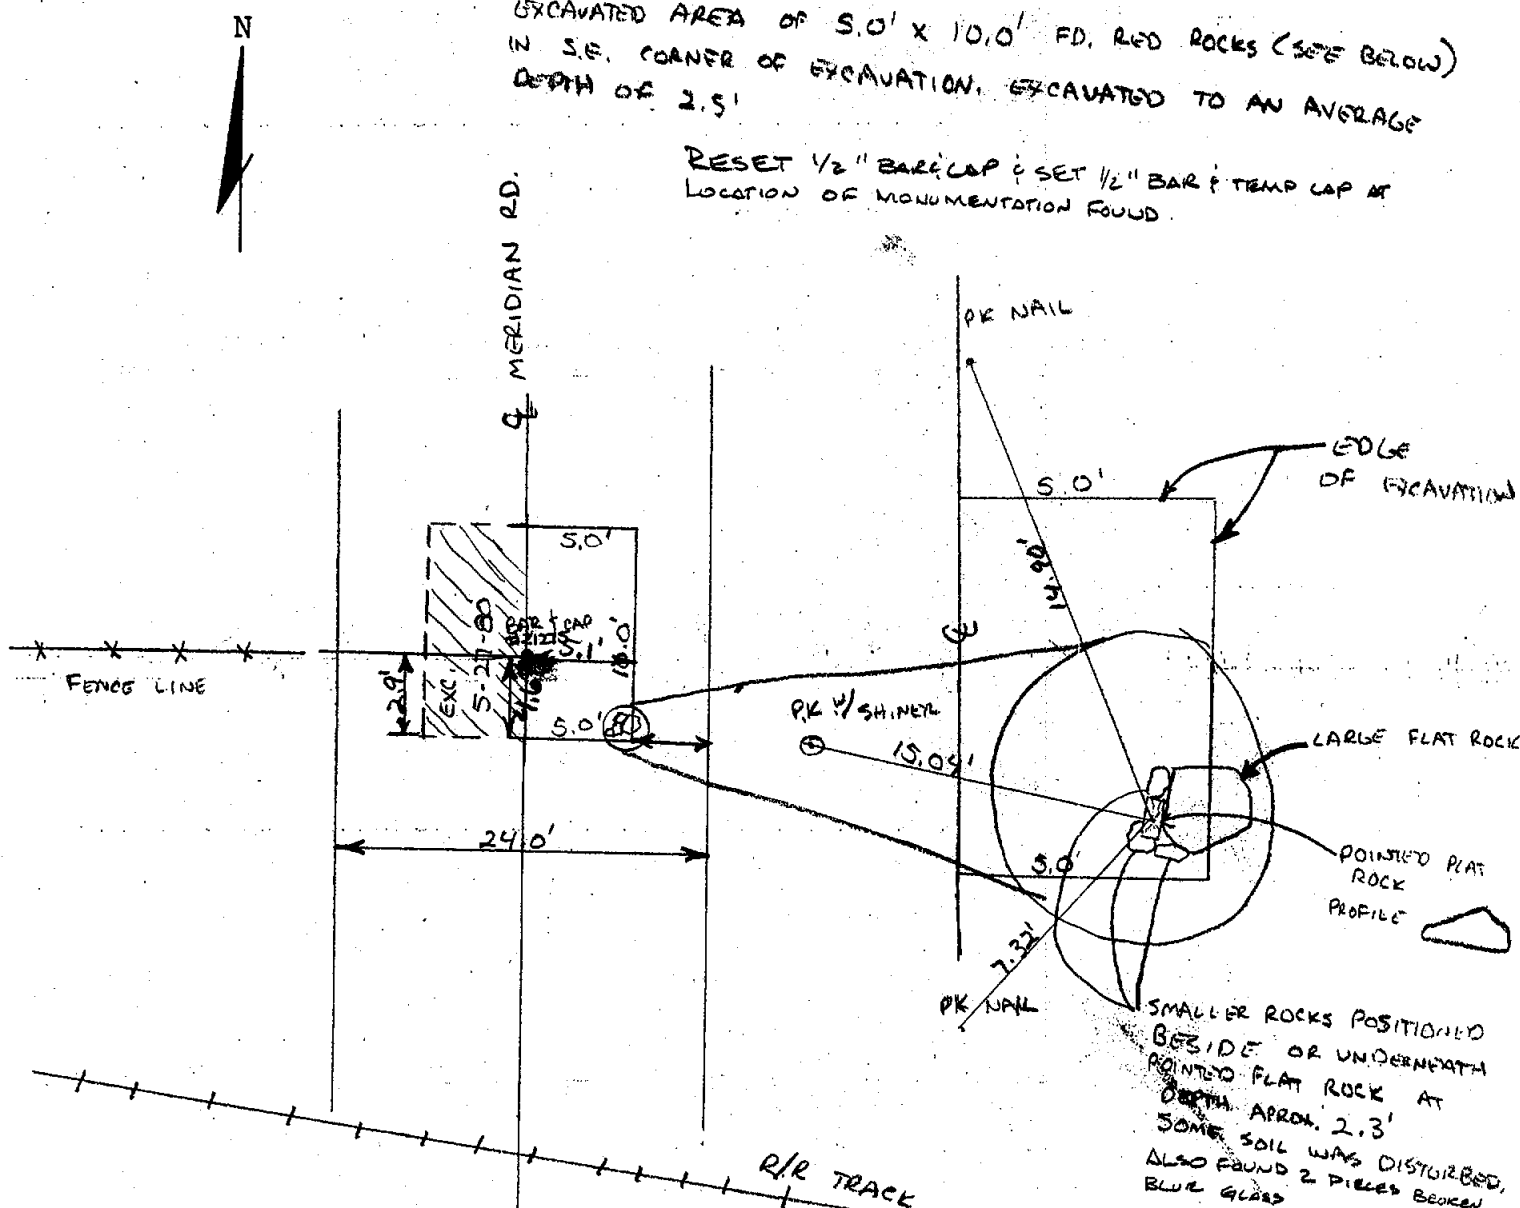


0.4'	ASPH.
0.3'	GRAVEL
0.2'	ASPH.
0.6'	GRAVEL
0.4'	GRAY-GREEN CLAY
0.6'	BROWN CLAY

Locate fence-stone - existing
 now to E R.R. South - see how
 it checks with 171' Re turn

MONUMENTED CORNER REPORT

TECH. SUP'R R LESTER TOWNSHIP MERIDIAN
 COMPANY POLARIS CORNER CODE M-12
 FIELD SQUAD PLATT RECORDED CORNER _____
 DATE 8-8-80 ROAD NAME MERIDIAN

Sketch, witness, and describe monuments found, and location relative to traverse point and centerline of road.

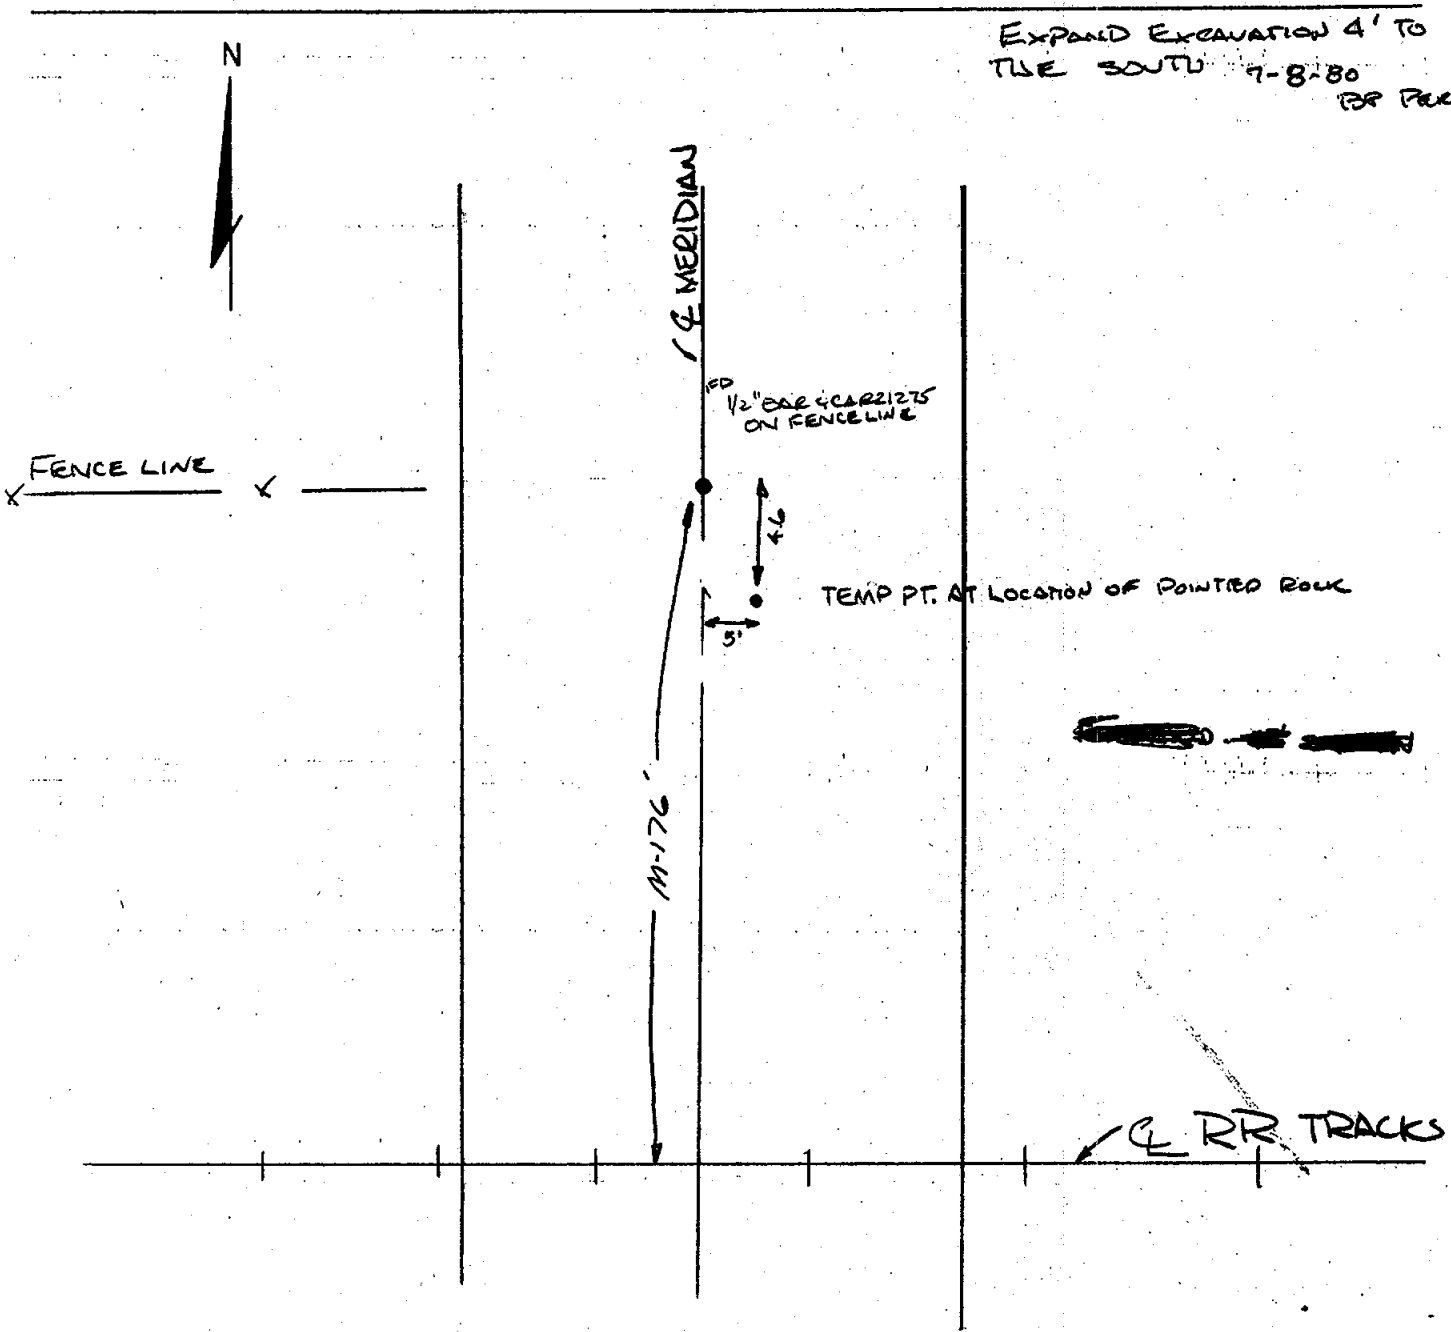


TECH. SUP'R. R. LESTER TOWNSHIP MERIDIAN
COMPANY POLARIS CORNER CODE M-12
FIELD SQUAD PLATT PAGE 1 OF 1 DATE 7-28-80


EXCAVATED AREA: 4x10 40 SQ. FT.; AVG. DEPTH 2.5 SURFACE ASP

Sketch and describe roads, monuments found or set, and witnesses established:

EXCAVATED ADDITIONAL 4x10' AREA, FOUND NO EVIDENCE.

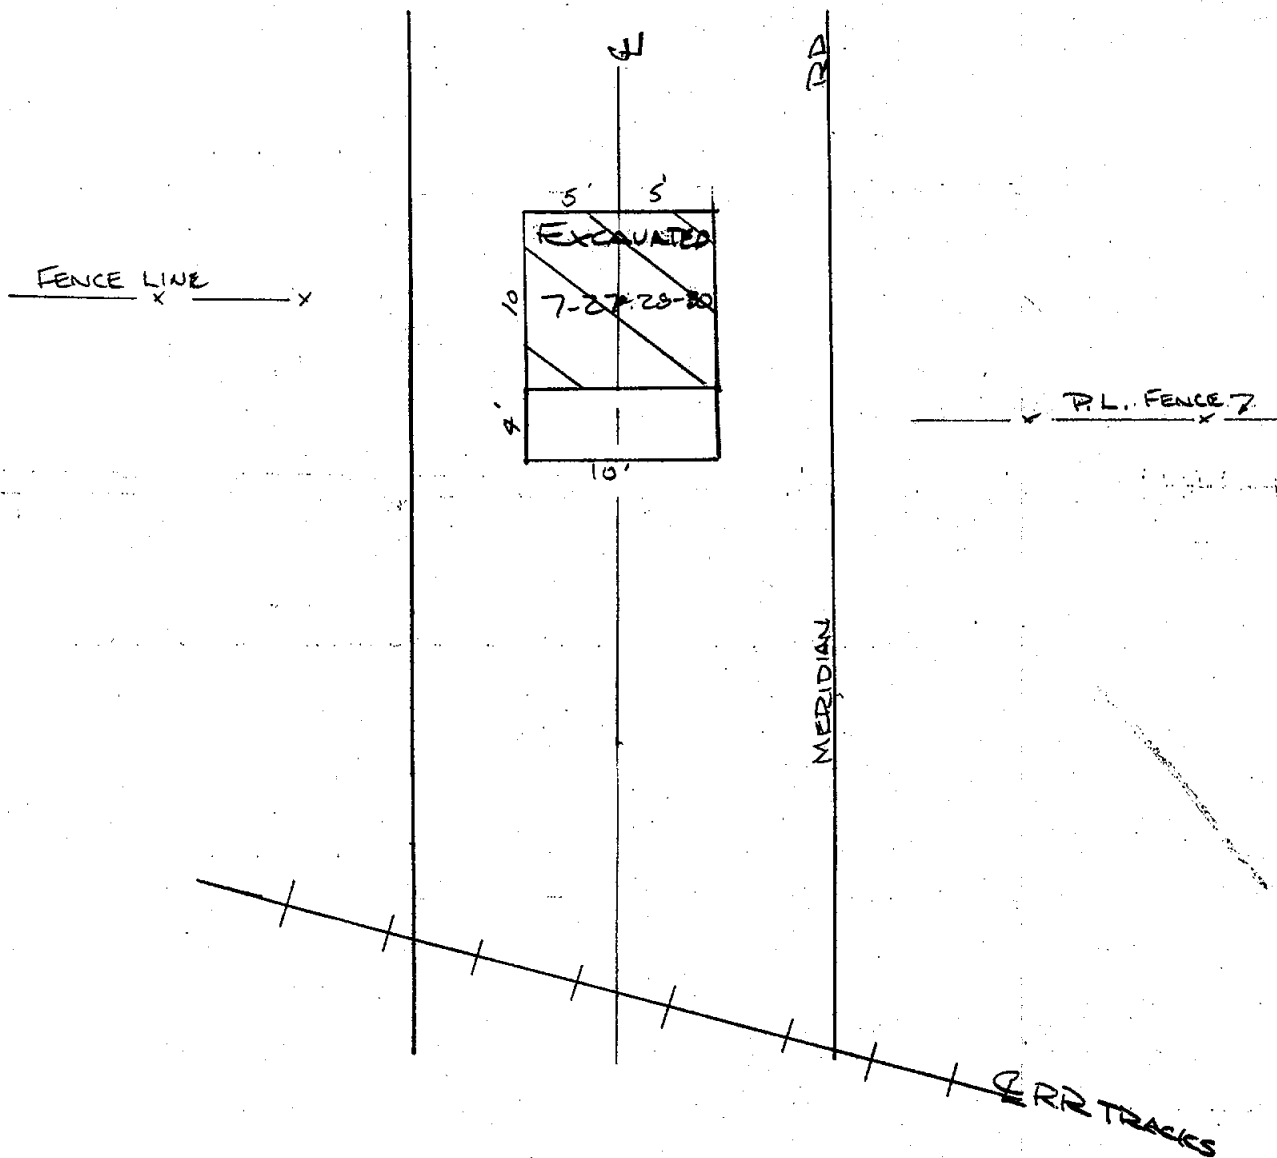

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

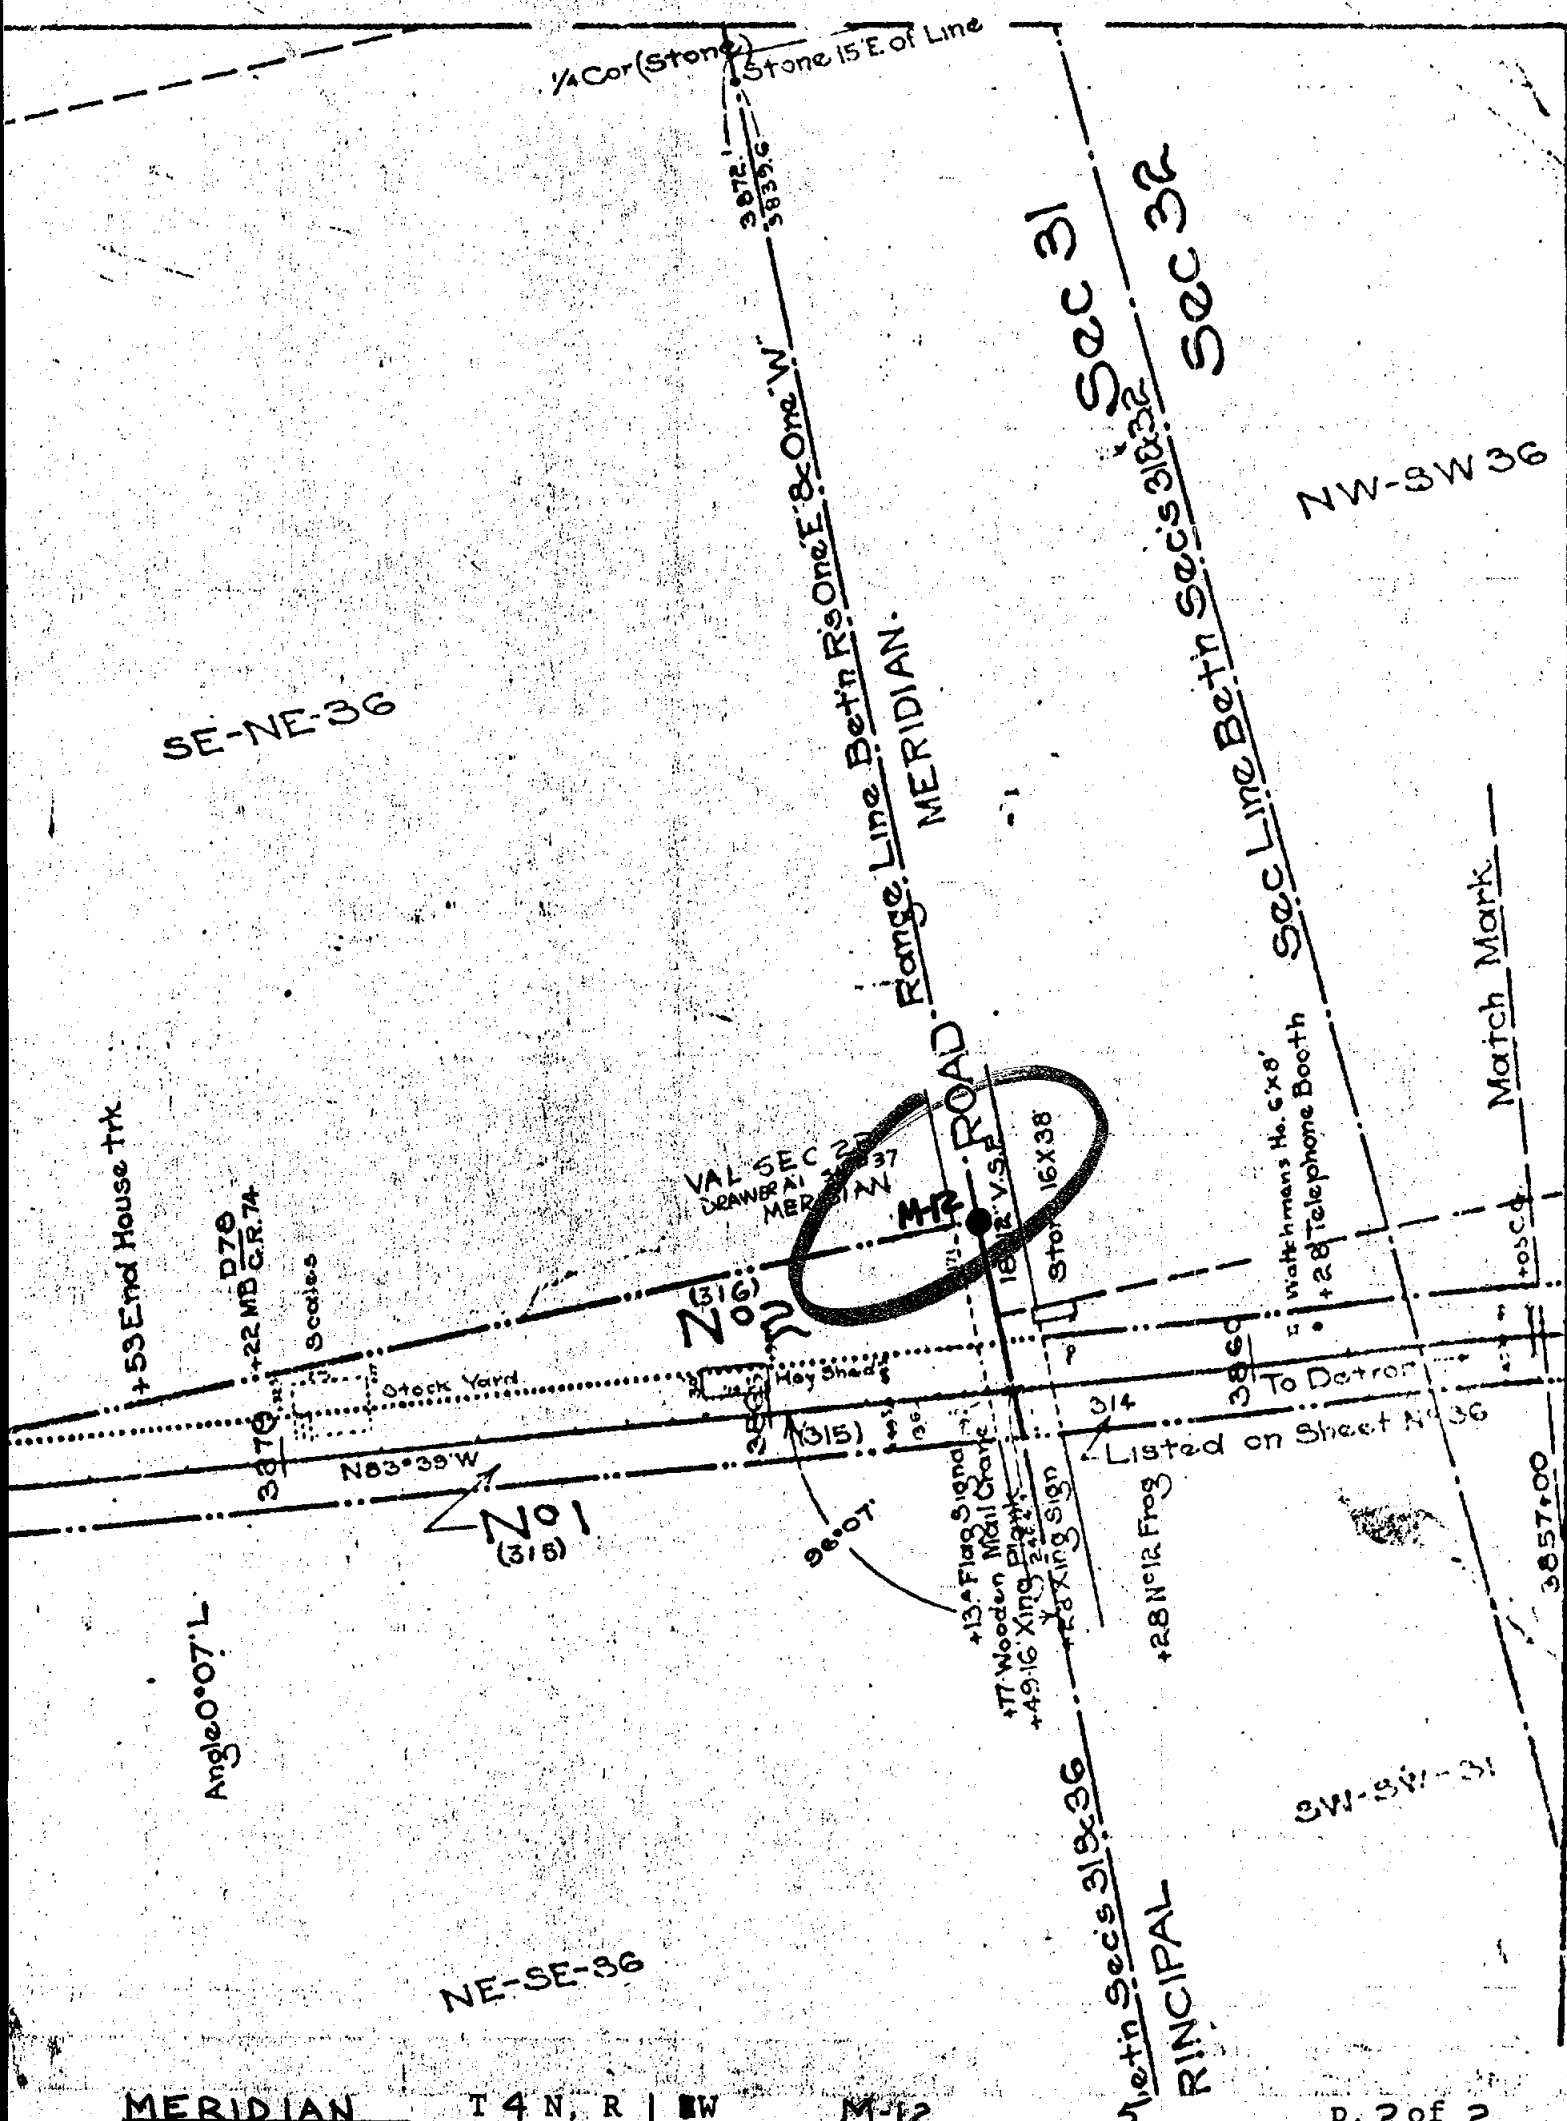

INGHAM COUNTY-ALAIEDON TWP.
LAND CORNER RECORDATION CERTIFICATE
FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF:-	LOCATED IN:-	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY_____ T. <u>3</u> N. <u>1</u> E. <u>1</u>		K-1
2. PROPERTY CONTROLLING IN SECTION_____ T. _____ S. R. _____ E. _____		
3. MISCELLANEOUS PROPERTY IN SECTION_____ T. _____ S. R. _____ E. _____		
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

LIBER 5 M 223

FILED

APR 23 2 15 PM '79

REGISTER OF DEEDS

Paula Johnson
INGHAM COUNTY, MICH.

REGISTER OF DEEDS STAMP AND
FILING NUMBER

I, Ronnie M. Lester, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on November 14, 1978, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____, 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:
K-1

Post set in original government survey by Musgrove Evans dated between December 18 and 23, 1826.

Corner referred to in a survey by T.J. Brown, County Surveyor, dated April 12, 1848 (v.C, p.17).

Corner identified as iron in records of Wm. Barryman, County Surveyor, date unknown and by MDSHT Government Monument Witness Form 280 dated May, 1959.

Corner identified as boatspike by MDSHT Government Monument Witness Form 280 March, 1967 and in the Ingham County Road Commission records, revised grid map, 1969.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:
K-1

Excavated a 8.4' x 10.7' hole to an average depth of 4.5' on the centerline of Jolly Road and west of centerline of Every Road. Found boat spike 0.3' below surface, + 1.0' south of the centerline of Jolly Road and + 5.0' west of the centerline of Every Road. Found 0.6' x 0.7' x 1.3' pointed stone shaped like a pyramid surrounded by 5 smaller rocks and many pieces of broken crockery at a depth of 2.9', on the centerline of Every Road and + 1.0' south of the centerline of Jolly Road. Accepted pointed stone as corner.

Excavation conducted by Ingham County Survey and Remonumentation Project crew.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-1

NE Corner, Section 2, T3N-R1W

Set 4" x 36" concrete monument with 1/2" x 38" rerod and cap #18998, and concrete collar with cap in location of pointed stone described above:

NE Corner of north headwall of concrete bridge, WNW, 39.22'

Nail & tag, #18998, west side 18" Hackberry, NE, 103.01'

Nail & tag, #16053, west side power pole, NE, 55.66'


Nail & tag, #18998, west side 26" Maple, SSE, 211.19'

SIGNED BY Ronnie M. Lester DATE April 4, 1979

SURVEYOR'S MICHIGAN REGISTRATION NO. 19998

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

SIGNED BY _____ DATE _____
APPROVED AND SIGNED BY James W. Lester DATE 4-20-79
DIRECTOR, Ingham County Survey and
Remonumentation Project
REGISTRATION NO. 17624

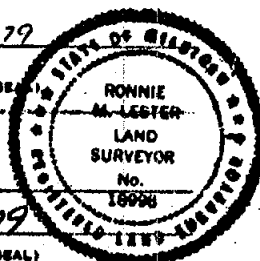

1606

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 20, 1971
REVISED MAY 14, 1976

MAY PLACE SKETCH ON BACK OR ATTACHED SHEET

L.5/P.223

K-1

INGHAM COUNTY - ALAIEDON TWP.

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970

FOR CORNERS OF--	LOCATED IN--	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY_____	T. <u>3</u> N. <u>X</u> , R. <u>1</u> W.	<u>L-1</u>
2. PROPERTY CONTROLLING IN SECTION_____	T. _____ N. _____ S. _____ R. _____ E. _____ W. _____	
3. MISCELLANEOUS PROPERTY IN SECTION_____	T. _____ N. _____ S. _____ R. _____ E. _____ W. _____	
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

LIBER

6 PG 71

FILED

AUG 4 11 22 AM '80

REGISTER OF DEEDS

Paula Johnson
INGHAM COUNTY, MICH.

REGISTER OF DEEDS STAMP AND
FILING NUMBER

I, Ronnie M. Lester, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on May 23, 1980, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____, 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

L-1

No post set in original government survey.
Corner referred to in a survey by T.J. Brown, Deputy County Surveyor,
April 12, 1846 (V.C., p.17).

L-1 B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

Excavated a 10' x 10' hole to an average depth of 3' on centerline of Jolly Road, + 14.0' west of fence line to the north and 3/4" pipe recorded as L-13 Meridian Township east. Found no evidence to re-establish corner. Corner considered lost. Corner set midway between northeast and northwest corners of Section 1 on Standard Township line. Measured east to M-1, 2657.95'; measured east to L-13, 17.37'; measured west to K-1, 2657.95'; measured west to K-13, 2646.45'. Monument falls in centerline of Jolly Road.
Excavation conducted by Ingham County Survey and Remonumentation Project crew.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

L-1

N $\frac{1}{2}$ Corner, Section 1, T3N-R1W
Set 4" x 36" concrete monument with $\frac{1}{2}$ " x 38" rerod and cap #18998 with concrete collar and cover in location described above:
Nail & tag, #16053, south side 14" Walnut, NE, 82.46'
Nail & tag, #18998, west side 10" Walnut, NNW, 71.44'
Nail & tag, #18998, southwest side 8" Twin-Elm, NW, 62.37'
MDSH nail & tag, northeast side power pole, SE, 81.40'
* 3/4" pipe, L-13 Meridian Twp., T4N-R1W, East, 17.37'


SIGNED BY

Ronnie M. Lester

DATE 7/31/80

SURVEYOR'S MICHIGAN REGISTRATION NO. 18998

~~MISSOURI STATE LAND SURVEYORS ASSOCIATION~~



CHIEF OF SURVEY PARTY


Gary D. Lester
MICHIGAN REGISTERED LAND SURVEYOR

Ingham County Survey and
Remonumentation Project

REGISTRATION NO. 17624

DATE

7-31-80



FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 28, 1971
REVISED MAY 14, 1975

MAY PLACE SKETCH ON BACK OR ATTACHED SHEET

1820

Lee
L-1 L-6/P. 71

Project: 960272 (remon)

List Nodes Report

Point #	North	East	Remonumentation Code
1	14438.1634	26243.8803	MR3-5-1-L9
2	14425.7701	24922.9419	MR3-8-2-int1
3	14418.8971	23601.4480	MR3-13-3-K9
4	11778.0407	23597.2587	MR3-14-4-K10
5	9120.0268	23631.6650	MR3-16-5-K11
6	6536.1232	28888.2960	MR3-18-6-M12
7	9198.1113	28890.5310	MR3-20-7-M11
8	9155.7113	26236.6938	MR3-21-8-L11
9	11818.4708	28891.1008	MR3-24-09-M10
10	11795.4765	26240.0419	MR3-28-10-L10
50	13735.5430	28398.2649	MR3-11-50
51	14216.0448	26095.8343	MR3-11-51
52	14492.6225	25156.0085	MR3-11-52
53	14748.8252	23783.0280	MR3-12-53
54	12812.5376	23522.5204	MR3-13-54
55	11902.2026	23537.3832	MR3-14-55
56	10330.7893	23576.4382	MR3-15-56
57	9242.2060	23586.2409	MR3-15-57
58	8773.2751	23610.3635	MR3-16-58
59	8033.2176	23473.6828	MR3-17-59
60	7606.9225	24902.9110	MR3-17-60
61	6799.1551	24940.4325	MR3-18-61
62	6345.6840	28864.9837	MR3-18-62
63	6981.7950	28903.1701	MR3-19-63
64	7733.8189	28889.6836	MR3-20-64
65	9252.6747	27529.6678	MR3-21-65
66	9226.8436	26343.3224	MR3-22-66
67	10467.3877	28910.3773	MR3-23-67
68	10381.0835	28892.8802	MR3-23-68-A11
69	12983.4111	28893.2208	MR3-24-69-C10
70	13520.1874	28842.6228	MR3-25-70
71	14074.3245	26726.8255	MR3-27-71
72	12111.8771	26386.3300	MR3-27-72
73	11785.2549	26301.5282	MR3-28-73
74	11481.7978	26207.6678	MR3-29-74
75	11217.2250	25659.8267	MR3-29-75
76	10761.2669	25261.4106	MR3-30-76
77	10829.0992	24899.4409	MR3-30-77
1002	14425.7701	24922.9419	CLOSE PT 2
1050	13735.5430	28398.2649	CLOSE PT 50

