

LIBER


6 PG 44

CERTIFIED BOUNDARY SURVEY

FOR: MARLENE LOVETTE

NORTH

1"=150'

LOCATION MAP
(NO SCALE)CENTER OF SECTION
25, T1N, R2W

EAST-WEST 1/4 LINE OF SECTION 25

EAST 1/4 CORNER
SECTION 25, T1N, R2W

RECORDED

FEB 26 12 28 PM '90

REGISTER OF DEEDS
Paula Johnson
INGHAM COUNTY, MICH.NORTH LINE OF THE
SOUTHWEST 1/4 OF THE
SOUTHEAST 1/4

N89°43'44"E 366.30'

1/2" BAR & CAP
#25832

±6.00 ACRES

87-B-16259

P.O.B.

S89°43'44"W 366.30'

WEST LINE OF THE EAST
1/2 OF THE SOUTHWEST 1/4
OF THE SOUTHEAST 1/4N00°07'00"W
597.68'

S00°05'24"E 2641.09'

EAST LINE OF SECTION 25

658.47'

EAST 2633.88'

SOUTH LINE SECTION 25 & OLD RD.

SOUTHEAST CORNER
SECTION 25, T1N, R2WSOUTH 1/4 CORNER
SECTION 25, T1N, R2W

LEGEND

- = SET 1/2" BAR WITH CAP
- = FOUND IRON AS NOTED
- = SURVEY BOUNDARY LINE
- = DISTANCE NOT TO SCALE

ALL DIMENSIONS ARE IN FEET
AND DECIMALS THEREOF.

IMPROVEMENTS NOT SHOWN

BRYAN LAND SURVEYS, P.C.

6019 Marsh Road

HASLETT, MICHIGAN 48840

Ph. (517) 399-1014

DRAWN BY

E J W

SECTION 25, T1N, R2W

FIELD WORK BY

R S

JOB NUMBER

SHEET

1 OF 2

89-B-27571

17.00

L6 p944

CERTIFICATE OF SURVEY:

I hereby certify only to the parties named hereon that we have surveyed a parcel of land within:

The East 366.3 feet of the West 1/2 of the Southwest 1/4 of the Southeast 1/4 of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan.

and that we have found or set, as noted hereon, permanent markers to all corners and angle points of the boundary of the parcel shown hereon and that the more particular legal description of said parcel is as follows:

A parcel of land in the Southeast 1/4 of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan; the surveyed boundary of said parcel described as commencing at the South 1/4 corner of said Section 25; thence East along the South line of said Section 25 a distance of 658.47 feet to the West line of the East 1/2 of the Southwest 1/4 of said Southeast 1/4; thence N00°07'00"W along said West line 597.68 feet to the point of beginning of this description; thence S89°43'44"W 366.30 feet; thence N00°07'00"W 713.52 feet to the North line of the Southwest 1/4 of said Southeast 1/4; thence N89°43'44"E along said North line 366.30 feet to said West line; thence S00°07'00"E along said West line 713.52 feet to the point of beginning; said parcel containing 6.00 acres more or less; said parcel subject to all easements and restrictions if any.

WITNESSES TO SECTION CORNERS:

Southeast corner Section 25, T1N, R2W, Liber 2, Page 207.

Found 1/2" bar in centerline of Olds road.

Found nail & tag Northeast side anchor post, South, 27.09'

Found nail & tag Southeast side 12" twin-Cherry, N15°E, 27.33'

Found nail & tag South side 20" Hickory, N70°W, 147.82'

South 1/4 corner section 25, T1N, R2W, Liber 6, Page 186.

Found monument in monument box 3' North of centerline Olds road.

Found nail & tag South side 16" Hickory, N70°E, 81.23'

Found nail & tag Northeast side 30" Cherry, S80°W, 154.33'

Set nail & tag North side 10" Maple, S65°W, 67.08'

East 1/4 corner Section 25, T1N, R2W, Liber 6, Page 273.

Found top large rock at intersection of fences to the North, South, East, and West.

Found nail & tag South side rail road tie fence post, West, 1.55'

Found nail & tag East side 8" Ash, N5°E, 25.76'

Found nail & tag West side 8" Ash, S5°W, 20.51'

Found rectangular iron with Notch in top, North, 6.8'

Center of Section 25, T1N, R2W, Liber 6, Page 364.

Set 1/2" bar & cap in East-West fence line on North-South 1/4 line

Set nail & tag South side 14" Elm, N85°W, 18.48'

Set nail & tag Southeast 12" Willow, N40°E, 27.97'

Set nail & tag Southeast side anchor post, S65°W, 22.61'

This survey was performed with an error of closure no greater than a ratio of 1 in 5000.0.

All bearings are derived from the South line of Section 25, which is assumed to bear East.

Larry A. Bryan 12-11-89
 Larry A. Bryan Date:
 Licensed Land Surveyor No. 25832



BRYAN LAND SURVEYS, P.C.

6019 Marsh Road

HASLETT, MICHIGAN 48840

Ph. (517) 339-1014

LIBRARY	G J W	SECTION 25, T1N, R2W
FIELD WORK	R S	JOB NUMBER:
SHEET 2 OF 2		89-B-27571



LIBER

5 pg 267

CERTIFIED BOUNDARY SURVEY



FOR: WILLIAM BYRUM

LOCATION MAP
(NO SCALE)CENTER OF SECTION
25, T1N, R2W

EAST-WEST LINE SECTION 25

EAST 1/4 CORNER
SECTION 25, T1N, R2W

N89°27'29"E 2635.60'

NORTH LINE OF THE
SOUTHWEST 1/4 OF
THE SOUTHEAST 1/4

N89°43'44"E 658.68'

WEST LINE OF THE
EAST 1/2 OF THE
SOUTHWEST 1/4 OF
THE SOUTHEAST 1/4EAST LINE OF THE
SOUTHWEST 1/4 OF
THE SOUTHEAST 1/4

NORTH

NORTH-SOUTH 1/4 LINE SECTION 25
N00°07'33"W 2816.16'

N00°07'33"W

N00°07'00"W 1311.20'

#19.84 ACRES

RECORDED

JUL 20 1 22 PM '87

REGISTER OF DEEDS
Paul Johnson
INGHAM COUNTY, MICH.

33' RIGHT-OF-WAY

P.O.B.

EAST 658.47'

658.47'

1316.94'

WEST

SOUTH LINE SECTION 25 & E OLDS RD.

SOUTHEAST CORNER
SECTION 25, T1N, R2WSOUTH 1/4 CORNER
SECTION 25, T1N, R2W

LEGEND

- = SET 1/2" BAR WITH CAP
- = SURVEY BOUNDARY LINE
- = DISTANCE NOT TO SCALE
- ALL DIMENSIONS ARE IN FEET AND DECIMALS THEREOF.
- IMPROVEMENTS NOT SHOWN
- = FENCE

3195

BRYAN LAND SURVEYS, P.C.

6019 Marsh Road

HASLETT, MICHIGAN 48840

Ph. (517) 339-1014

DRAWN BY G J W

SECTION 25, T1N, R2W

FIELD WORK BY M M

JOB NUMBER:

SHEET 1 OF 2

87-B-16259

LS pg 267

CERTIFICATE OF SURVEY:

I hereby certify only to the parties named hereon that we have surveyed at the direction of said parties, a parcel of land previously described as:

The East 1/2 of the Southwest 1/4 of the Southeast 1/4 of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan.

and that we have found or set, as noted hereon, permanent markers to all corners and angle points of the boundary of said parcel and that the more particular legal description of said parcel is as follows:

A parcel of land in the Southeast 1/4 of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan; the surveyed boundary of said parcel described as beginning at the South 1/4 corner of said Section 25; thence East along the South line of said Section 25 a distance of 658.47 feet to the point of beginning of this description; thence N00°07'00"W along the West line of the East 1/2 of the Southwest 1/4 of said Southeast 1/4 a distance of 1311.20 feet, thence N89°43'44"E along the North line of the Southwest 1/4 of said Southeast 1/4 a distance of 658.68 feet; thence S00°06'28"E along the East line of the Southwest 1/4 of said Southeast 1/4 a distance of 1314.31 feet to the South line of said Section 25; thence West along said South line 658.47 feet to the point of beginning; said parcel containing 19.84 acres more or less including 0.49 acre more or less presently in use as public right of way; said parcel subject to all easements and restrictions of record.

WITNESSES:

Southeast corner Section 25, T1N, R2W

Found 1/2" bar in centerline of Olds Road, Liber 2, Page 207

Found nail & tag Northeast side anchor post, South, 27.09'

Found nail & tag Southeast side 12" twin-Cherry, N15°E, 27.33'

Found nail & tag South side 20" Hickory, N70°W, 147.82'

South 1/4 corner section 25, T1N, R2W

Found monument in monument box 3' North of centerline Olds road.

Found nail & tag South side 16" Hickory, N70°E, 81.23'

Found nail & tag Northeast side 30" Cherry, S80°W, 154.33'

Set nail & tag North side 10" Maple, S65°W, 67.08'

East 1/4 corner Section 25, T1N, R2W

Found top large rock at intersection of fences to the North, South, East, and West.

Found nail & tag South side rail road tie fence post, West, 1.55'

Found nail & tag East side 8" Ash, N5°E, 25.76'

Found nail & tag West side 8" Ash, S5°W, 20.51'

Found rectangular iron with Notch in top, North, 6.8'

Center of Section 25, T1N, R2W

Set 1/2" bar & cap in East-West fence line on North-South 1/4 line

Set nail & tag South side 14" Elm, N85°W, 18.48'

Set nail & tag Southeast 12" Willow, N40°E, 27.97'

Set nail & tag Southeast side anchor post, S65°W, 22.61'

This survey was performed with an error of closure no greater than a ratio of 1 in 202,432.

All bearings are derived from the South line of Section 25, which is assumed to bear East.

Larry A. Bryan Date: 6-5-87
Lic. No. 25832



3195

BRYAN LAND SURVEYS, P.C.

6019 Marsh Road

HASLETT, MICHIGAN 48840

Ph. (517) 339-1014

DRAWN BY	G J W	SECTION	25, T1N, R2W
FIELD WORK BY	M M	JOB NUMBER:	
SHEET	2 OF 2		97-B-16259

CERTIFICATE OF SURVEY




SCALE: 1" = 400'

DEC 23 10 58 AM '94

 REGISTER OF DEEDS
Frank J. Johnson
 TNGHAM COUNTY, MICH.

RECORDING SPACE

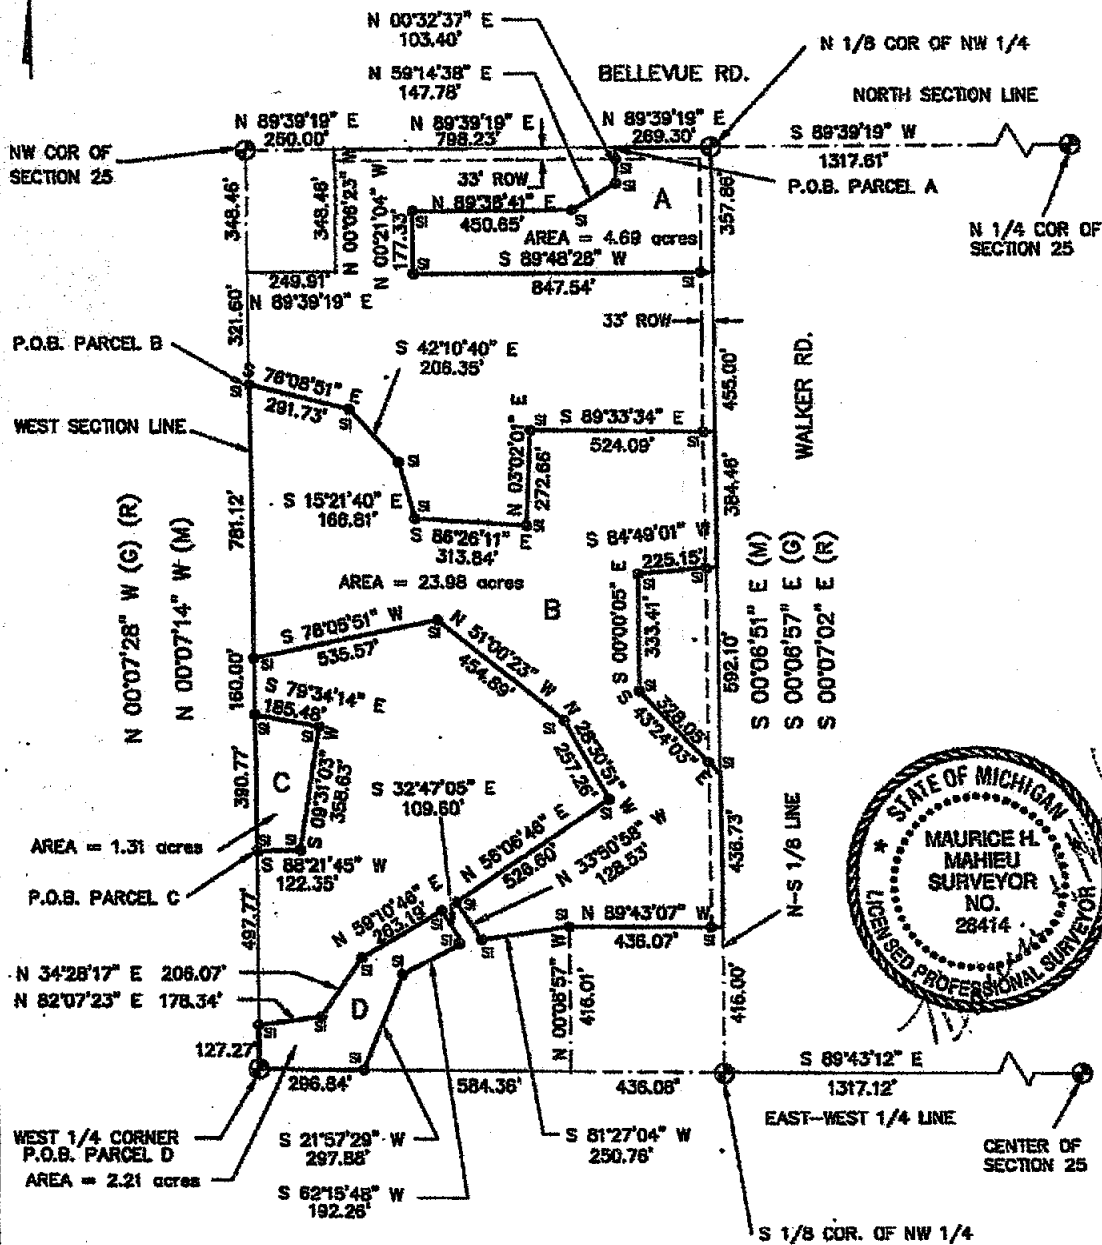

(G) = AS SHOWN ON GRANGER ASSOCIATES SURVEY LIBER 7, PG 79

LEGEND

ALL DIMENSIONS ARE IN FEET AND DECIMALS THEREOF
 D= DEEDED
 P= PLATTED
 M= MEASURED
 PROPERTY CORNER IRON
 CONCRETE MONUMENT
 FENCE LINE

F= FOUND IRON
 S= SET IRON



4575



WOLVERINE ENGINEERS & SURVEYORS, INC.
 312 NORTH ST. MASON, MICHIGAN 48854
 PHONE (317) 876-9200


SURVEY FOR: ONONDAGA TWP. SECTION 25

FIELD SURVEY: T. YOUNG DATE: 12/1/94

DRAWN BY: D. MILLER SHEET: 1 OF 2

SCALE: 1" = 400' JOB NO.: 940597

CERTIFICATE OF SURVEY



RECORDING SPACE

LEGAL DESCRIPTION

PARCEL A

A part of the West 1/2 of the Northwest 1/4 of Section 25, T1N, R2W, Onondaga Twp., Ingham Co., Michigan described as beginning on the North Section Line at a point N 89°39'19" E 1048.23 feet from the Northwest corner; thence N 89°39'19" E 259.30 feet along the North Section Line to the North 1/8 corner of the Northwest 1/4; thence S 00°06'51" E 357.86 feet along the North-South 1/8 Line; thence S 89°48'26" W 847.54 feet; thence N 00°21'04" W 177.33 feet; thence N 89°38'41" E 450.65 feet; thence N 59°14'38" E 147.78 feet; thence N 00°32'37" E 103.40 feet to the Point of Beginning containing 4.69 acres of land more or less and subject to any rights of way or easements of record.

PARCEL B

A part of the West 1/2 of the Northwest 1/4 of Section 25, T1N, R2W, Onondaga Twp., Ingham Co., Michigan described as beginning on the West Section Line at a point S 00°07'14" E 670.05 feet from the Northwest corner; thence S 76°08'51" E 291.73 feet; S 42°10'40" E 206.35 feet; thence S 15°21'40" E 166.81 feet; thence S 89°26'11" E 313.84 feet; thence N 03°02'01" E 272.65 feet; thence S 89°33'34" E 524.09 feet; thence S 00°06'51" E 384.48 feet along the North-South 1/8 Line of the Northwest 1/4; thence S 89°49'01" E 225.15 feet; thence S 00°00'05" W 333.41 feet; thence S 43°23'03" E 328.05 feet; thence S 00°06'51" E 436.73 feet along the North-South 1/8 Line of the northwest 1/4; thence N 89°43'07" W 436.07 feet; thence S 81°27'04" W 250.76 feet; thence N 33°50'58" W 128.53 feet; thence N 58°06'48" E 526.60 feet; thence N 28°30'51" W 257.26 feet; thence N 51°00'23" W 454.89 feet; thence S 78°05'51" W 535.57 feet; thence N 00°07'14" W 781.12 feet along the West Section Line to the Point of Beginning containing 23.98 acres of land more or less and subject to any rights of way or easements of record.

PARCEL C

A part of the West 1/2 of the Northwest 1/4 of Section 25, T1N, R2W, Onondaga Twp., Ingham Co., Michigan described as beginning on the West Section Line at a point N 00°07'14" W 625.04 from the West 1/4 corner; thence N 00°07'14" W 390.77 feet along the West Section Line; thence S 78°34'14" E 185.48 feet; thence S 09°31'03" E 358.63 feet; thence S 88°21'45" W 122.35 feet; to the Point of Beginning containing 1.31 acres of land more or less and subject to any rights of way or easements of record.

PARCEL D

A part of the West 1/2 of the Northwest 1/4 of Section 25, T1N, R2W, Onondaga Twp., Ingham Co., Michigan described as beginning at the West 1/4 corner; thence N 00°07'14" W 127.27 feet along the West Section Line; thence N 82°07'23" E 178.34 feet; thence N 34°28'17" E 206.07 feet; thence N 59°10'48" E 283.19 feet; thence S 32°47'05" E 109.60 feet; thence S 62°15'48" W 192.25 feet; thence S 21°57'29" W 297.88 feet; thence N 89°43'12" W 296.84 feet along the East-West 1/4 Line to the Point of Beginning containing 2.21 acres of land more or less and subject to any rights of way or easements of record.

WITNESSES TO GOVERNMENT CORNERS

NW Corner of Section 25

Found 3/4" iron rod w/cap #28409
N&T #28409 W.side 36" sumac, S 20° E 35.10'
N&T #28409 S.side 20" maple, N 50° E 48.06'
N&T #28409 E.side 20" maple, N 20° W 65.90'
Iron rod, south 8.57'

N 1/8 Corner, NW 1/4 of Section 25

Found 1/2" iron rod
N&T #28414 S.side 36" oak, N 30° E 34.86'
N&T #28414 S.side 10" elm, N 65° E 71.55'
N&T #28414 S.side 12" poplar, N 75° W 80.90'
N&T #28414 W.side utility pole, S 20° E 75.55'

S 1/8 Corner, NW 1/4 of Section 25

Set 1/2" iron rod w/cap #29414
N&T #28414 N.side utility pole, S 80° E 33.75'
N&T #28414 W.side 24" maple, S 45° E 81.60'
N&T #28414 E.side 10" cherry, N 20° W 62.20'
NW cor. Block found, garage, S 85° E 91.05'

N 1/4 Corner Section 25

Found well point w/cap #28409
N&T #18998, NE.side utility pole, S 45° E 104.94'
N&T #28414 S.side 10" elm, N 75° E 69.12'
W.edge "L" shaped fence post, N 45° E 26.40'
SE.edge "L" shaped fence post, N 40° E 35.25'

I hereby certify that I have surveyed and mapped the land platted and/or described on November 18, 1994, and that the ratio of closure on the unadjusted field observation of such survey was 1/15,000 and that all the requirements of P.A. 132, 1970 have been complied with.

Maurice H. Mahieu P.S. #28414

LEGEND

ALL DIMENSIONS ARE IN FEET AND DECIMALS THEREOF
D= DECEDED
P= PLATTED
M= MEASURED
PROPERTY CORNER IRON
CONCRETE MONUMENT
FENCE LINE

FI= FOUND IRON
SI= SET IRON

4575



WOLVERINE ENGINEERS & SURVEYORS, INC.
312 NORTH ST. MASON, MICHIGAN 48854
PHONE (517) 676-9200

SURVEY FOR: ONONDAGA TWP. SECTION 25

FIELD SURVEY: T. YOUNG DATE: 12/1/94


DRAWN BY: D. MILLER SHEET: 2 OF 2

SCALE: 1" = 400' JOB NO.: 940597


LIBER

5 pg 267


CERTIFIED BOUNDARY SURVEY



FOR WILLIAM BYRUM

LOCATION MAP
(NO SCALE)CENTER OF SECTION
25, T1N, R2W

EAST-WEST LINE SECTION 25

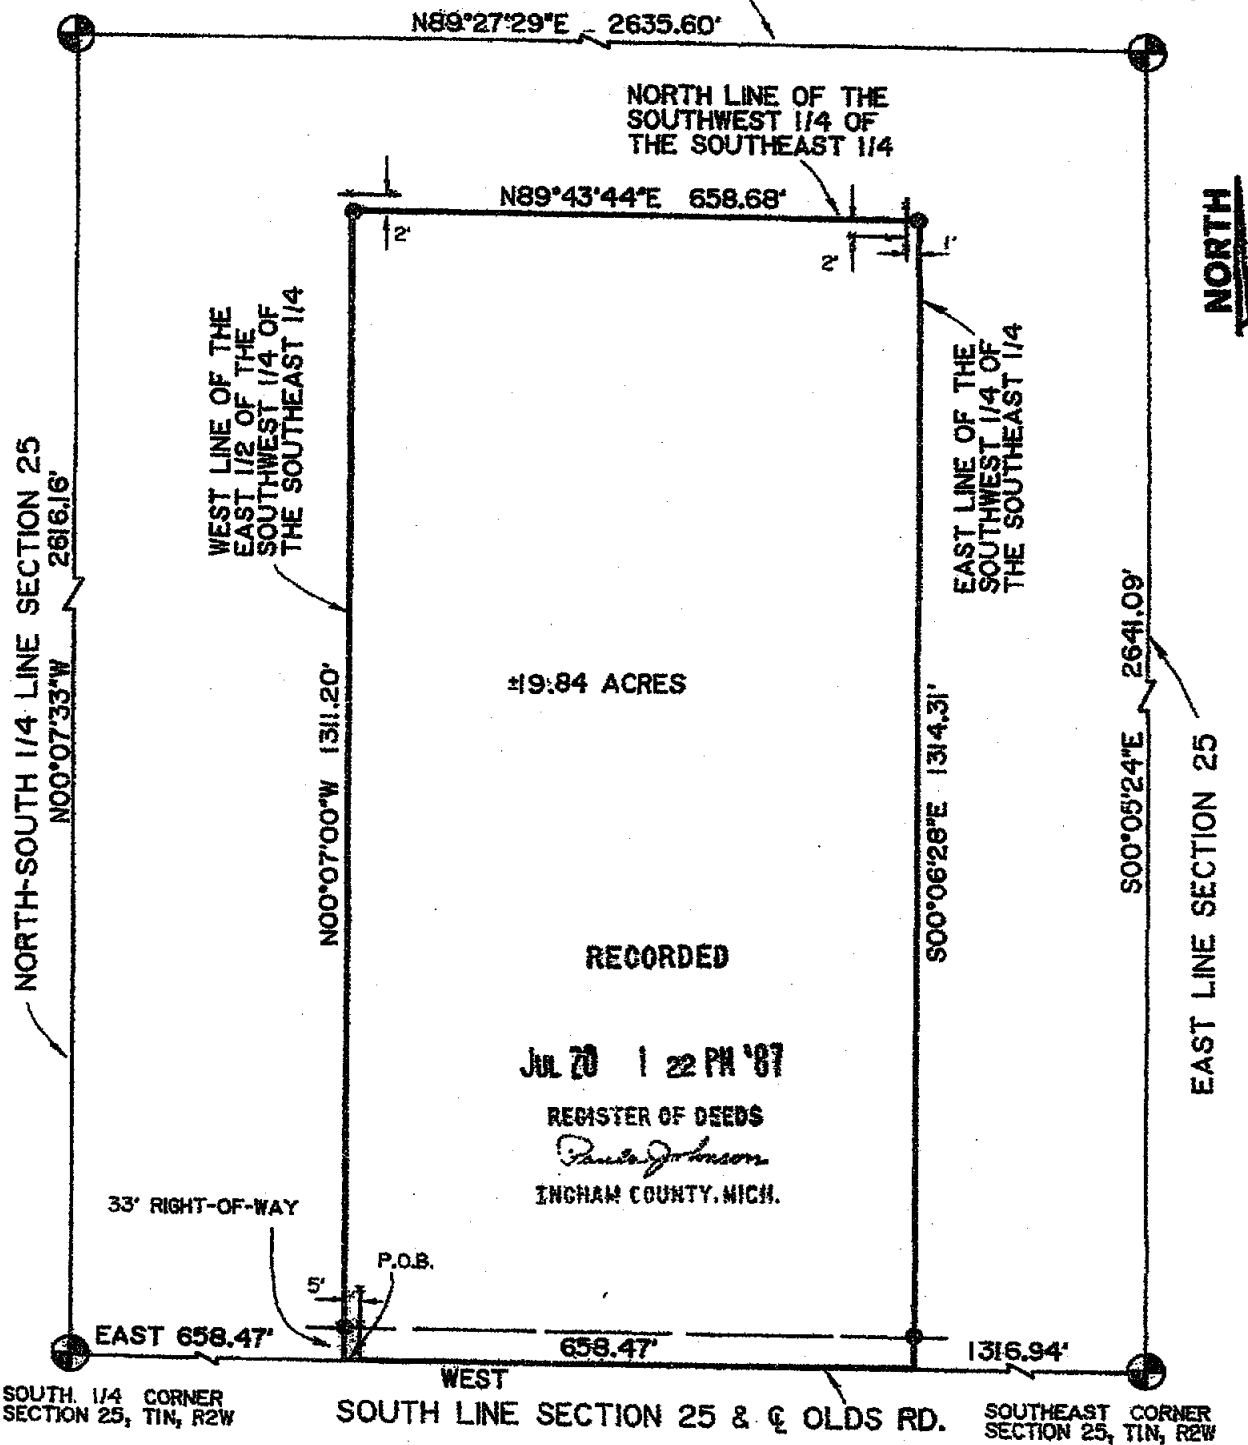EAST 1/4 CORNER
SECTION 25, T1N, R2W

LEGEND

- = SET 1/2" BAR WITH CAP
- = SURVEY BOUNDARY LINE
- = DISTANCE, NOT TO SCALE
- ALL DIMENSIONS ARE IN FEET AND DECIMALS THEREOF.
- IMPROVEMENTS NOT SHOWN
- = FENCE

3195

BRYAN LAND SURVEYS, P.C.

6019 Marsh Road

HASLETT, MICHIGAN 48840

Ph. (517) 339-1014

DRAWN BY G J W

SECTION 25, T1N, R2W

FIELD WORK BY M M

JOB NUMBER:

SHEET 1 OF 2

87-B-16259

LIBER

1 PG 687

CERTIFICATE OF SURVEY

RECORDED

Ned Baldwin

APR 18 2 03 PM '73

REGISTER OF DEEDS

Paul M. Lewis

Legal Description: That part of the West 25 1/2 acres of the NE 1/4 of the NW 1/4 of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan, described as:

PARCEL NO. 1 - Beginning on the North line of said Section 25 at a point 1317.54 feet East of the NW corner of Section 25, T1N, R2W, said point being the NW corner of the NE 1/4 of the NW 1/4 of Section 25; thence East 550.00 feet on the North line of Section 25; thence S00°10'30"W, 396.25 feet; thence West 550.00 feet; thence N00°10'30"E, 396.25 feet on the west line of said NE 1/4 of NW 1/4 of Section 25 to the point of beginning. (5.00 acres)

PARCEL NO. 2 - Commencing at the NW corner of Section 25, T1N, R2W, thence East 1317.54 feet on the North line of Section 25, and S00°10'30"W, 396.25 feet on the West line of the NE 1/4 of the NW 1/4 of Section 25 to the point of beginning of the following described parcel of land; thence East, 550.00 feet; thence S00°10'30"W, 396.25 feet; thence West, 550.00 feet; thence N00°10'30"E, 396.25 feet on the West line of the NE 1/4 of the NW 1/4 of Section 25 to the point of beginning. (5.00 Acres)

PARCEL NO. 3 - Commencing at the NW corner of Section 25, T1N, R2W, thence East 1317.54 feet on the North line of Section 25 and 792.50 feet S00°10'30"W on the West line of the NE 1/4 of the NW 1/4 of Section 25 to the point of beginning of the following described parcel of land; thence East, 836.62 feet; thence S00°27'46"W, 521.50 feet on the East line of said West 25 acres of the NE 1/4 of NW 1/4 of Section 25; thence West 834.00 feet on the South line of the NE 1/4 of NW 1/4 of Section 25; thence N00°10'30"E, 521.50 feet on the West line of said NE 1/4 of NW 1/4 of Section 25 to the point of beginning. (10.003 Acres)

PARCEL NO. 4 - Beginning on the North line of said Section 25 at a point 1867.54 feet East of the NW corner of Section 25, T1N, R2W, thence East 290.6 feet on the North line of Section 25; thence S00°27'45"W, 792.52 feet on the East line of said West 25 acres of the NE 1/4 of the NW 1/4 of Section 25; thence West 286.62 feet; thence N00°10'30"E, 792.50 feet to the point of beginning. (5.25 Acres)


We hereby certify that we have fully complied with the requirements of Section 3, Public Act 132 of 1970, and that the ratio of error of closure of this survey is no greater than 1/5000.

We further certify that we have surveyed the property herein described.

FRED WHITE ENGINEERING COMPANY
2300 North Grand River Avenue
Lansing, Michigan 48906
Phone: 517 AC 371-1111

Fred N. White
Fred N. White, P.E. & R.L.S.
Survey No. 728885
Date: September 15, 1972



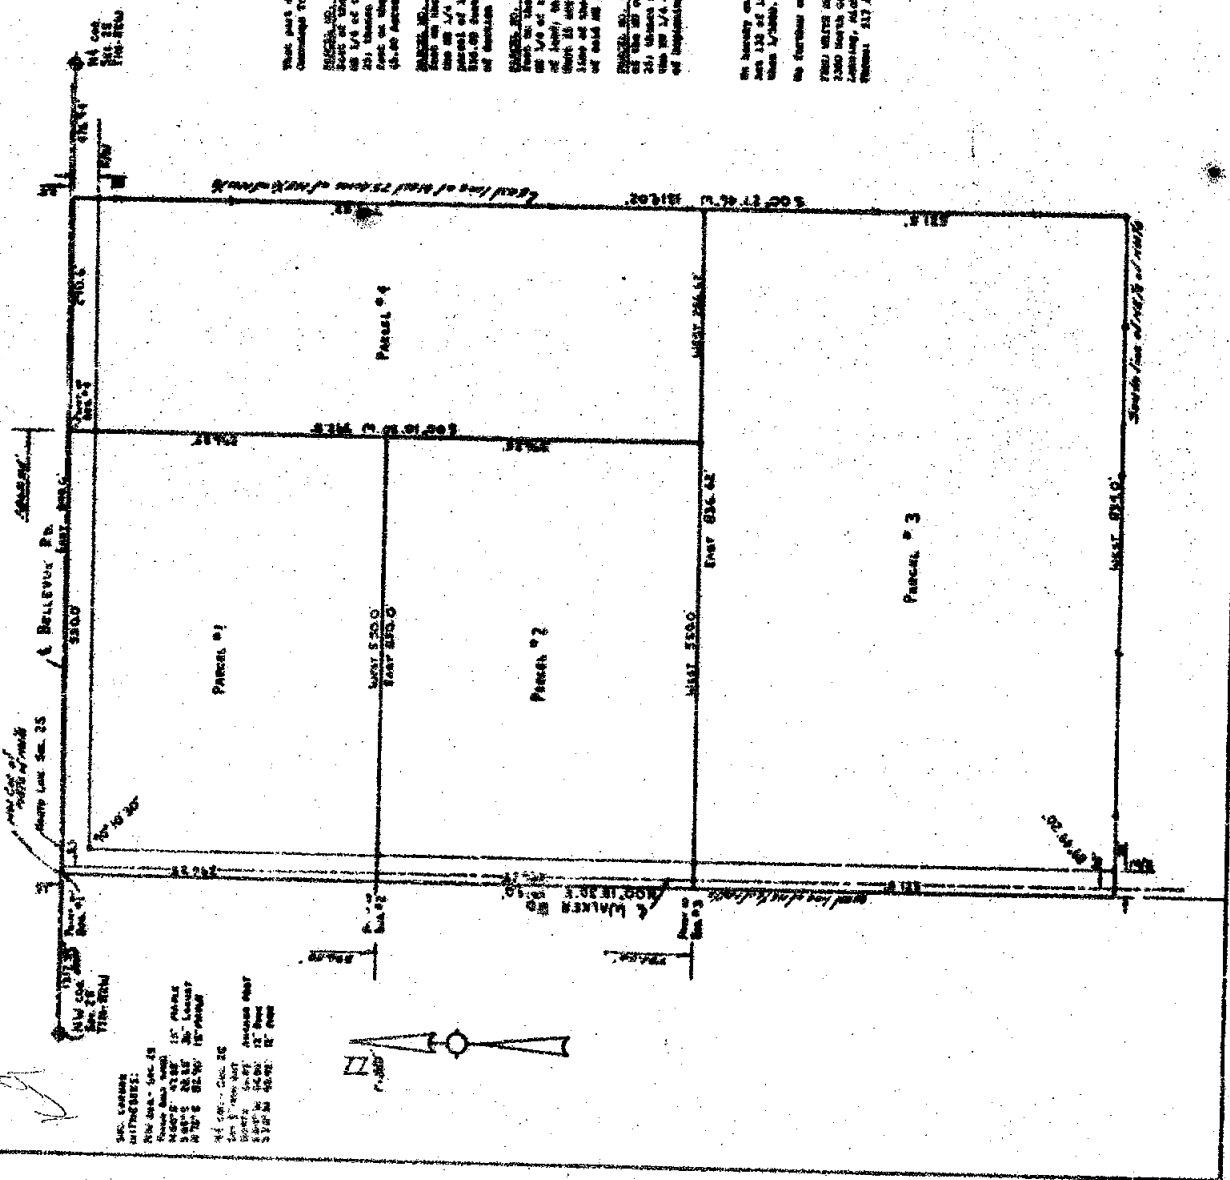

DESCRIPTION OF PARCELS

Legal Description

That part of the West 1/2 of the NW 1/4 of the NW 1/4 of Section 25, T18N, R18W, Champaign Township, Champaign County, Illinois, described as:

PARCEL NO. 1 - Beginning on the north line of said Section 25 at a point 137.24 feet East of the West corner of Section 25, T18N, R18W, said point being the NE corner of the NW 1/4 of the NW 1/4 of Section 25; thence East 505.00 feet on the north line of Section 25 thence South 10° 10' 30" W, 25.25 feet; thence West 500.00 feet; thence South 10° 10' 30" W, 25.25 feet on the West line of said NW 1/4 of Section 25 to the point of beginning. (1.00 Acres)

PARCEL NO. 2 - Commencing at the NW corner of Section 25, T18N, R18W, thence East 137.24 feet on the North line of Section 25, thence South 10° 10' 30" W, 25.25 feet on the West line of the NW 1/4 of the NW 1/4 of Section 25 to the point of beginning of the following described parcel; thence East 505.00 feet; thence South 10° 10' 30" W, 25.25 feet; thence West 500.00 feet; thence South 10° 10' 30" W, 25.25 feet on the West line of the NW 1/4 of the NW 1/4 of Section 25 to the point of beginning. (1.00 Acres)

PARCEL NO. 3 - Commencing at the NW corner of Section 25, T18N, R18W, thence East 137.24 feet on the North line of Section 25, thence South 10° 10' 30" W, 25.25 feet on the West line of the NW 1/4 of the NW 1/4 of Section 25 to the point of beginning of the following described parcel; thence East 505.00 feet; thence South 10° 10' 30" W, 25.25 feet; thence West 500.00 feet; thence South 10° 10' 30" W, 25.25 feet on the West line of the NW 1/4 of the NW 1/4 of Section 25 to the point of beginning. (1.00 Acres)

We hereby certify that we have fully complied with the requirements of Section 3, Public Act 12 of 1879, and that the title of acre of this survey is as stated.

No further attestation that we have surveyed the property herein described.

FRED N. WHITE SURVEYING COMPANY
2200 North Grand Avenue
Chicago, Illinois 60614
Survey No. 722205
Date: September 15, 1972



BY ORDER OF THE BOARD	BY ORDER OF THE BOARD
RECORD BOOK	RECORD BOOK
PROPERTY Surveyed for the ACTUALLY MET	PROPERTY Surveyed for the ACTUALLY MET
of the NW 1/4 of the NW 1/4 of Sec. 25, T18N, R18W	of the NW 1/4 of the NW 1/4 of Sec. 25, T18N, R18W
Champaign Twp., Champaign Co., Illinois	Champaign Twp., Champaign Co., Illinois
FRED WHITE ENGINEERING COMPANY, INC.	FRED WHITE ENGINEERING COMPANY, INC.
CHICAGO, ILL. 60614	CHICAGO, ILL. 60614
DATE: SEP 15, 1972	DATE: SEP 15, 1972
NO. 557	NO. 557



FAUSER & KELLER, INC.

— REGISTERED LAND SURVEYORS —

2567 W. Baseline Road


Office: (517) 783-4717

Leslie, Michigan 48251

589-3261 Leslie
GLEN A. FAUSER, R.L.S.

Mona Smith
3900 W. Bellevue
Leslie, Michigan 49251

563-2812 Hanover
RONALD W. KELLER, R.L.S.
February 14, 1979

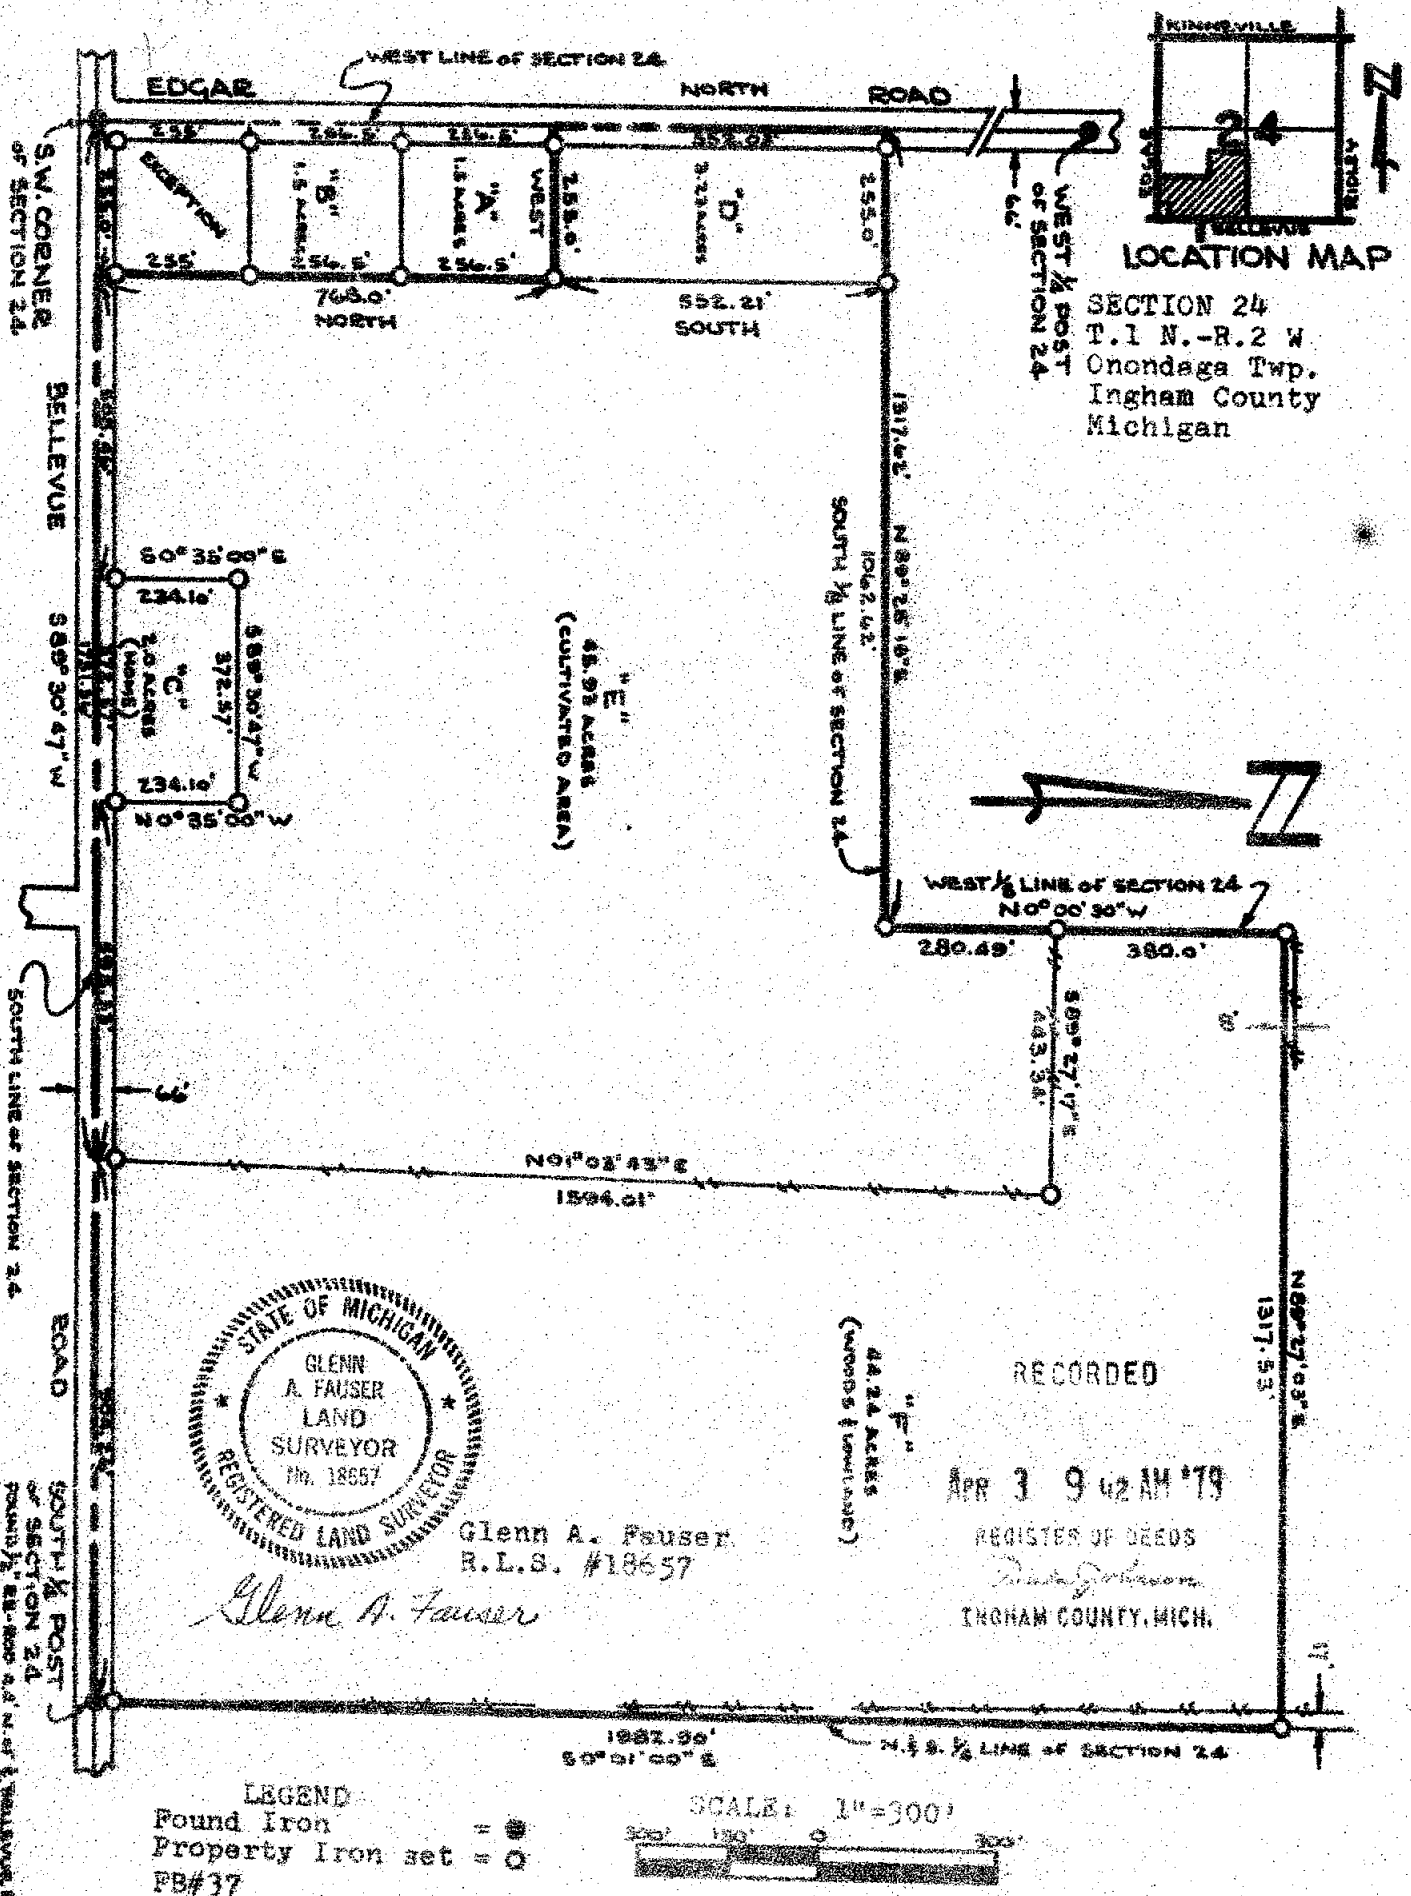

FOURTH, 22-1000 4 2 7 1/2' E. WALLACE RD. 57-200
FENCE CORNER 45.00' 57-100
NORTH 12' CORNER 45.00'
S 3/4 W 14' CORNER 45.00'
S 3/4 E NE CORNER 45.00' 57-200

2019

I hereby certify this drawing to have been prepared from the field notes of a boundary survey made by me on September 1978
on order of Mona Smith

This survey was made with HA 122 of 1970 and the error of closure is 1 ft. in 5400 ft.

FAUSER & KELLER, INC.

— REGISTERED LAND SURVEYORS —

2567 W. Baseline Road

Office: (517) 783-4717

Leslie, Michigan 49251

Mona Smith

3900 W. Bellevue

Leslie, Michigan 49251

Page 2 of 2

LIBER

3 PG 831

569-3261 Leslie

GLEN A. FAUSER, R.L.S.

SECTION 24

T.1 N.-R.2 W

Onondaga Township

Ingham County

Michigan

563-2812 Hanover

RONALD W. KELLER, R.L.S.

February 14, 1979

PARCEL "C"

DESCRIPTION: A parcel of land in the Southwest $\frac{1}{4}$ of Section 24, T.1 N.-R.2 W, Onondaga Township, Ingham County, Michigan, described as follows: To find the Place of Beginning of Parcel "C" commence at the Southwest corner of Section 24; thence N $89^{\circ}30'47''$ E along the South line of Section 24 a distance of 763.46ft. to the Place of Beginning of Parcel "C"; thence continuing N $89^{\circ}30'47''$ E along the South line of Section 24 a distance of 372.57ft.; thence N $0^{\circ}35'00''$ W 234.10ft.; thence S $89^{\circ}30'47''$ W 372.57ft.; thence S $0^{\circ}35'00''$ E 234.10ft. to the South line of Section 24 and the Place of Beginning of Parcel "C". Containing 2.0 acres.

PARCEL "D"

DESCRIPTION: A parcel of land in the Southwest $\frac{1}{4}$ of Section 24, T.1 N.-R.2 W, Onondaga Township, Ingham County, Michigan, described as follows: To find the Place of Beginning of Parcel "D" commence at the Southwest corner of Section 24; thence N $89^{\circ}30'47''$ E along the South line of Section 24 a distance of 255.0ft.; thence North 768.0ft. to the Place of Beginning of Parcel "D"; thence West 255.0ft. to the West line of Section 24; thence North along the West line of Section 24 a distance of 552.03ft.; thence N $89^{\circ}28'18''$ E 255.0ft.; thence South 552.21ft. to the Place of Beginning of Parcel "D". Containing 3.23 acres.

PARCEL "E"


DESCRIPTION: A parcel of land in the Southwest $\frac{1}{4}$ of Section 24, T.1 N.-R.2 W, Onondaga Township, Ingham County, Michigan, described as follows: To find the Place of Beginning of Parcel "E" commence at the Southwest corner of Section 24; thence N $89^{\circ}30'47''$ E along the South line of Section 24 a distance of 255.0ft. to the Place of Beginning of Parcel "E"; thence North 1320.21ft.; thence N $89^{\circ}28'18''$ E 1062.62ft. to the West $\frac{1}{8}$ line of Section 24; thence N $0^{\circ}00'30''$ W along the West $\frac{1}{8}$ line of Section 24 a distance of 280.49ft.; thence S $89^{\circ}27'17''$ E 443.34ft.; thence S $01^{\circ}03'43''$ W 1594.01ft. to the South line of Section 24; thence S $89^{\circ}30'47''$ W along the South line of Section 24 a distance of 595.33ft.; thence N $0^{\circ}35'00''$ W 234.10ft.; thence S $89^{\circ}30'47''$ W 372.57ft.; thence S $0^{\circ}35'00''$ E 234.10ft. to the South line of Section 24; thence S $89^{\circ}30'47''$ W along the South line of Section 24 a distance of 508.46ft. to the Place of Beginning of Parcel "E". Containing 45.93 acres.

PARCEL "F"

DESCRIPTION: A parcel of land in the Southwest $\frac{1}{4}$ of Section 24, T.1 N.-R.2 W, Onondaga Township, Ingham County, Michigan, described as follows: To find the Place of Beginning of Parcel "F" commence at the Southwest corner of Section 24; thence N $89^{\circ}30'47''$ E along the South line of Section 24 a distance of 1731.36ft. to the Place of Beginning of Parcel "F"; thence N $01^{\circ}03'43''$ E 1594.01ft.; thence N $89^{\circ}27'17''$ W 443.34ft. to the West $\frac{1}{8}$ line of Section 24; thence N $0^{\circ}00'30''$ W along the West $\frac{1}{8}$ line of Section 24 a distance of 380.0ft.; thence N $89^{\circ}27'03''$ E 1317.53ft. to the North & South $\frac{1}{4}$ line of Section 24; thence S $0^{\circ}01'00''$ E along the North & South $\frac{1}{4}$ line of Section 24 a distance of 1982.90ft. to the South line of Section 24; thence S $89^{\circ}30'47''$ W along the South line of Section 24 a distance of 904.26ft. to the Place of Beginning of Parcel "F". Containing 44.24 acres.

This description is subject to present restrictions and reservations of record.


Bearings are based on the West line of Section 24, assumed as North or South.



3 15 501

LOCATION MAP
(NO SCALE)

1. All dimensions are in feet and decimals thereof.
2. $\frac{1}{2}$ " bars with identification caps have been placed at all points marked "•" unless otherwise noted.
3. described boundary.
4. fence line.
5. All bearings are relative and are referenced to the North line of Section 25, T1N, R2W, which is assumed to bear East-West.

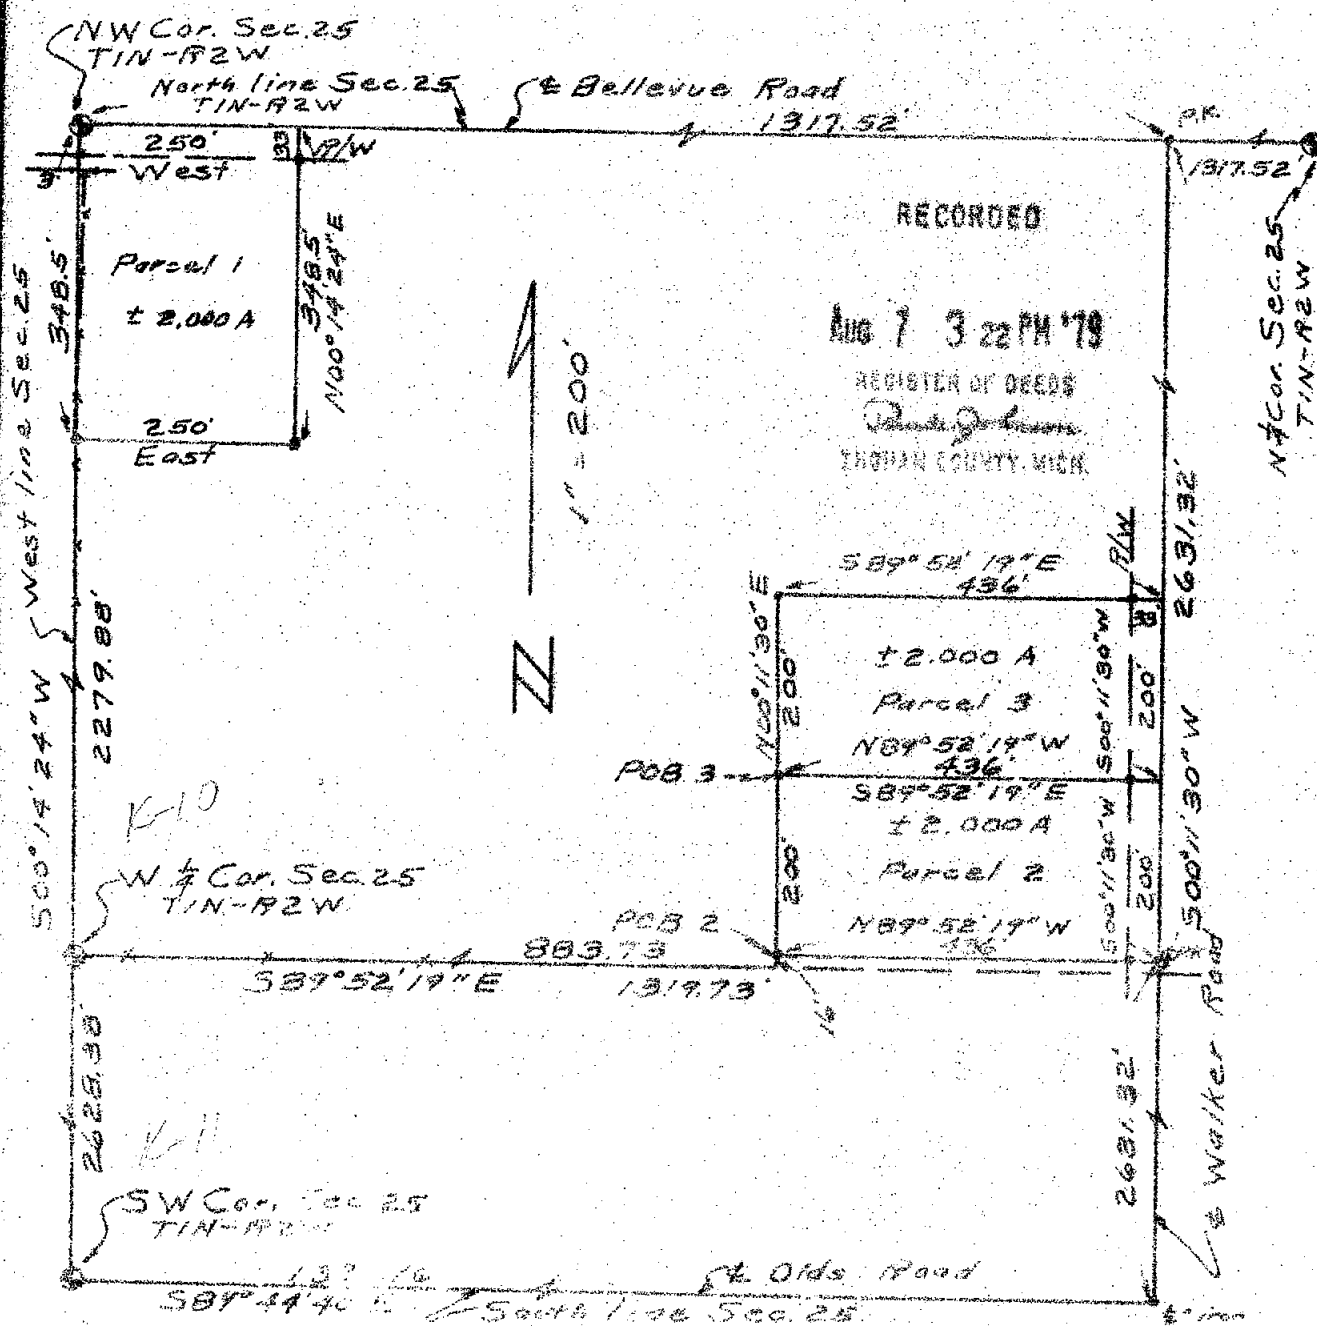

3078

Chapter 1

1145 General Hqs
 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 19

DRAWN	TH	SEC 25 TIN-R2W
COMPUTED	TT	NO 1039

CERTIFIED BOUNDARY SURVEY

3 16 1982

LEGAL DESCRIPTIONS:

Parcel 1

A part of the W $\frac{1}{4}$ of the NW $\frac{1}{4}$ of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan; described as commencing at the NW corner of said Section 25; thence S00°14'24"W along the West line of said Section 25, 348.5'; thence East parallel with the North line of said Section 25, 250.0'; thence N00°14'24"E parallel with the West line of said Section 25, 348.5' to the North line of said Section 25; thence West along the North line of said Section 25, 250.0' to the point of beginning. Contains 2.000 acres, more or less, and subject to the rights of the public over existing Bellevue Road.

Parcel 2

A part of the W $\frac{1}{4}$ of the NW $\frac{1}{4}$ of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan; described as commencing at the W $\frac{1}{4}$ corner of said Section 25; thence S89°52'19"E, 883.73'; thence N00°11'30"E, 16.0' to the point of beginning; thence continuing N00°11'30"E, 200.0'; thence S89°52'19"E, 436.0' to the centerline of Walker Road; thence S00°11'30"W along the centerline of said Walker Road, 200.0'; thence N89°52'19"W, 436.0' to the point of beginning. Contains 2.000 acres, more or less, and subject to the rights of the public over existing Walker Road.

Parcel 3

A part of the W $\frac{1}{4}$ of the NW $\frac{1}{4}$ of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan; described as commencing at the W $\frac{1}{4}$ corner of said Section 25; thence S89°52'19"E, 883.73'; thence N00°11'30"E, 216.0' to the point of beginning; thence continuing N00°11'30"E, 200.0'; thence S89°52'19"E, 436.0' to the centerline of Walker Road; thence S00°11'30"W along the centerline of said Walker Road, 200.0'; thence N89°52'19"W, 436.0' to the point of beginning. Contains 2.000 acres, more or less, and subject to the rights of the public over existing Walker Road.

I hereby certify to the parties named hereon that we have surveyed three parcels of land within the NW $\frac{1}{4}$ of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan; as it is apparently peacefully occupied at present, and that we have found or set, as noted hereon, permanent markers to all corners and angle points of the boundaries of the parcels shown hereon. This survey was performed with an error of closure no greater than a ratio of 1" in 5,000'. This survey complies with the requirements of P.A. 132 of 1970.


N $\frac{1}{4}$ corner Sec. 25, T1N, R2W
anchor post North 36.03'
12" Tamarack S4°W 44.86'
12" Tamarack S30°W 48.92'

SW corner Sec. 25, T1N, R2W
Triple 6" White Ash South 33.92'
Anchor post North 28.59'
24" Maple N55°30'W 34.85'

NW corner Sec. 25, T1N, R2W
15" Maple N60°E 47.83'
36" Locust S03°E 28.35'
15" Maple N78°E 82.90'

W $\frac{1}{4}$ corner Sec. 25, T1N, R2W
Nail & tag 6" Dbbl Maple East 11.40'
Nail & tag 8" Maple West 10.70'
Nail & tag 6" Elm S5°W 7.60'

Austin C. Williams
Austin C. Williams
Registered Land Surveyor
Mich. Registration No. 21275



20781

WILLIAMS

Surveying

1148 Ontario Rd.
Mason, Michigan 48854
Ph: (517) 476-5123

DRAWN	79	SEC. 25, T1N-R2W
COMPUTED	79	108
	79	NO. 102.2
	79	

LIBER

5 932

CERTIFICATE OF SURVEY



RECORDED

JAN 30 8 56 AM '89

REGISTER OF DEEDS

Pamela Johnson

INGHAM COUNTY, MICH.

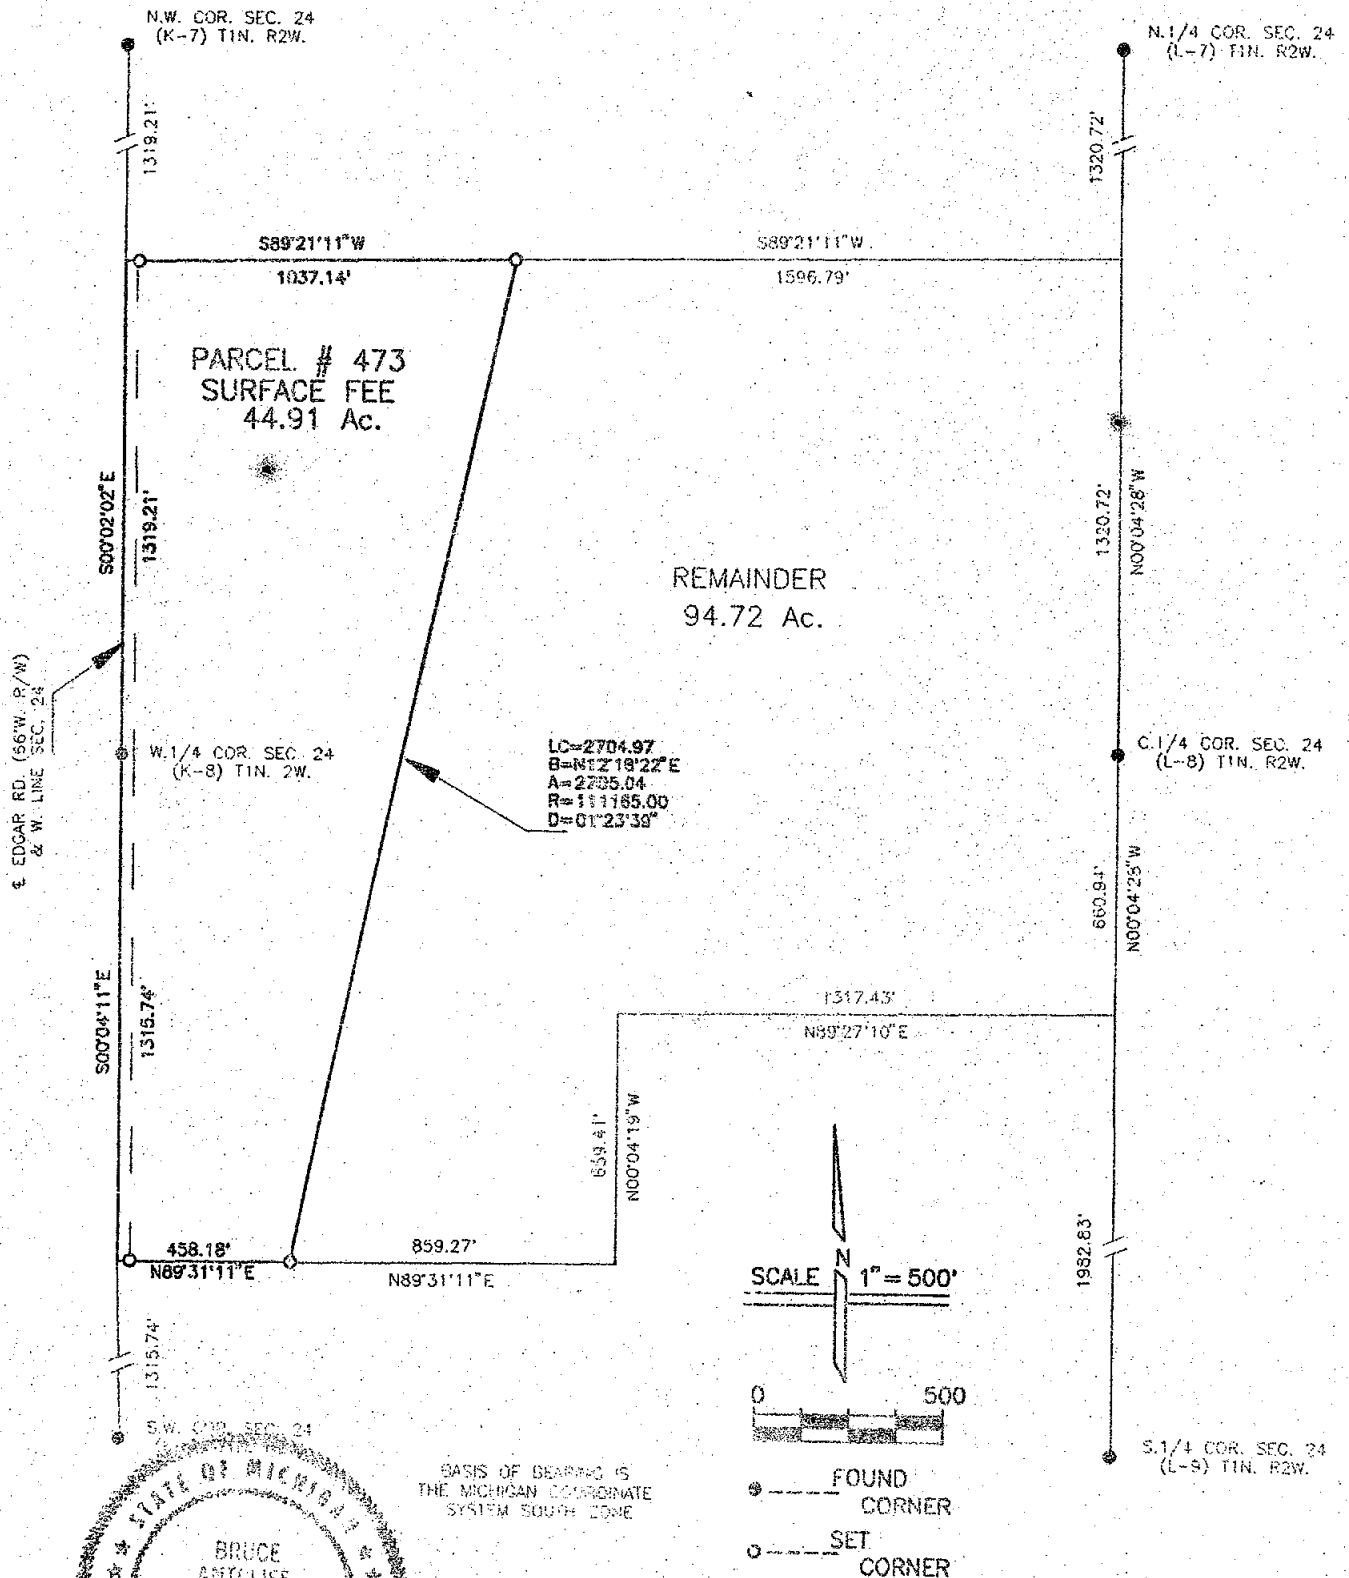A PART OF S.W. 1/4 & N.W. 1/4
SEC. 24, T1N. R2W.Bruce Antcliff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 473

SSU SHERIDAN SURVEYING CO.
803 West High St. Jackson Michigan 48203

FOR

GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Lansing P.A. / Jackson M.I.

DATE 11-88

REV. DATE

PAGE 1 OF 2

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF
MICHIGAN LAWS

PARCEL 473

A parcel of land over, across and under a portion of the NW1/4 and the SW1/4 of Section 24, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the NW Corner of said Section 24; thence along the West line of said Section S00°02'02"E, 1319.21 feet to the Point of Beginning; thence continuing S00°02'02"E, 1319.21 feet to the W1/4 Corner of said Section 24; thence continuing further along said West line S00°04'11"E, 1315.74 feet; thence N89°31'11"E, 458.18 feet to a point on a curve concave to the Southeast and having a radius of 111165 feet; thence Northeasterly 2705.04 feet along said curve through a central angle of 01°23'39"; thence S89°21'11"W, 1037.14 feet to the Point of Beginning.

Said parcel contains 44.91 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

W1/4 Corner Section 24 (K-8)

1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

NW Corner Section 24 (K-7)

3/4" Iron Pipe

N 16 W	Nail in 40" Oak	59.30ft.
S 68 E	"M" in conc. CB	89.80ft.
N 48 E	SW Cor. Conc. MBT box	47.10ft.
S 56 W	Nail in RR tie Cor. Post	46.70ft.

N1/4 Corner Section 24 (L-7)

3/4" Iron Pipe

S 60 W	Nail in 40" Oak	39.60ft.
S 15 E	Nail in 15" Cherry	34.70ft.
N 76 E	Nail in 12" Cherry	85.20ft.
S 59 E	Nail in 12" Pignut	52.20ft.

C1/4 Corner Section 24 (L-8)

3/4" Iron Pipe

N 50 W	Nail in 15" Maple	8.30ft.
S 25 W	Nail in RR tie Fnc. Post	2.20ft.
S 30 E	Nail in 36" Oak	44.40ft.
S 05 E	Nail in 10" Oak	48.50ft.

S1/4 Corner Section 24 (L-9)


1/2" Rered

N 06 E	Nail in Anchor Post	36.10ft.
N 06 W	Sly Point Boulder	43.70ft.
S 10 W	Nail in 12" Cedar	44.90ft.
S 30 W	Nail in 12" Cedar	48.90ft.

SW Corner Section 24 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd. #4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage #3999	100.20ft.

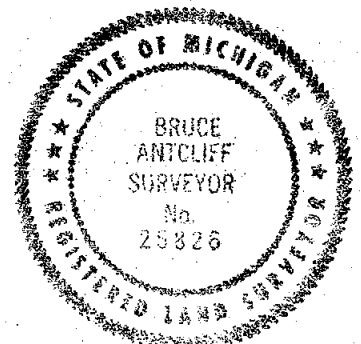

Bruce Antcliff

LICENSED SURVEYOR

3559

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 473

DATE 11-88

REV. DATE

PAGE 2 OF 2

SHERIDAN SURVEYING CO.
303 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEER/CONSULTANTS Building P.A. / Jackson M.I.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLES WITH ALL THE REQUIREMENTS OF

CERTIFICATE OF SURVEY

RECORDED

LIBER



5 934

JAN 30 8 56 AM '88

REGISTER OF DEEDS

Daniel Johnson
INGHAM COUNTY, MICH.

A PART OF S.W. 1/4 SEC. 24
T1N. R2W.

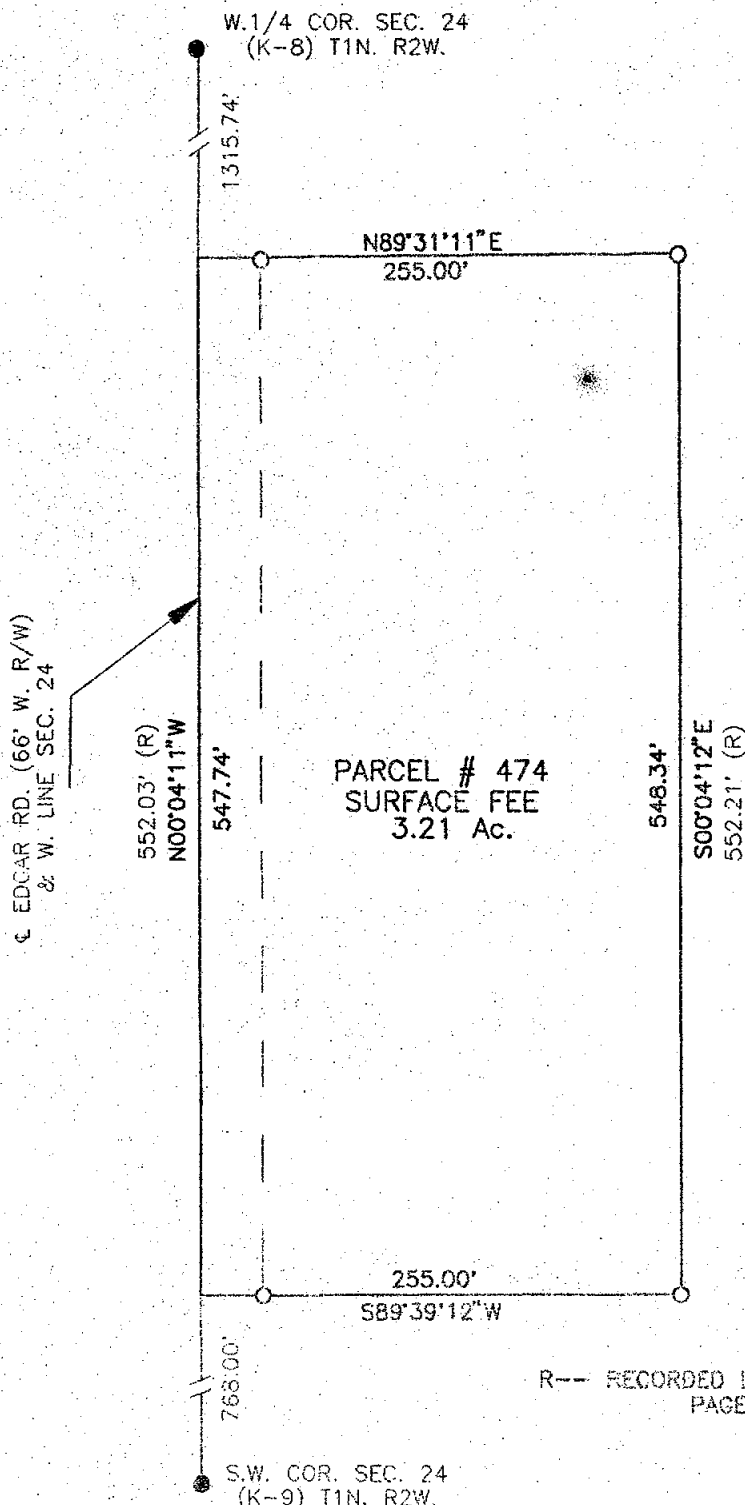

R-- RECORDED DISTANCE LIBER 3,
PAGE 830

Bruce Antcliff

LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 474

DATE 10-88

REV. DATE



SHERIDAN SURVEYING CO.

803 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Lansing P.A. / Jackson M.I.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLES WITH ALL THE REQUIREMENTS OF

LIBER

5 PG 842

CERTIFICATE OF SURVEY



RECORDED

JAN 30 8 56 AM '89

REGISTER OF DEEDS

Paula Johnson

INGHAM COUNTY, MICH.

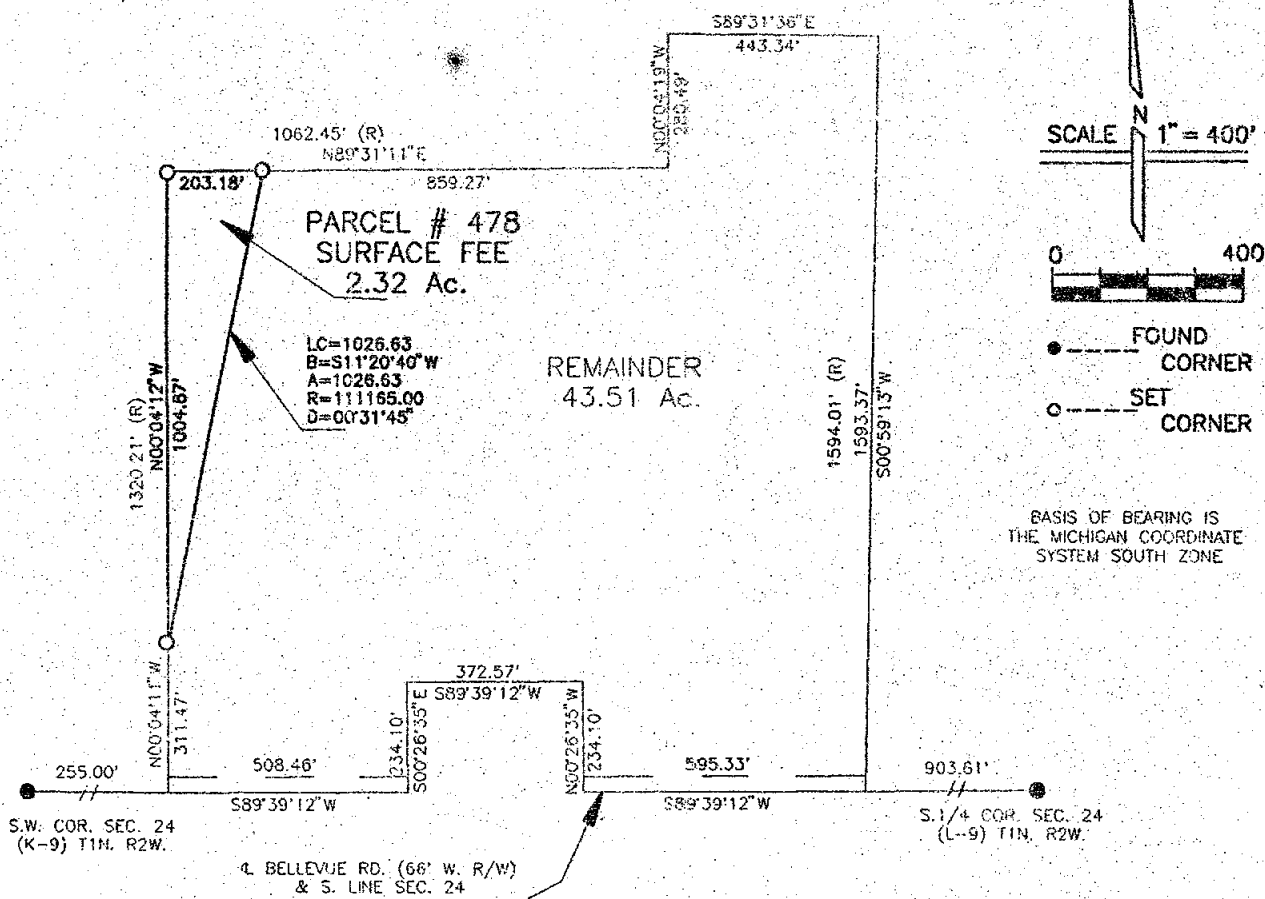A PART OF S.W. 1/4 SEC. 24
T1N. R2W.R--- RECORDED DISTANCE LIBER 3,
PAGE 830

3564

LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 478



SHERIDAN SURVEYING CO.

FOR

GILBERT / COMMONWEALTH

DATE 10-88

803 West High St.

Jackson Michigan 49203



ENGINEERS/CONSULTANTS Reading P.A. / Jackson M.I.

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS

L 98R

5 PG 043

CERTIFICATE OF SURVEY

PARCEL 478

A parcel of land over, across and under a portion of the SW1/4 of Section 24, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the SW Corner of said Section 24; thence along the South line of said Section N89°39'12"E, 255.00 feet; thence N00°04'11"W, 311.47 feet to the Point of Beginning; thence continuing N00°04'11"W, 1004.87 feet; thence N89°31'11"E, 203.18 feet to a point on a curve concave to the Southeast and having a radius of 1111.65 feet; thence Southwesterly 1026.63 feet along said curve through a central angle of 00°31'45" to the Point of Beginning.

Said parcel contains 2.32 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

S1/4 Corner Section 24 (L-9)

1/2" Rod as recorded L5, P365

N 06 E Nail in Anchor Post

36.10ft.

S 02 E NE Cor. Hse. Fnd. #3771

64.30ft.

S 10 W Nail in 12" Cedar

44.90ft.

S 30 W Nail in 12" Cedar

48.90ft.

SW Corner Section 24 (K-9)

Boat Spike

N 30 W SE Cor. Hse. Fnd. #4030

93.60ft.

S 01 E Nail in 40" Locust


28.40ft.

N 57 E Nail in 24" Maple

48.10ft.

S 19 E NE Cor. Garage #3999

100.20ft.



Bruce Antcliff

LICENSED SURVEYOR

3561

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 478



SHERIDAN SURVEYING CO.

FOR

GILBERT / COMMONWEALTH



ENGINEERS/CONSULTANTS Reading P.A. / Jackson M.I.

DATE 10-88

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF

LIBER



5 PG 944

CERTIFICATE OF SURVEY

RECORDED

JAN 30 8 56 AM '89

REGISTER OF DEEDS

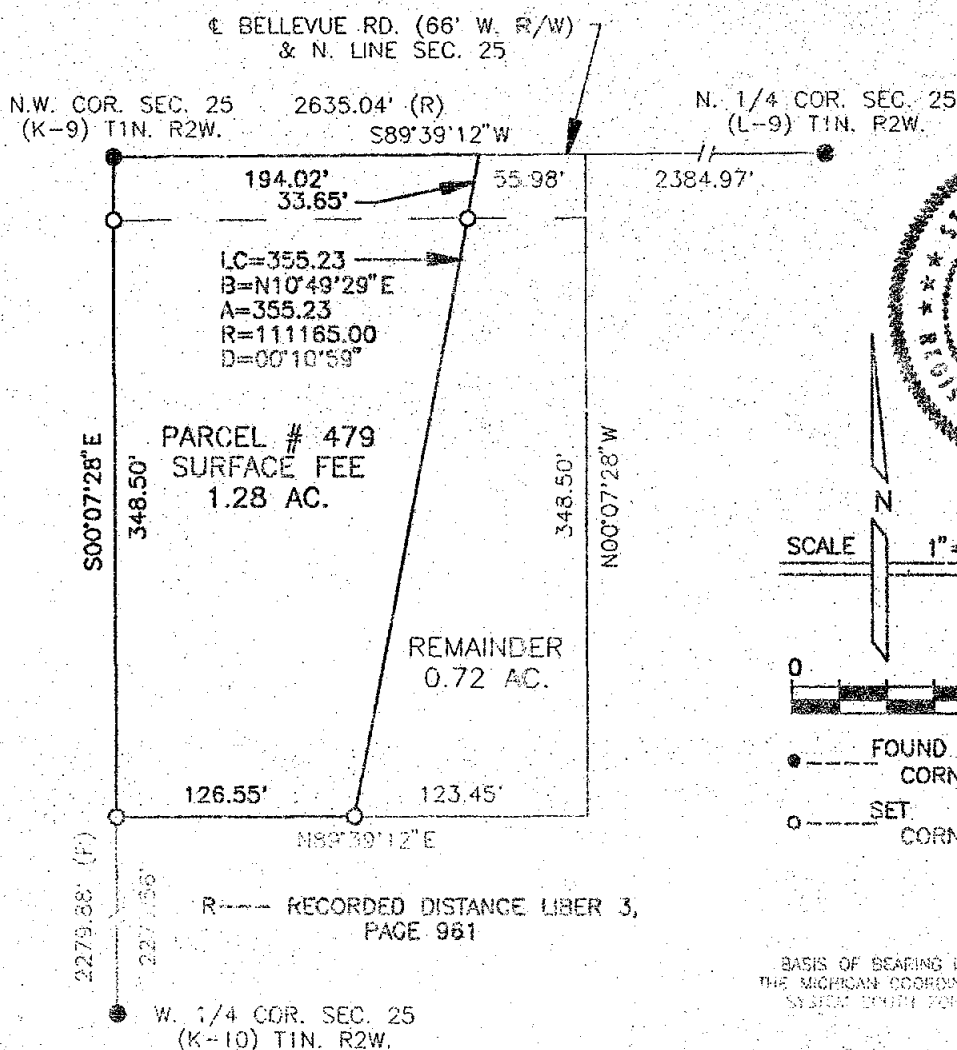Bruce Antcliff
TICHAM COUNTY, MICH.A PART OF N.W. 1/4 SEC. 25
T1N. R2W.

SCALE 1" = 100'

FOUND
CORNER
SET
CORNERBASIS OF BEARING IS
THE MICHIGAN COORDINATE
SYSTEM 1983 ZONE

2565

Bruce Antcliff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 479



SHERIDAN SURVEYING CO.

803 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Lansing P.A. / Jackson M.I.

DATE 10-88

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THE SURVEY WAS MADE IN ACCORDANCE WITH THE REQUIREMENTS OF
THE MICHIGAN SURVEYING ACT.

LIBER

5 PD 945

CERTIFICATE OF SURVEY

PARCEL 479

A parcel of land over, across and under a portion of the NW1/4 of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Beginning at the NW Corner of said Section 25; thence along the West line of said Section S00°07'28"E, 348.50 feet; thence N89°39'12"E, 126.55 feet to a point on a curve concave to the Southeast and having a radius of 111165 feet; thence Northeasterly 355.23 feet along said curve through a central angle of 00°10'59" to the North line of said Section 25; thence along said North line S89°39'12"W, 194.02 feet to the Point of Beginning.

Said parcel contains 1.28 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

N1/4 Corner Section 25 (L-9)

1/2" Rod as recorded L5, P365

N 06 E	Nail in Anchor Post	36.10ft.
S 02 E	NE Cor. Hse. Fnd. #3771	64.30ft.
S 10 W	Nail in 12" Cedar	44.90ft.
S 30 W	Nail in 12" Cedar	48.90ft.

W1/4 Corner Section 25 (K-10)


1/2" Rerod

N 85 W	Nail in 10" Maple	10.60ft.
East	Nail in 6" Maple	11.50ft.
S 05 W	Nail in 12" Elm	7.60ft.
N 17 W	Nail in 15" Maple	10.20ft.

NW Corner Section 25 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd. #4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage #3999	100.20ft.



Bruce Antcliff
LICENSED SURVEYOR

2565

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 479

DATE 10-88

REV. DATE



SHERIDAN SURVEYING CO.
603 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA. / Jackson MI.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 AS SET BY THE RULES AND REGULATIONS OF THE MICHIGAN SURVEYORS ASSOCIATION.

LIBER


5 pg 948

CERTIFICATE OF SURVEY

RECORDED

JAN 30 8 56 AM '89

REGISTER OF DEEDS

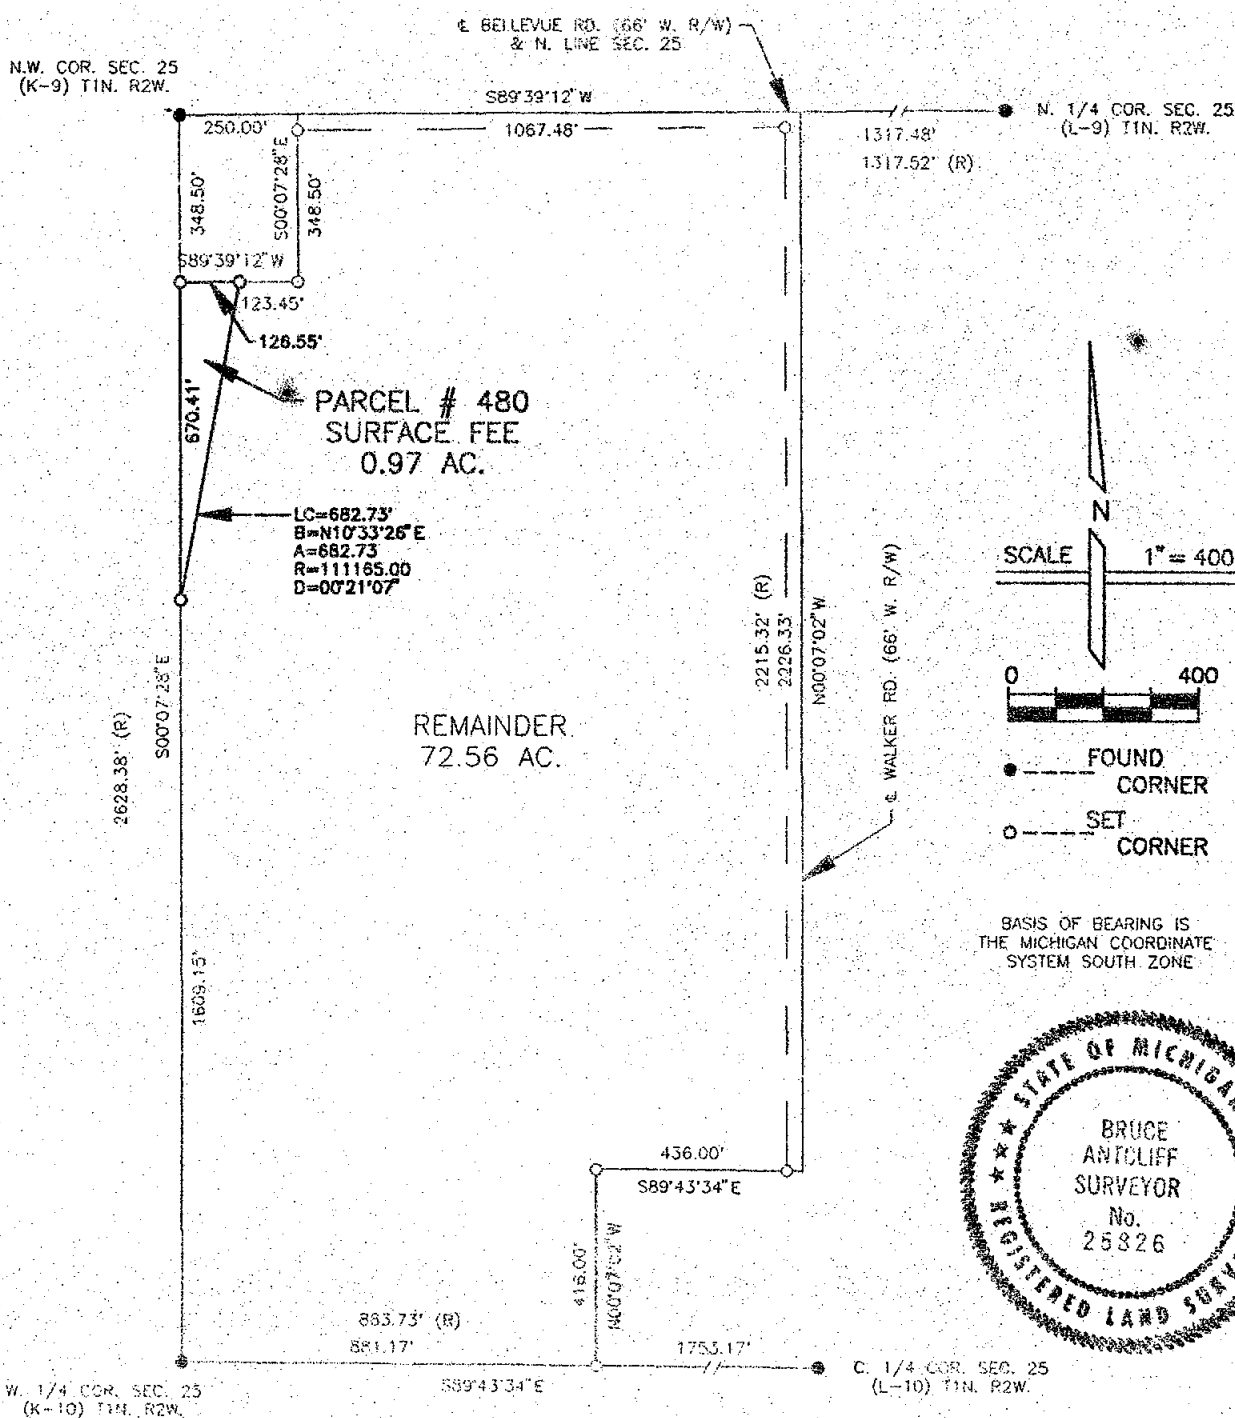Paula Johnson
INGHAM COUNTY, MICH.A PART OF N.W. 1/4 SEC. 25
T1N. R2W.R--- RECORDED DISTANCE LIBER 3,
PAGE 961


2586

Bruce Antcliff

LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 480



SHERIDAN SURVEYING CO.

FOR

GILBERT / COMMONWEALTH

DATE 10-88

803 West High St. Jackson Michigan 49203



OWNERS/CONSULTANTS Lansing P.A. / Jackson M.I.

REV. DATE

1-89

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF

PARCEL 480

A parcel of land over, across and under a portion of the NW1/4 of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the NW Corner of said Section 25; thence along the West line of said Section S00°07'28"E, 348.50 feet to the Point of Beginning; thence continuing along said West line S00°07'28"E, 670.41 feet to a point on a curve concave to the Southeast and having a radius of 111165 feet; thence Northeasterly 682.73 feet along said curve through a central angle of 00°21'07"; thence S89°39'12"W, 126.55 feet to the Point of Beginning.

Said parcel contains 0.97 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

N1/4 Corner Section 25 (L-9)

1/2" Rod as recorded L5, P365

N 06 E	Nail in Anchor Post	36.10ft.
S 02 E	NE Cor. Hse. Fnd. #3771	64.30ft.
S 10 W	Nail in 12" Cedar	44.90ft.
S 30 W	Nail in 12" Cedar	48.90ft.

W1/4 Corner Section 25 (K-10)

1/2" Rerod

N 85 W	Nail in 10" Maple	10.60ft.
East	Nail in 6" Maple	11.50ft.
S 05 W	Nail in 12" Elm	7.60ft.
N 17 W	Nail in 15" Maple	10.20ft.

C1/4 Corner Section 25 (L-10)


1/2" Rerod/cap #25832

N 84 W	Nail in 15" Elm	18.50ft.
S 65 W	Nail in Anchor Post	22.80ft.
N 17 E	Nail in 12" Willow	27.50ft.
S 71 E	Nail in 24" Cherry	35.60ft.

NW Corner Section 25 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd. #4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage #3999	100.20ft.



Bruce Antcliff

LICENSED SURVEYOR

3566

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 480

DATE 10-88

REV. DATE



SHERIDAN SURVEYING CO.

803 West High St. Jackson Michigan 48203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading P.A. / Jackson M.I.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLETES WITH ALL THE REQUIREMENTS OF

PARCEL 474

A parcel of land over, across and under a portion of the SW1/4 of Section 24, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the SW Corner of said Section 24; thence along the West line of said Section N00°04'11"W, 768.00 feet to the Point of Beginning; thence continuing N00°04'11"W, 547.74 feet; thence N89°39'11"E, 255.00 feet; thence S00°04'12"E, 548.34 feet; thence S89°39'12"W, 255.00 feet to the Point of Beginning.

Said parcel contains 3.21 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

W1/4 Corner Section 24 (K-8)


1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

SW Corner Section 24 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fud.#4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage#3999	100.20ft.



Bruce Antcliff

LICENSED SURVEYOR

3560

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 474

DATE 10-88

REV. DATE



SHERIDAN SURVEYING CO.

303 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA / Jackson MI

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF

LIVER

5 PG 936

CERTIFICATE OF SURVEY



RECORDED

JAN 30 8 56 AM '89


REGISTER OF DEEDS

Bruce Johnson
INGHAM COUNTY, MICH.

A PART OF S.W. 1/4 SEC. 24
T1N. R2W.

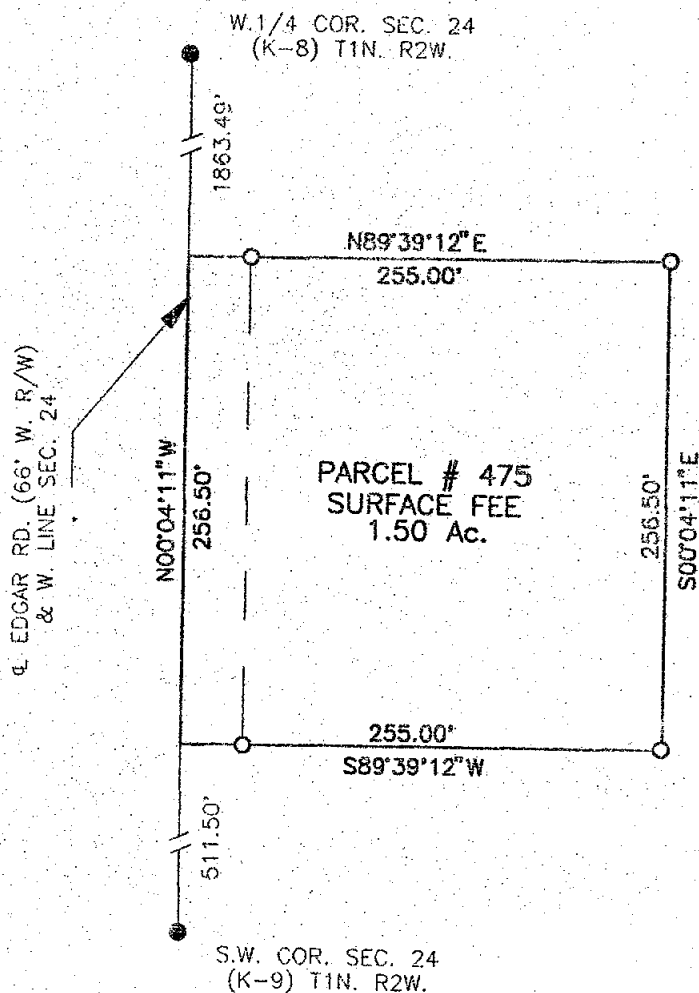

BASIS OF BEARING IS
THE MICHIGAN COORDINATE
SYSTEM SOUTH ZONE



Bruce Antcliff

LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 475

DATE 11-88

REV. DATE



SHERIDAN SURVEYING CO.

803 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA / Jackson MI

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:30,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF P.A. 139 OF 1970.

PARCEL 475

A parcel of land over, across and under a portion of the SW1/4 of Section 24, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the SW Corner of said Section 24; thence along the West line of said Section N00°04'11"W, 511.50 feet to the Point of Beginning; thence continuing N00°04'11"W, 256.50 feet; thence N89°39'12"E, 255.00 feet; thence S00°04'11"E, 256.50 feet; thence S89°39'12"W, 255.00 feet to the Point of Beginning.

Said parcel contains 1.50 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

W1/4 Corner Section 24 (K-8)


1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

SW Corner Section 24 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd.#4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage#3999	100.20ft.



Bruce Antcliff

LICENSED SURVEYOR

3561

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 475

DATE 11-88

REV. DATE

PAGE 2 OF 2



SHERIDAN SURVEYING CO.
903 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS, Planning P.A.s / Jackson M.I.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF P.A. 132 OF 1976.

LIBER

5 988



CERTIFICATE OF SURVEY

RECORDED

JAN 30 8 56 AM '89

REGISTER OF DEEDS

Ingham County, Mich.

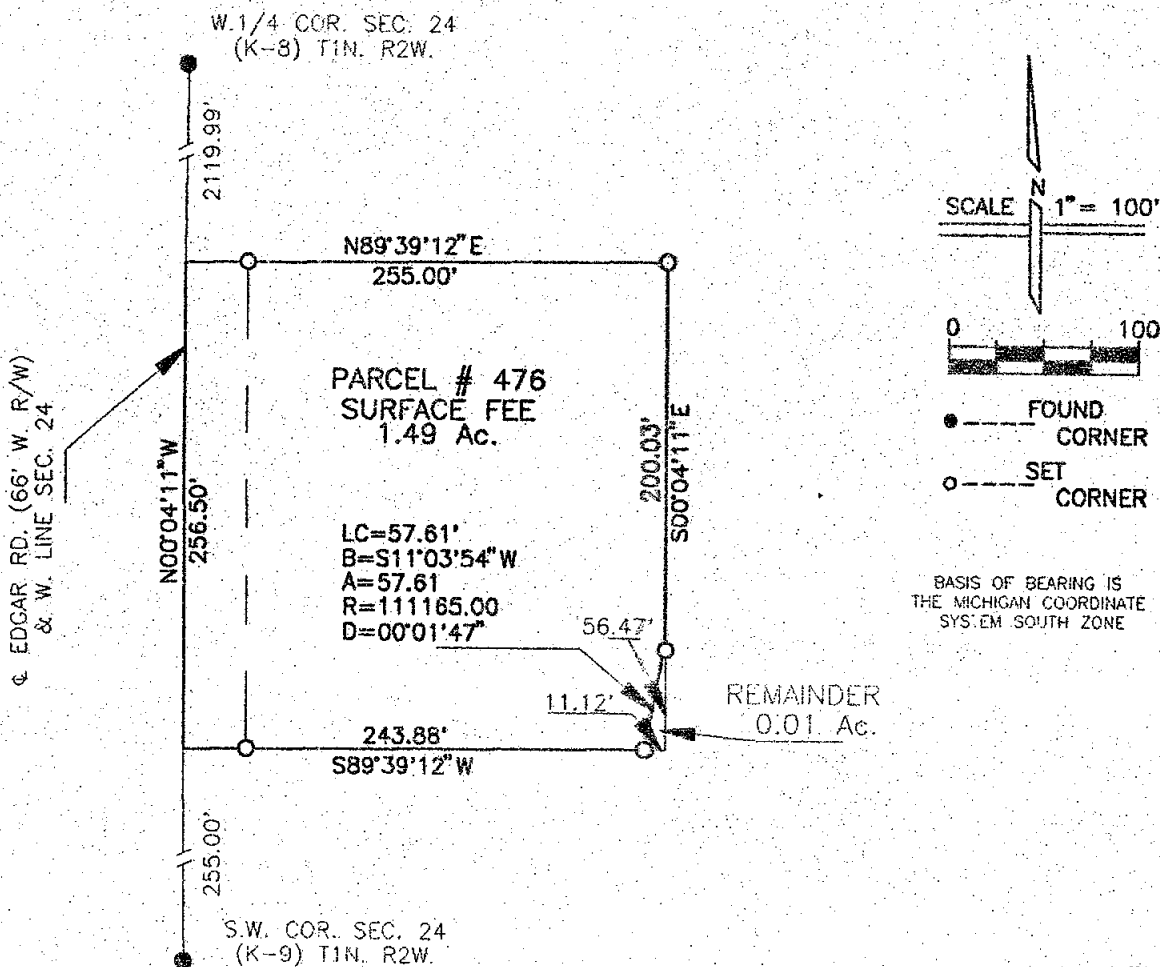A PART OF S.W. 1/4 SEC. 24
T1N. R2W.

2562

Bruce Antcliff

LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 476

SHERIDAN SURVEYING CO.
803 West High St. Jackson Michigan 49203

FOR

GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA / Jackson MI

DATE 11-88

REV. DATE

PAGE 1 OF 2

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF

PARCEL 476

A parcel of land over, across and under a portion of the SW1/4 of Section 24, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the SW Corner of said Section 24; thence along the West line of said Section N00°04'11"W, 255.00 feet to the Point of Beginning; thence continuing N00°04'11"W, 256.50 feet; thence N89°39'12"E, 255.00 feet; thence S00°04'11"E, 200.03 feet to a point on a curve concave to the Southeast and having a radius of 111165 feet; thence Southwesterly 57.61 feet along said curve through a central angle of 00°01'47"; thence S89°39'12"W, 243.88 feet to the Point of Beginning.

Said parcel contains 1.49 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

W1/4 Corner Section 24 (K-8)


1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

SW Corner Section 24 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd.#4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage #3999	100.20ft.



Bruce Antcliff

LICENSED SURVEYOR

3562

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 476



SHERIDAN SURVEYING CO.

FOR



GILBERT / COMMONWEALTH

DATE 11-88

903 West High St. Jackson Michigan 48203

ENGINEERS/ARCHITECTS Lansing PA / Jackson MI.

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF

LIBER

5 940

CERTIFICATE OF SURVEY



RECORDED

JAN 30 8 56 AM '89

REGISTER OF DEEDS

Bruce Antcliff
INCHAM COUNTY, MICH.

A PART OF S.W. 1/4 SEC. 24
T1N. R2W.

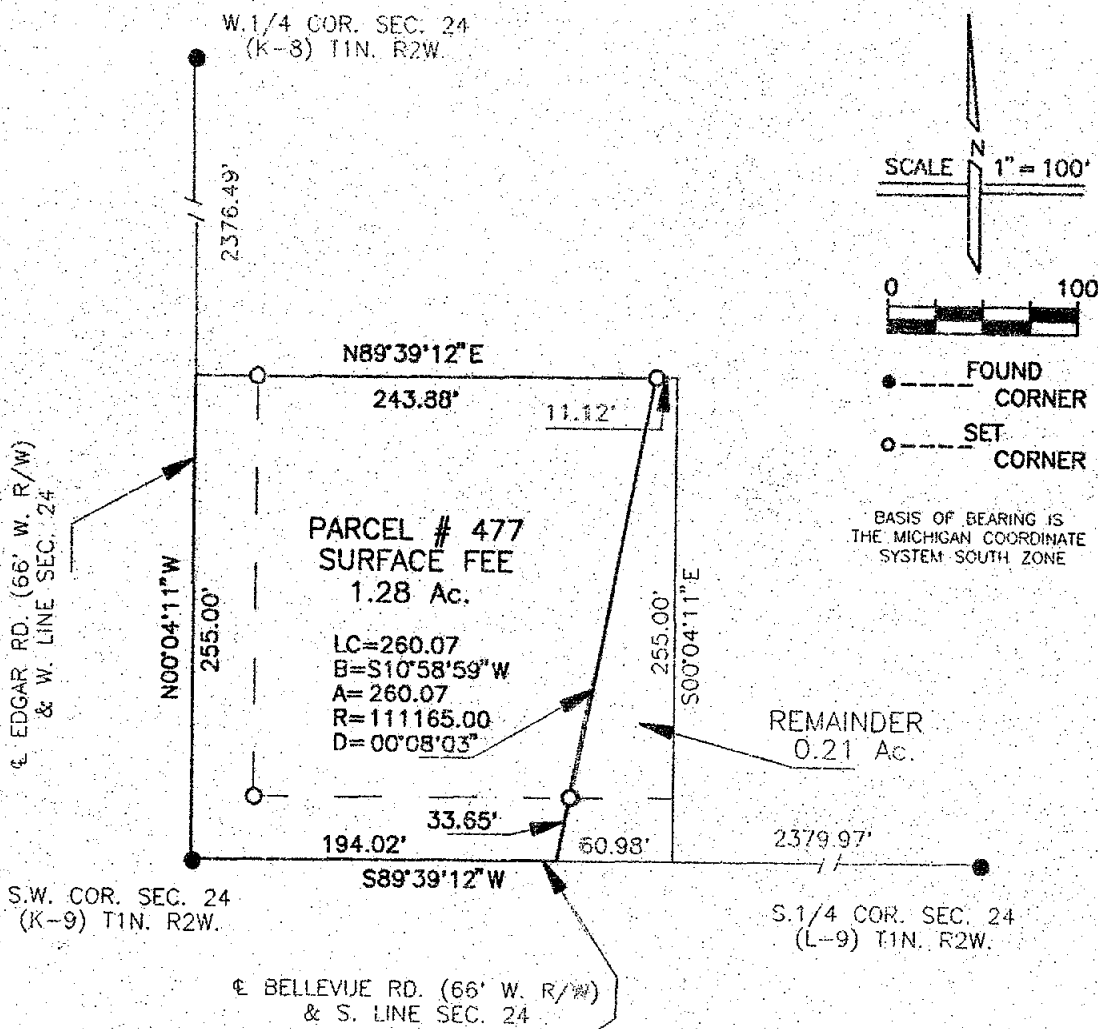

Bruce Antcliff
LICENSED SURVEYOR

3563

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 477

DATE 11-88

REV. DATE

PAGE 1 OF 2

SSU SHERIDAN SURVEYING CO.
603 West High St. Jackson Michigan 49203

FOR

GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA / Jackson MI

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF P.A. 132 OF 1970.

LIBER

5 941

CERTIFICATE OF SURVEY

PARCEL 477

A parcel of land over, across and under a portion of the SW1/4 of Section 24, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Beginning at the SW Corner of said Section 24; thence along the West line of said Section N00°04'11"W, 255.00 feet; thence N89°39'12"E, 243.88 feet to a point on a curve concave to the Southeast and having a radius of 111165 feet; thence Southwesterly 260.07 feet along said curve through a central angle of 00°08'03" to the South line of said Section 24; thence along said South line S89°39'12"W, 194.02 feet to the Point of Beginning.

Said parcel contains 1.28 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

S1/4 Corner Section 24 (L-9)

1/2" Rod as recorded L5, P365

N 06 E	Nail in Anchor Post	36.10ft.
S 02 E	NE Cor. Hse. Fnd. #3771	64.30ft.
S 10 W	Nail in 12" Cedar	44.90ft.
S 30 W	Nail in 12" Cedar	48.90ft.

W1/4 Corner Section 24 (K-8)


1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

SW Corner Section 24 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd. #4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage #3999	100.20ft.




Bruce Antcliff
LICENSED SURVEYOR

3562

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 477



SHERIDAN SURVEYING CO.

FOR

GILBERT / COMMONWEALTH

DATE 11-88

303 West High St. Jackson Michigan 49203



ENGINEER/CONSULTANTS Holding P.A. / Jackson M.I.

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF THE MICHIGAN SURVEYING ACT.

LIBER


5 PG 352

CERTIFICATE OF SURVEY


RECORDED

Jan 30 8 56 AM '89

REGISTER OF DEEDS

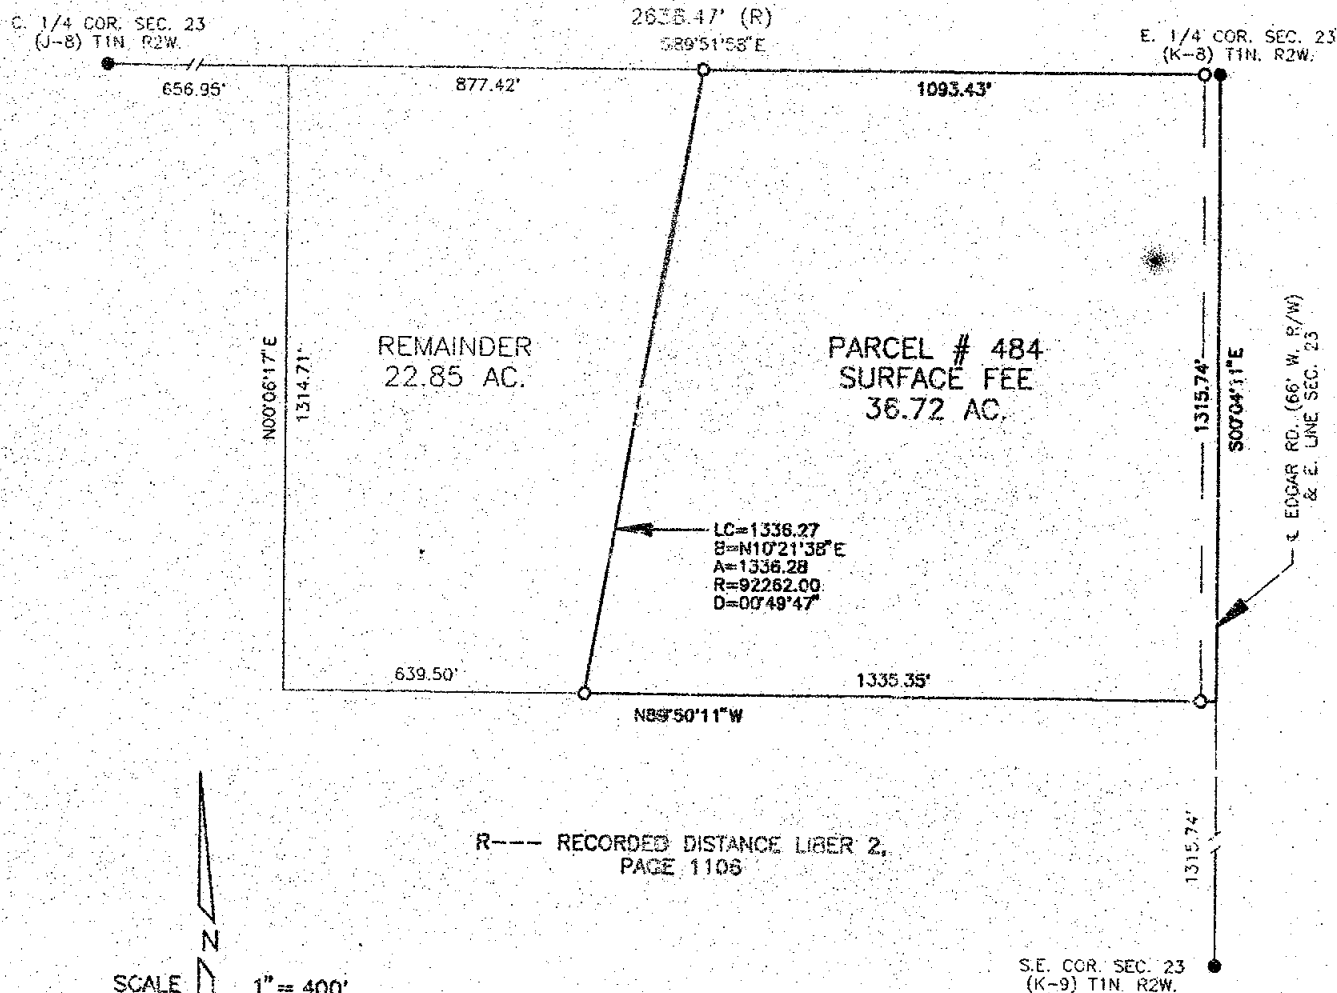Pamela Johnson
INGHAM COUNTY, MICH.A PART OF S.E. 1/4 SEC. 23
T1N. R2W.

3569



Bruce Antcliff

LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 484

DATE 10-88

REV. DATE



SHERIDAN SURVEYING CO.

303 West High St. Jackson Michigan 48203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Harding P.A. / Jackson M.I.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1.10 270 AS SETTER AND THAT THE SURVEY WAS MADE IN ACCORDANCE WITH THE MICHIGAN SURVEYING ACT OF 1966.

PARCEL 484

A parcel of land over, across and under a portion of the SE1/4 of Section 23, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Beginning at the E1/4 Corner of said Section 23; thence along the East line of said Section S00°04'11"E, 1315.74 feet; thence N89°50'11"W, 1335.35 feet to a point on a curve concave to the Southeast and having a radius of 92262 feet; thence Northeasterly 1336.28 feet along said curve through a central angle of 00°49'47" to the E-W 1/4 line of said Section; thence along said 1/4 line S89°51'58"E, 1093.43 feet to the Point of Beginning.

Said parcel contains 36.72 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

E1/4 Corner Section 23 (K-8)

1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

SE Corner Section 23 (K-9)


Boat Spike

N 30 W	SE Cor. Hse. Fnd.#4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage#3999	100.20ft.

C1/4 Corner Section 23 (J-8)

1/2" Iron Rod

N 70 W	Nail in 12" Oak	9.30ft.
N 10 W	Nail in 36" Maple stump	7.40ft.
S 05 W	Nail in 40" Maple	21.40ft.
S 85 W	Nail in 10" Oak	55.60ft.



Bruce Antcliff

LICENSED SURVEYOR

3569

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 484



SHERIDAN SURVEYING CO.

FOR

GILBERT / COMMONWEALTH

DATE 10-88

603 West High St. Jackson, Michigan 48203

ENGINEERS/CONSULTANTS Jackson, PA / Jackson, MI

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS

LIBER

5 95A



CERTIFICATE OF SURVEY

RECORDED

JAN 30 8 56 AM '89

REGISTER OF DEEDS

Ingham County, Mich.

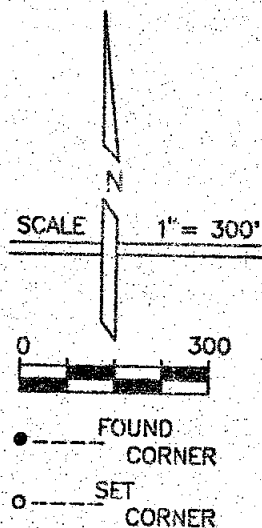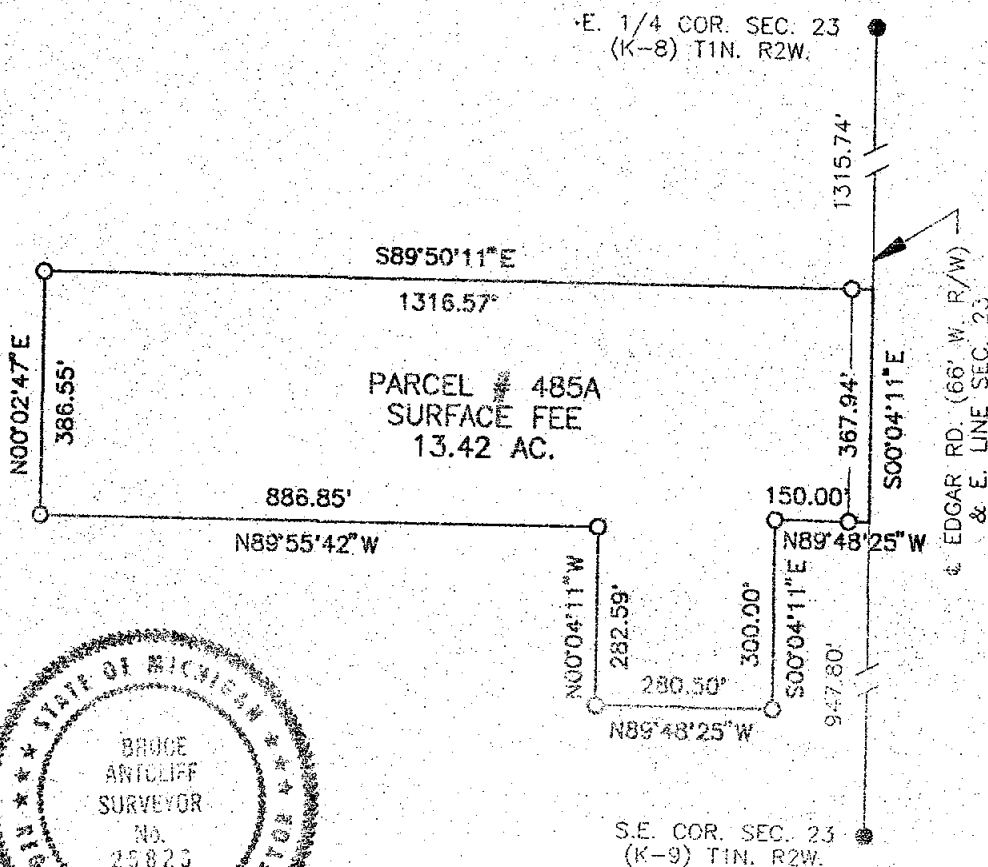A PART OF S.E. 1/4 SEC. 23
T1N. R2W.BASIS OF BEARING IS
THE MICHIGAN COORDINATE
SYSTEM SOUTH ZONE

3520

Bruce Antcliff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 485A

DATE 11-88

REV. DATE

PAGE 1 OF 2



SHERIDAN SURVEYING CO.

803 West High St. Jackson Michigan 48203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA. / Jackson MI.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF
P.A. 132 OF 1970.

LIBER

5 055

CERTIFICATE OF SURVEY

PARCEL 485A

A parcel of land over, across and under a portion of the SE1/4 of Section 23, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the E1/4 Corner of said Section 23; thence along the East line of said Section S00°04'11"E, 1315.74 feet to the Point of Beginning; thence continuing along said East line S00°04'11"E, 367.94 feet; thence N89°48'25"W, 150.00 feet; thence S00°04'11"E, 300.00 feet; thence N89°48'25"W, 280.50 feet; thence N00°04'11"W, 282.59 feet; thence N89°55'42"W, 886.85 feet; thence N00°02'47"E, 386.55 feet; thence S89°50'11"E, 1316.57 feet to the Point of Beginning.

Said parcel contains 13.42 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

E1/4 Corner Section 23 (K-8)


1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

SE Corner Section 23 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd. #4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage #3999	100.20ft.



Bruce Antcliff
LICENSED SURVEYOR

0570

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 485A



SHERIDAN SURVEYING CO.

FOR

GILBERT / COMMONWEALTH

DATE 11-88

803 West High St.

Jackson Michigan 49203



SURVEYORS/CONSULTANTS Lansing P.A. / Jackson M.I.

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLES WITH ALL THE REQUIREMENTS OF



PAGE 2 OF 2

5 pg 956

Paula Johnson
INGHAM COUNTY, IDAHO

INGHAM COUNTY - MDCA

INGHAM COUNTY, ILL.
A PART OF S.E. 1/4, N.W. 1/4 &
S.W. 1/4 SEC. 23
T1N. R2W.

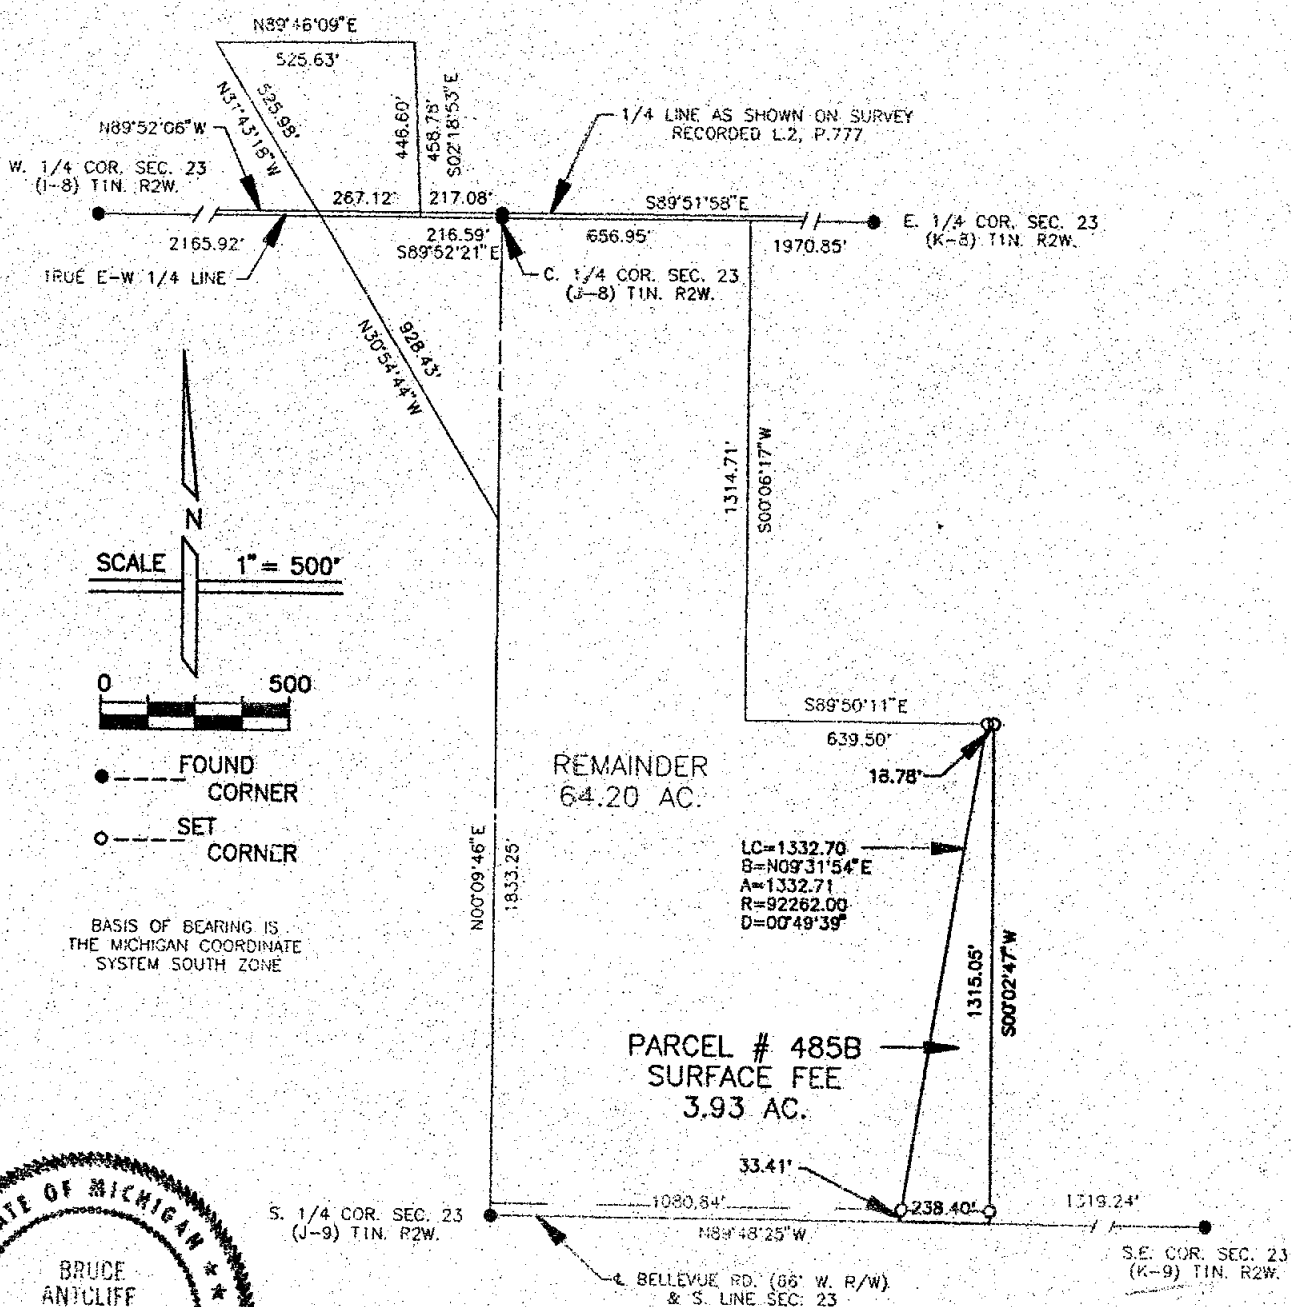

3571

Bruce Anteloff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 485B

DATE 10-88

REV. DATE

PAGE 1 OF 2

SSU SHERIDAN SURVEYING CO.
303 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading P.A. / Jackson Ill.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIED WITH ALL THE REQUIREMENTS OF THE SURVEYING ACT OF 1908.

CERTIFICATE OF SURVEY

LIBER

5 357

PARCEL 485B

A parcel of land over, across and under a portion of the SE1/4, the NW1/4, and the SW1/4 of Section 23, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the SE Corner of said Section 23; thence along the South line of said Section N89°48'25"W, 1319.24 feet to the Point of Beginning; thence continuing along said South line N89°48'25"W, 238.40 feet to a point on a curve concave to the Southeast and having a radius of 92262 feet; thence Northeasterly 1332.71 feet along said curve through a central angle of 00°49'39"; thence S89°50'11"E, 18.78 feet; thence S00°02'47"W, 1315.05 feet to the Point of Beginning.

Said parcel contains 3.93 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

S1/4 Corner Section 23 (J-9)

2" Iron Pipe

S 79 E	Nail in 40" Oak	300.80ft.
S 38 E	Nail in Util. Pole	104.90ft.
N 13 E	Angle Iron gate post	26.40ft.
N 48 E	Angle Iron gate post	35.80ft.

W1/4 Corner Section 23 (I-8)

1/2" Bar

N 23 E	N&T 40" Twin Oak	31.7ft.
N 43 E	N&T 50" Oak	6.2ft.
S 45 E	N&T 15" Red Oak	15.9ft.
S 70 E	N&T 15" Oak	20.4ft.

E1/4 Corner Section 23 (K-8)

1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

C1/4 Corner Section 23 (J-8)


1/2" Iron Rod

N 70 W	Nail in 12" Oak	9.30ft.
N 10 W	Nail in 36" Maple stump	7.40ft.
S 05 W	Nail in 40" Maple	21.40ft.
S 85 W	Nail in 10" Oak	55.60ft.

SE Corner Section 23 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd.#4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage#3999	100.20ft.



Bruce Antcliff

LICENSED SURVEYOR

3571

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 485B

SHERIDAN SURVEYING CO.
503 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Lansing P.A. / Jackson M.I.

DATE 10-88

REV. DATE

PAGE 2 OF 2

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLES WITH ALL THE REQUIREMENTS OF P.A. 132 OF 1977.

LIBER



5 958

CERTIFICATE OF SURVEY

RECORDED

JAN 30 8 57 AM '88

REGISTER OF DEEDS

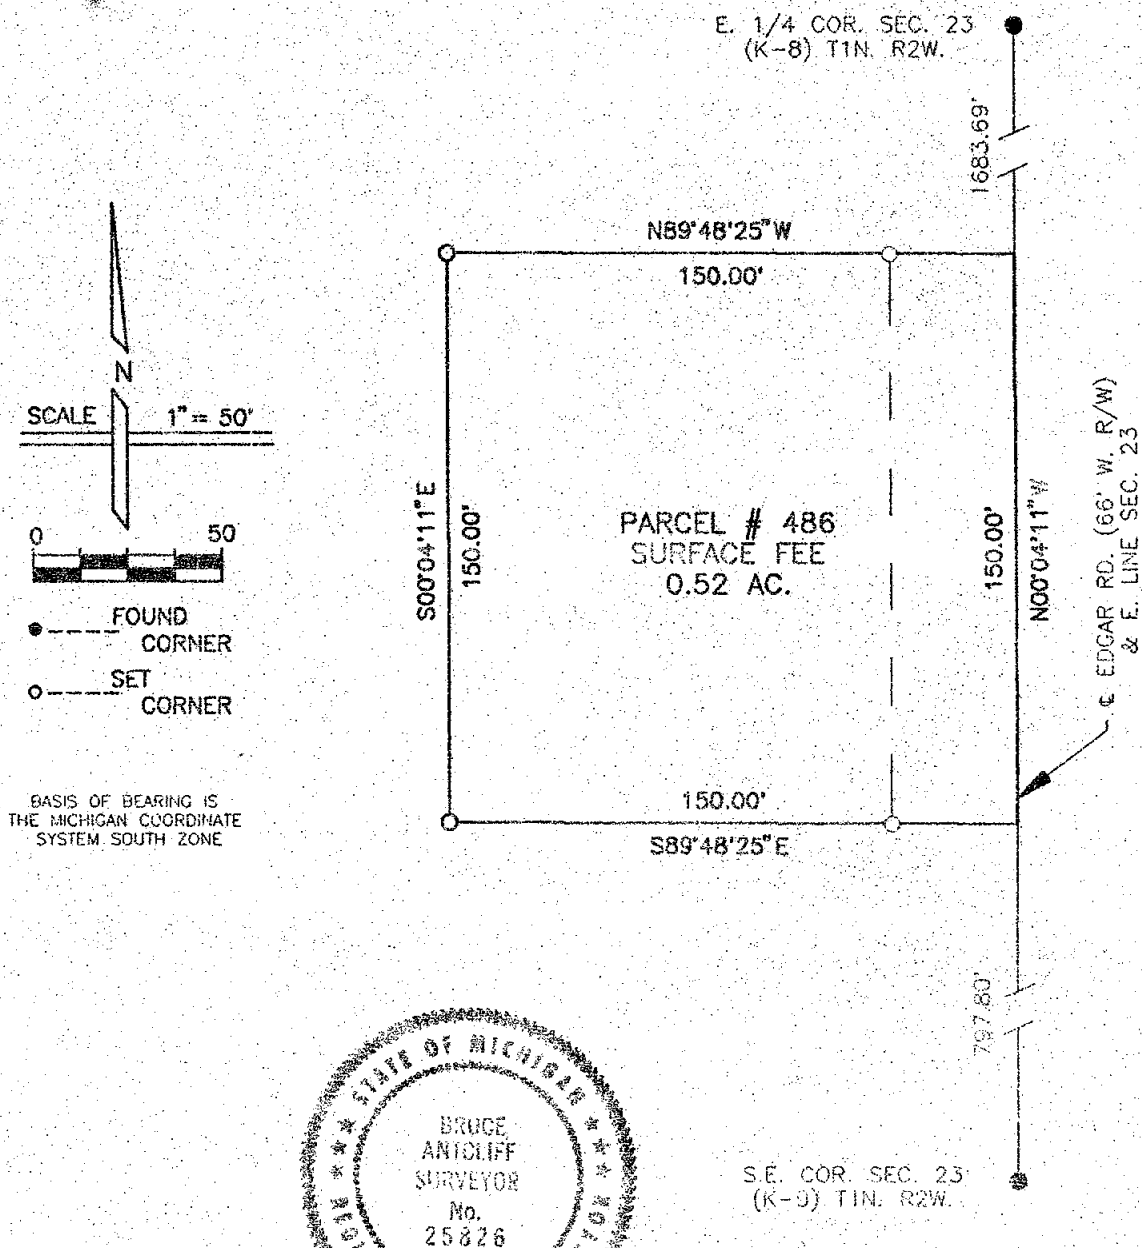Paul Johnson
INGHAM COUNTY, MICH.A PART OF S.E. 1/4 SEC. 23
T1N. R2W.Bruce Antcliff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 486



SHERIDAN SURVEYING CO.

FOR

GILBERT / COMMONWEALTH

DATE 11-88

603 West High St. Jackson Michigan 48203



ENGINEERING/CONSULTANTS Reading PA. / Jackson MI.

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS

LIBER

5 959

CERTIFICATE OF SURVEY

PARCEL 486

A parcel of land over, across and under a portion of the SE1/4 of Section 23, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the SE Corner of said Section 23; thence along the East line of said Section N00°04'11"W, 797.80 feet to the Point of Beginning; thence continuing N00°04'11"W, 150.00 feet; thence N89°48'25"W, 150.00 feet; thence S00°04'11"E, 150.00 feet; thence S89°48'25"E, 150.00 feet to the Point of Beginning.

Said parcel contains 0.52 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

E1/4 Corner Section 23 (K-8)

1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

SE Corner Section 23 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd. #4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage #3999	100.20ft.


*Bruce Antcliff*

LICENSED SURVEYOR

3572

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 486



SHERIDAN SURVEYING CO.

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Lansing PA / Jackson MI

DATE 11-88

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS

L 100

5 060

CERTIFICATE OF SURVEY

RECORDED


JAN 30 8 57 AM '89

REGISTER OF DEEDS

Paula Johnson
INGHAM COUNTY, MICH.



A PART OF S.E. 1/4 SEC. 23
T1N. R2W.

E. 1/4 COR. SEC. 23
(K-8) T1N. R2W.

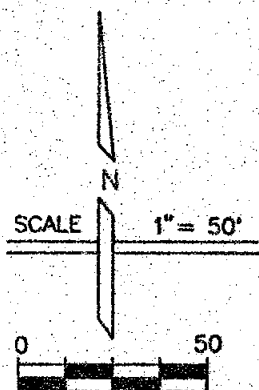

● FOUND
CORNER
○ SET
CORNER

BASIS OF BEARING IS
THE MICHIGAN COORDINATE
SYSTEM SOUTH ZONE

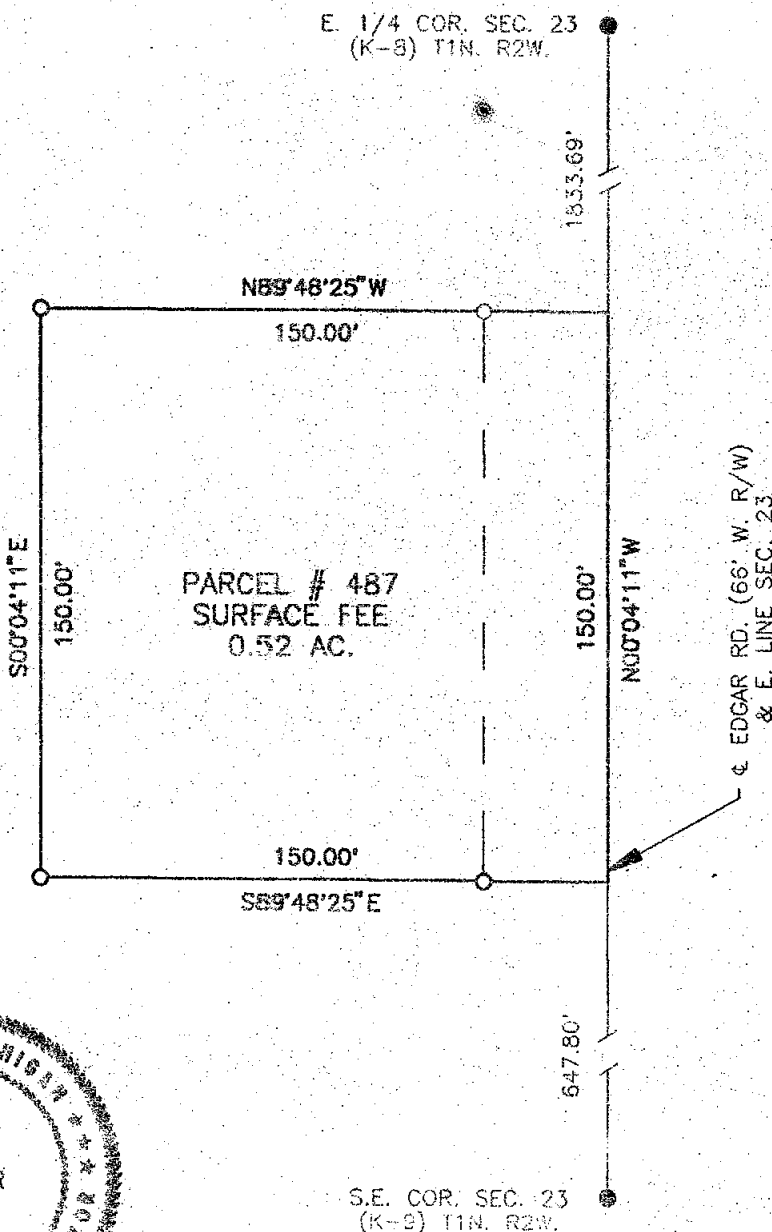

S.E. COR. SEC. 23
(K-8) T1N. R2W.

Bruce Antcliff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 487

SSU SHERIDAN SURVEYING CO. FOR
303 West High St. Jackson Michigan 49203



GILBERT / COMMONWEALTH
ENGINEERS/CONSULTANTS Reading P.A. / Jackson M.I.

DATE 11-88

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 11-88 AND THAT THE DATA OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1.10 AND AS BETTER AND TRUE THAN ANY OTHER SURVEYING DATA.

PARCEL 487

A parcel of land over, across and under a portion of the SE1/4 of Section 23, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the SE Corner of said Section 23; thence along the East line of said Section N00°04'11"W, 647.80 feet to the Point of Beginning; thence continuing N00°04'11"W, 150.00 feet; thence N89°48'25"W, 150.00 feet; thence S00°04'11"E, 150.00 feet; thence S89°48'25"E, 150.00 feet to the Point of Beginning.

Said parcel contains 0.52 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

E1/4 Corner Section 23 (K-8)


1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

SE Corner Section 23 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd. #4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage #3999	100.20ft.




Bruce Antcliff

LICENSED SURVEYOR

3573

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 487



SHERIDAN SURVEYING CO.

FOR

GILBERT / COMMONWEALTH

DATE 11-88

803 West High St.

Jackson Michigan 49203



ENGINEERS/CONSULTANTS Reading PA / Jackson MI

REV. DATE

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLETES WITH ALL THE REQUIREMENTS OF

LIBER



5 PG 962

CERTIFICATE OF SURVEY

RECORDED

JAN 30 8 57 AM '89

REGISTER OF DEEDS

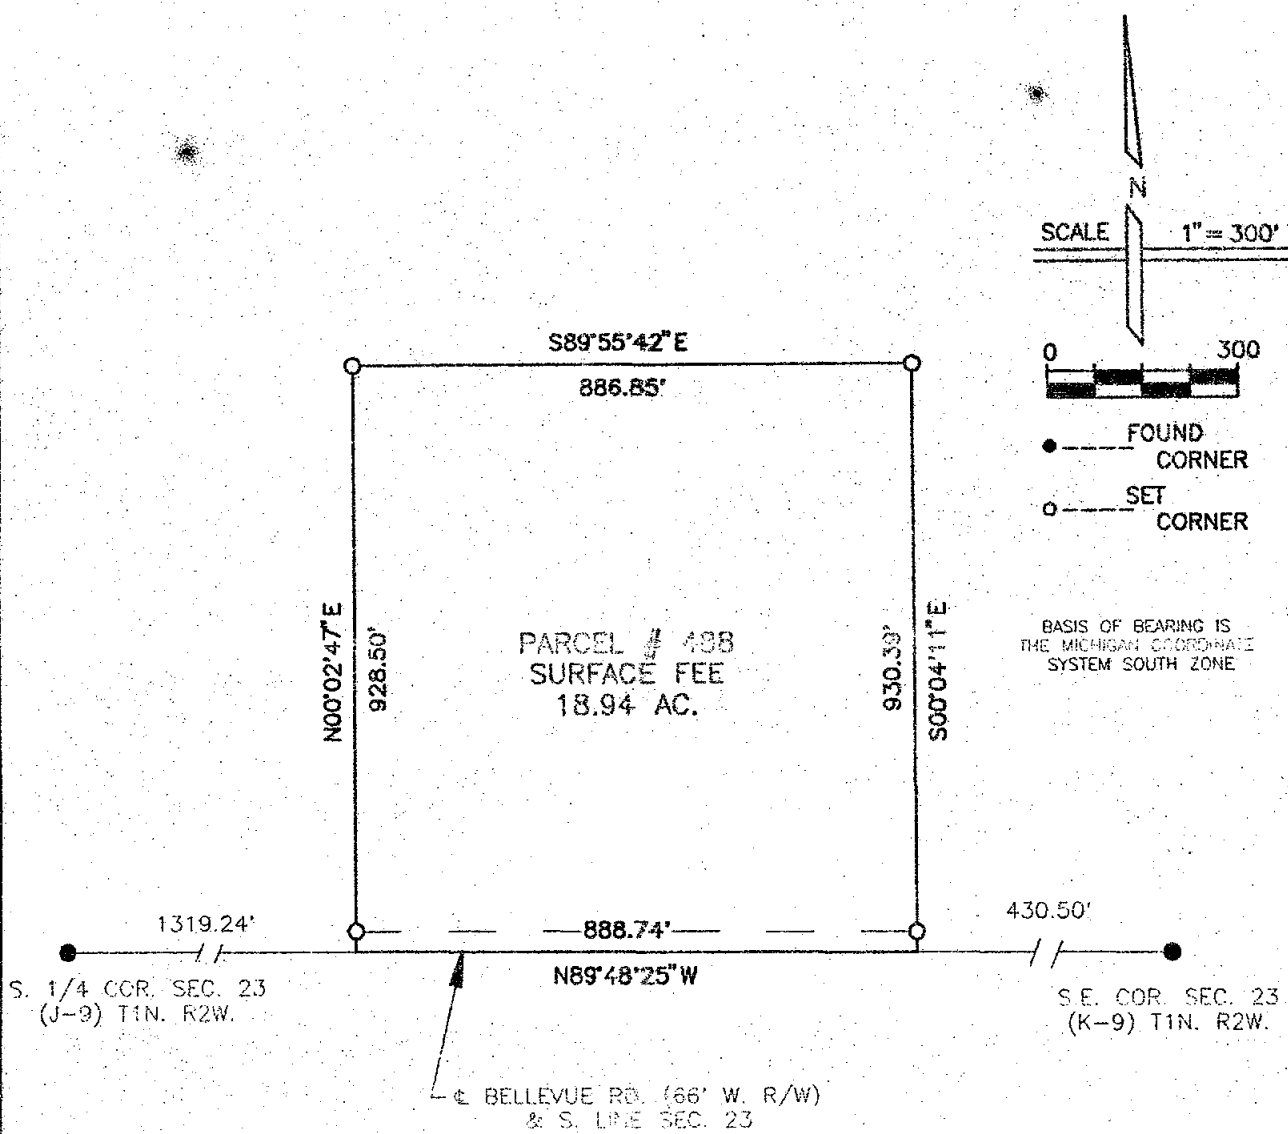Bruce Johnson
INGHAM COUNTY, MICH.A PART OF S.E. 1/4 SEC. 23
T1N. R2W.S. 1/4 COR. SEC. 23
(J-9) T1N. R2W.S.E. COR. SEC. 23
(K-9) T1N. R2W.


Bruce Antcliff

LICENSED SURVEYOR

3574

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 488



SHERIDAN SURVEYING CO.

FOR

GILBERT / COMMONWEALTH

803 West High St. Jackson Michigan 49203

ENGINEERS/CONSULTANTS Reading PA / Jackson M.I.

DATE 11-88

REV. DATE

PAGE 1 OF 2

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF

PARCEL 488

A parcel of land over, across and under a portion of the SE1/4 of Section 23, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the SE Corner of said Section 23; thence along the South line of said Section N89°48'25"W, 430.50 feet to the Point of Beginning; thence continuing along said South line N89°48'25"W, 888.74 feet; thence N00°02'47"E, 928.50 feet; thence S89°55'42"E, 886.85 feet; thence S00°04'11"E, 930.39 feet to the Point of Beginning.

Said parcel contains 18.94 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

S1/4 Corner Section 23 (J-9)


2" Iron Pipe

S 79 E	Nail in 40" Oak	300.80ft.
S 38 E	Nail in Util. Pole	104.90ft.
N 13 E	Angle Iron gate post	26.40ft.
N 48 E	Angle Iron gate post	35.80ft.

SE Corner Section 23 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd.#4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage#3999	100.20ft.



Bruce Antcliff

LICENSED SURVEYOR

3571


SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 488

DATE 11-88

REV. DATE

PAGE 2 OF 2



SHERIDAN SURVEYING CO.

803 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Lansing P.A. / Jackson M.I.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF

LIBER

5 PG 964

CERTIFICATE OF SURVEY

RECORDED


JAN 30 8 57 AM '89

REGISTER OF DEEDS



Paula Johnson

INGHAM COUNTY, MICH.

A PART OF S.E. 1/4 SEC. 23
T1N. R2W.

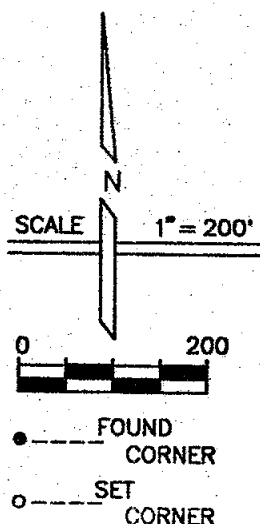

BASIS OF BEARING IS
THE MICHIGAN COORDINATE
SYSTEM SOUTH ZONE

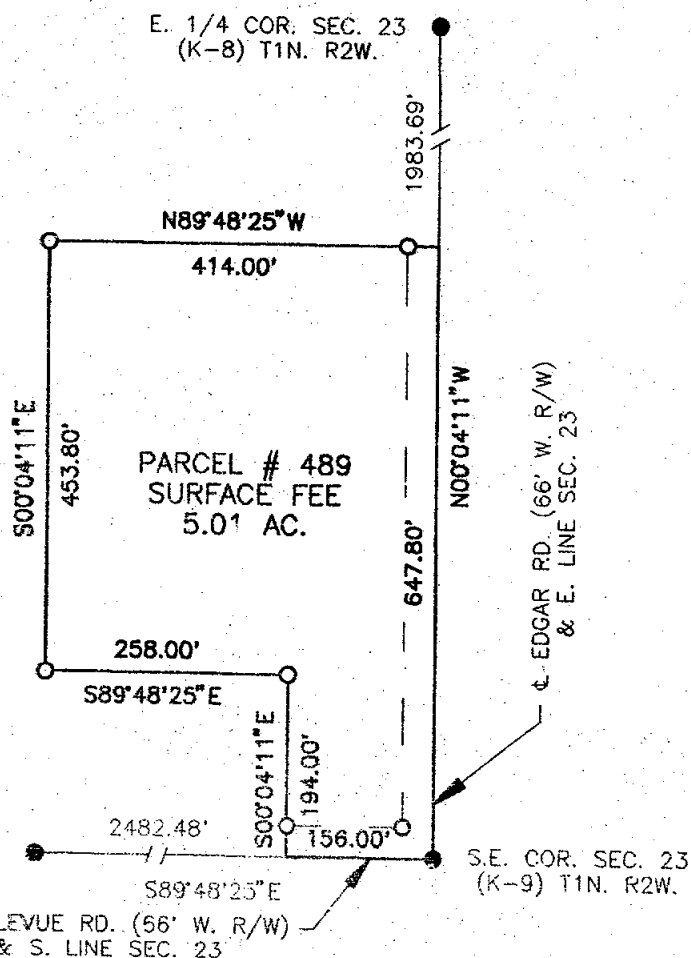

3575

Bruce Antcliff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 489

DATE 11-88

REV. DATE

PAGE 1 OF 2



SHERIDAN SURVEYING CO.

803 West High St.

Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA. / Jackson MI.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF

LIBER

5 065

CERTIFICATE OF SURVEY

PARCEL 489

A parcel of land over, across and under a portion of the SE1/4 of Section 23, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Beginning at the SE Corner of said Section 23; thence along the East line of said Section N00°04'11"W, 647.80 feet; thence N89°48'25"W, 414.00 feet; thence S00°04'11"E, 453.80 feet; thence S89°48'25"E, 258.00 feet; thence S00°04'11"E, 194.00 feet to the South line of said Section 23; thence along said South line S89°48'25"E, 156.00 feet to the Point of Beginning.

Said parcel contains 5.01 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

E1/4 Corner Section 23 (K-8)

1/2" Iron Pipe

N 14 W	Nail in 16" Maple	58.50ft.
S 15 E	Nail in 30" Oak	106.50ft.
N 85 W	Nail in 40" Maple	26.60ft.
S 47 E	Nail in 40" Oak	49.50ft.

S1/4 Corner Section 23 (J-9)


2" Iron Pipe

S 79 E	Nail in 40" Oak	300.80ft.
S 38 E	Nail in Util. Pole	104.90ft.
N 13 E	Angle Iron gate post	26.40ft.
N 48 E	Angle Iron gate post	35.80ft.

SE Corner Section 23 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd. #4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage #3999	100.20ft.

*Bruce Anteliff*

LICENSED SURVEYOR

3575

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 489

DATE 11-88

REV. DATE

PAGE 2 OF 2



SHERIDAN SURVEYING CO.

803 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/ARCHITECTS Reading P.A. / Jackson M.I.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLES WITH ALL THE REQUIREMENTS OF

LIBER

5 PG 968

CERTIFICATE OF SURVEY



RECORDED

JAN 30 8 57 AM '89

REGISTER OF DEEDS

Paul Johnson

INGHAM COUNTY, MICH.

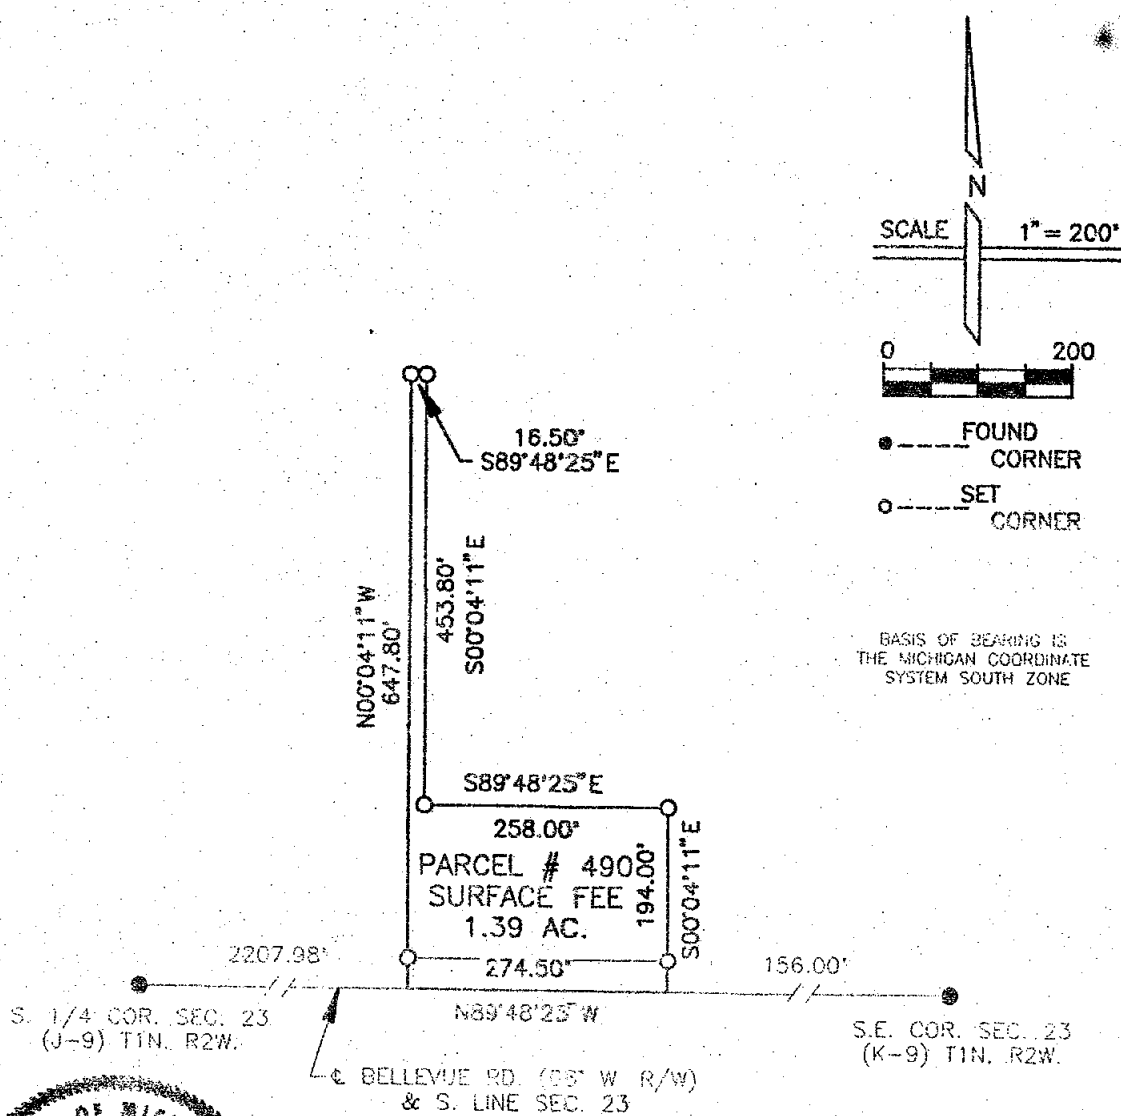A PART OF S.E. 1/4 SEC. 23
T1N. R2W.

3576

Bruce Antcliff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 490

DATE 11-88

REV. DATE

PAGE 1 OF 2

SSU SHERIDAN SURVEYING CO.
003 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/GEODETISTS Reading PA / Jackson MI

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF
P.A. 137 OF 1976.

LIBER

5 967

CERTIFICATE OF SURVEY

PARCEL 490

A parcel of land over, across and under a portion of the SE1/4 of Section 23, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the SE Corner of said Section 23; thence along the South line of said Section N89°48'25"W, 156.00 feet to the Point of Beginning; thence continuing along said South line N89°48'25"W, 274.50 feet; thence N00°04'11"W, 647.80 feet; thence S89°48'25"E, 16.50 feet; thence S00°04'11"E, 453.80 feet; thence S89°48'25"E, 258.00 feet; thence S00°04'11"E, 194.00 feet to the Point of Beginning.

Said parcel contains 1.39 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

S1/4 Corner Section 23 (J-9)


2" Iron Pipe

S 79 E	Nail in 40" Oak	300.80ft.
S 38 E	Nail in Util. Pole	104.90ft.
N 13 E	Angle Iron gate post	26.40ft.
N 48 E	Angle Iron gate post	35.80ft.

SE Corner Section 23 (K-9)

Boat Spike

N 30 W	SE Cor. Hse. Fnd. #4030	93.60ft.
S 01 E	Nail in 40" Locust	28.40ft.
N 57 E	Nail in 24" Maple	48.10ft.
S 19 E	NE Cor. Garage #3999	100.20ft.



Bruce Antcliff
LICENSED SURVEYOR


SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 490

DATE 11-88

REV. DATE

PAGE 2 OF 2



SHERIDAN SURVEYING CO.

603 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Lansing P.A. / Jackson MI

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS

LIBER

5 PG 968

CERTIFICATE OF SURVEY

RECORDED

JAN 30 8 57 AM '89

REGISTER OF DEEDS

Bruce Antcliff

INGHAM COUNTY, MICH.

A PART OF N.E. 1/4 SEC. 35
T1N. R2W.BASIS OF BEARING IS
THE MICHIGAN COORDINATE
SYSTEM SOUTH ZONE

SCALE 1" = 200'

0 200

● FOUND
CORNER○ SET
CORNERN. 1/4 COR. SEC. 35
(J-11) T1N. R2W.E OLDS RD. (66' W. R/W)
& N. LINE SEC. 35N.E. COR. SEC. 35
(K-11) T1N. R2W.

S89°42'12"W

1072.28'

248.00'

1320.28'

PARCEL # 496
SURFACE FEE
4.19 AC.

S00°04'28"E


736.00'

736.00'

N00°04'28"W

248.00'

N89°42'12"E

*Bruce Antcliff*
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 496

DATE 11-88

REV. DATE

PAGE 1 OF 2

SSU SHERIDAN SURVEYING CO.
603 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading P.A. / Jackson M.I.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF
P.L. 121 OF 1970.

PARCEL 496

A parcel of land over, across and under a portion of the NE 1/4 of Section 35, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the NE Corner of said Section 35; thence along the North line of said Section S89°42'12"W, 1320.28 feet to the Point of Beginning; thence continuing along said North line S89°42'12"W, 248.00 feet; thence S00°04'28"E, 736.00 feet; thence N89°42'12"E, 248.00 feet; thence N00°04'28"W, 736.00 feet to the Point of Beginning.

Said parcel contains 4.19 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

N1/4 Corner Section 35 (J-11)


1/2" Rod in Conc.

S 64 W	Nail in 24" Maple	49.00ft.
N 10 E	Nail in Util. Pole	33.10ft.
N 34 E	Nail in 15" Maple	44.50ft.
S 45 E	Nail in 24" Maple	33.90ft.

NE Corner Section 35 (K-11)

1/2" Iron Bar

N 40 W	Nail in 30" Maple	34.90ft.
N 68 W	Nail in 24" Maple	77.80ft.
S 02 W	Angle Iron Post	28.80ft.
S 56 E	Nail in 24" Oak	74.00ft.



Bruce Antcliff

LICENSED SURVEYOR

2577


SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 496

DATE 11-88

REV. DATE

PAGE 2 OF 2



SHERIDAN SURVEYING CO.
503 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA / Jackson MI

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF P.L. 137 OF 1976.

LIBER

5 PG 970

CERTIFICATE OF SURVEY



RECORDED

JAN 30 8 57 AM '89

REGISTER OF DEEDS

Paula Johnson

INGHAM COUNTY, MICH.

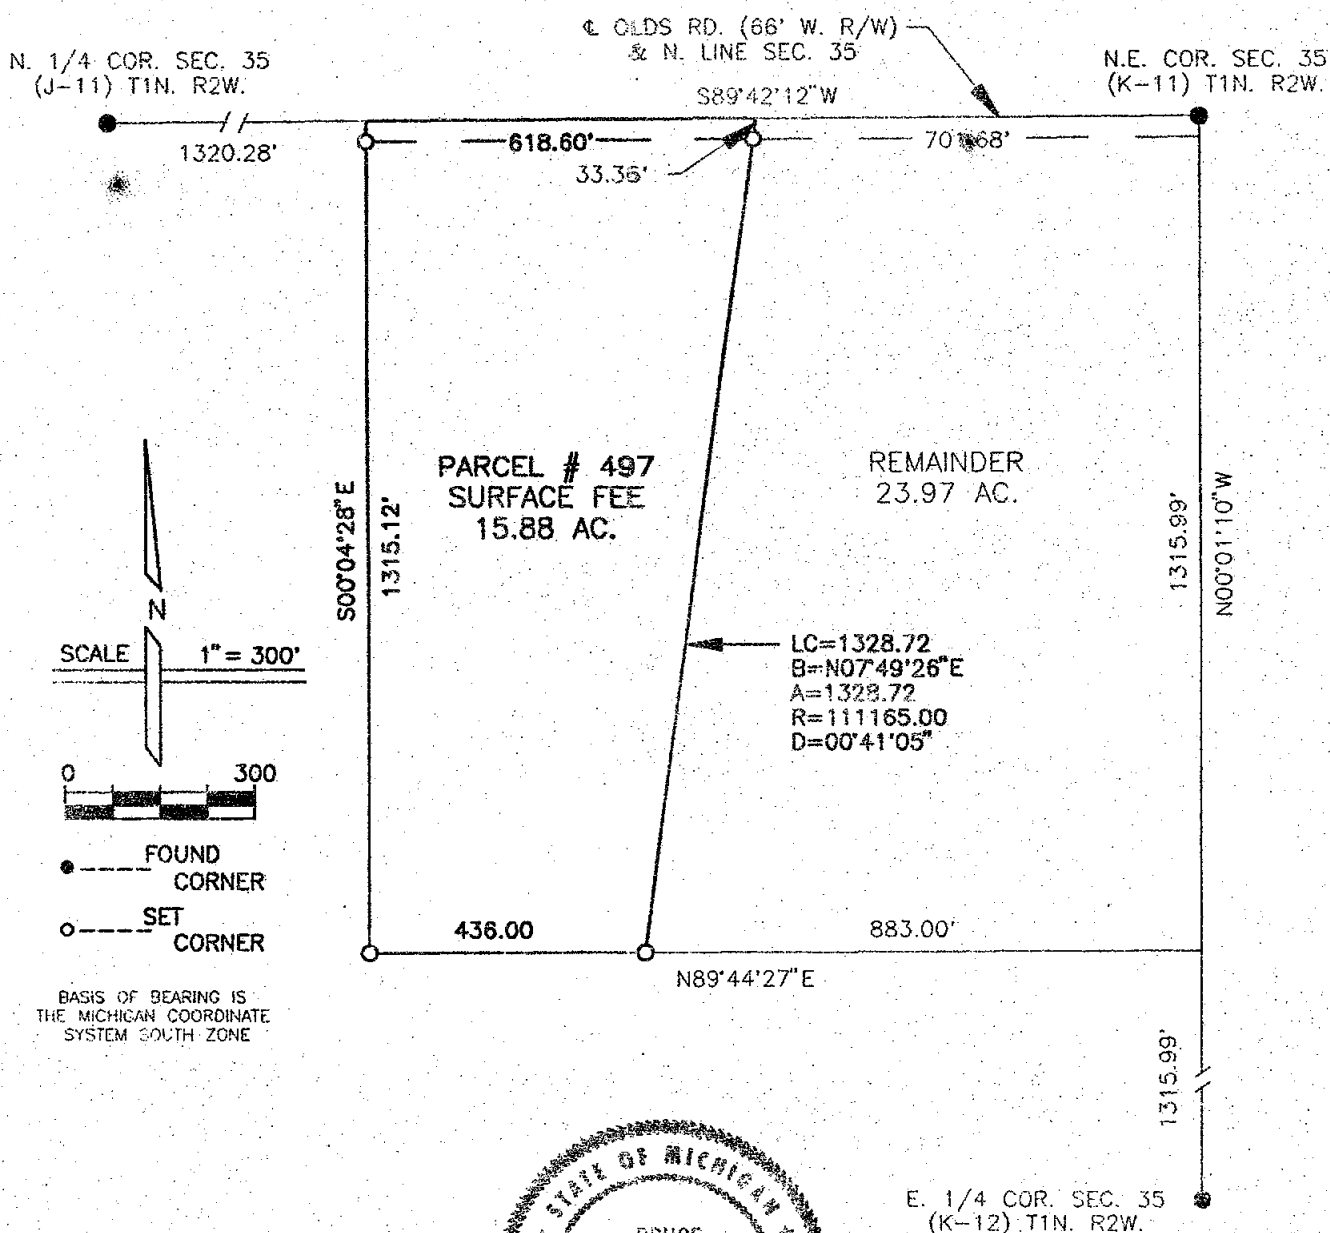A PART OF N.E. 1/4 SEC. 35
T1N. R2W.

3578


Bruce Antcliff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 497

DATE 11-88

REV. DATE



SHERIDAN SURVEYING CO.

205 West High St.

Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA. / Jackson MI.

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF

PARCEL 497

A parcel of land over, across and under a portion of the NE1/4 of Section 35, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the NE Corner of said Section 35; thence along the North line of said Section S89°42'12"W, 701.68 feet to the Point of Beginning; thence continuing along said North line S89°42'12"W, 618.60 feet; thence S00°04'28"E, 1315.12 feet; thence N89°44'27"E, 436.00 feet to a point on a curve concave to the Southeast and having a radius of 111165 feet; thence Northeasterly 1328.72 feet along said curve through a central angle of 00°41'05" to the Point of Beginning.

Said parcel contains 15.88 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

NE Corner Section 35 (K-11)

1/2" Iron Bar

N 40 W	Nail in 30" Maple	34.90ft.
N 68 W	Nail in 24" Maple	77.80ft.
S 02 W	Angle Iron Post	28.80ft.
S 56 E	Nail in 24" Oak	74.00ft.

N1/4 Corner Section 35 (J-11)


1/2" Rod in Conc.

S 64 W	Nail in 24" Maple	49.00ft.
N 10 E	Nail in Util. Pole	33.10ft.
N 34 E	Nail in 15" Maple	44.50ft.
S 45 E	Nail in 24" Maple	33.90ft.

E1/4 Corner Section 35 (K-12)

1" Iron Pipe

N 29 W	Nail in 15" Maple	16.17ft.
N 63 W	Nail in Red Oak	24.70ft.
S 30 W	Nail in root 36" Pignut	4.30ft.
N 48 E	Nail in 24" Red Oak	13.40ft.



Bruce Antcliff
LICENSED SURVEYOR

3578

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 497

DATE 11-88

REV. DATE



SHERIDAN SURVEYING CO.
603 West High St. Jackson Michigan 48203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Lansing, MI / Jackson, MI

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIED WITH ALL THE REQUIREMENTS OF THE MICHIGAN SURVEYING ACT.

50072

CERTIFICATE OF SURVEY


RECORDED

RECEIVED

RECORDS OF DEEDS

INCHAM COUNTY, MICH.

A PART OF N.E. 1/4 SEC. 35
T1N. R2W.

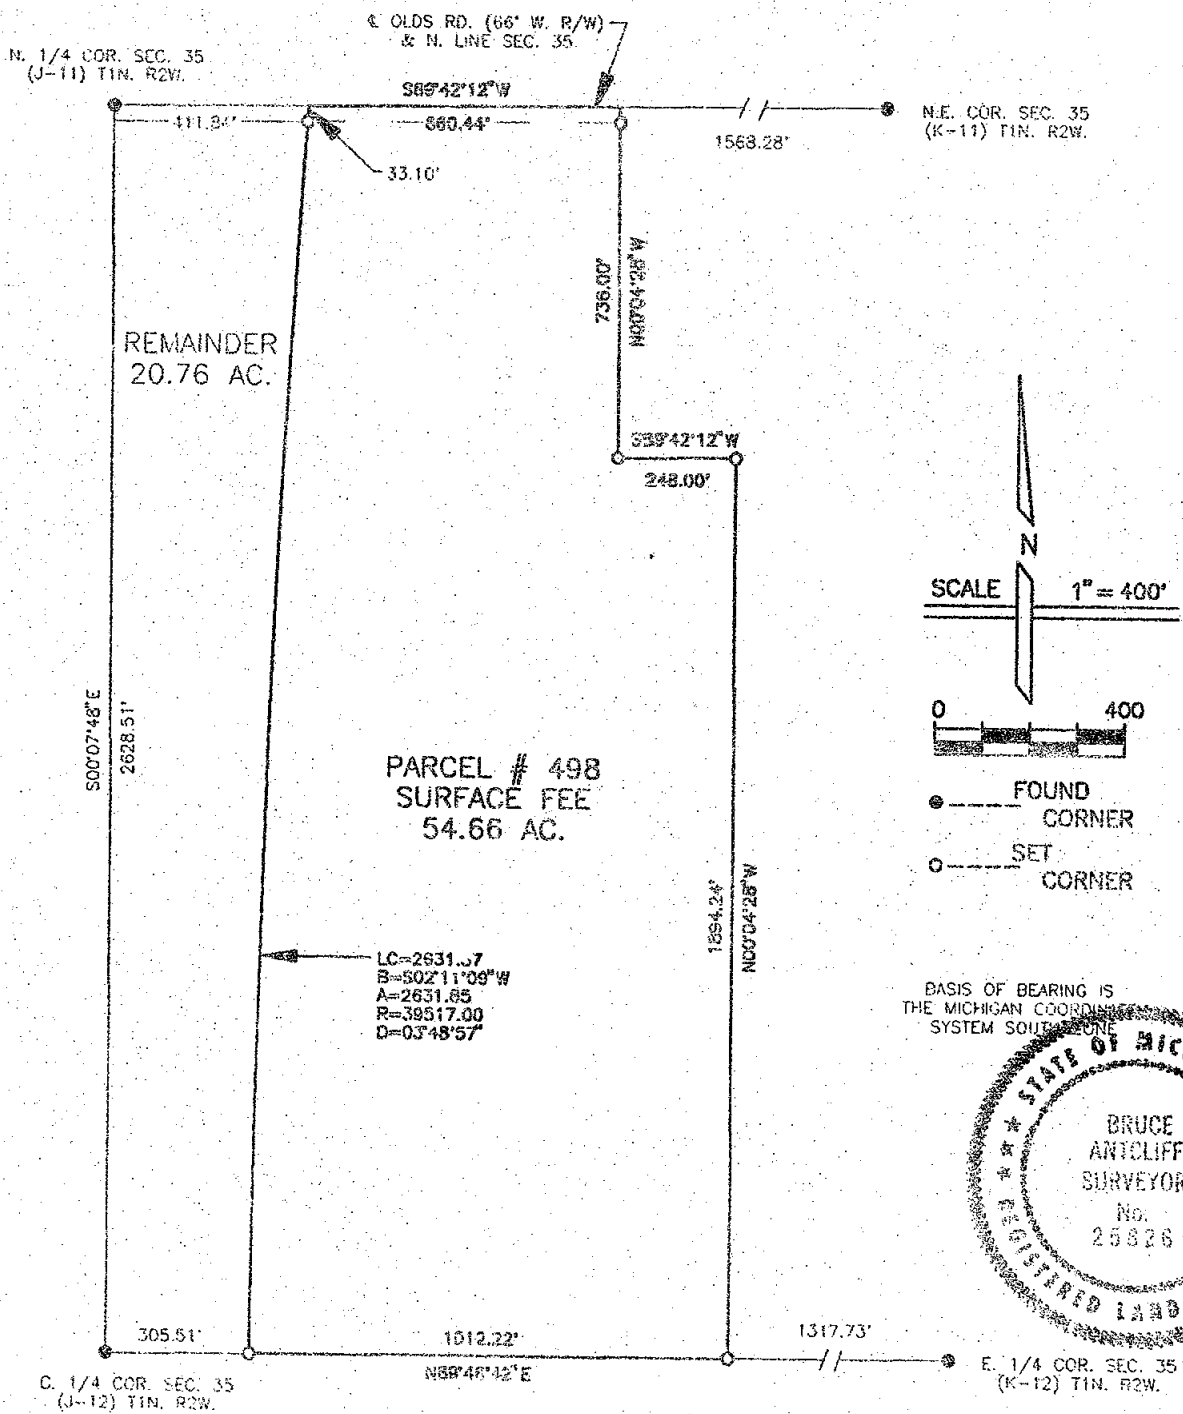

Bruce Patchiff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 498

DATE 11-88

REF. CASE

PAGE 1 OF 2

S&S SHERIDAN SURVEYING CO.
401 West High St. Jackson Michigan 49203

For



GILBERT / COMPTON

URGENT/IMMEDIATE 10:00 PM 10/10/68

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-38 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLIES WITH ALL THE REQUIREMENTS OF

CERTIFICATE OF SURVEY

PARCEL 498

A parcel of land over, across and under a portion of the NE1/4 of Section 35, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the NE Corner of said Section 35; thence along the North line of said Section S89°42'12"W, 1568.28 feet to the Point of Beginning; thence continuing along said North line S89°42'12"W, 660.44 feet to a point on a curve concave to the Southeast and having a radius of 39517 feet; thence Southwesterly 2631.85 feet along said curve through a central angle of 03°48'57" to the E-W 1/4 line of said Section 35; thence along said 1/4 line N89°46'42"E, 1012.22 feet; thence N00°04'28"W, 1894.24 feet; thence S89°42'12"W, 248.00 feet; thence N00°04'28"W, 736.00 feet to the Point of Beginning.

Said parcel contains 54.66 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

N1/4 Corner Section 35 (J-11)

1/2" Rod in Conc.

S 64 W	Nail in 24" Maple	49.00ft.
N 10 E	Nail in Util. Pole	33.10ft.
N 34 E	Nail in 15" Maple	44.50ft.
S 45 E	Nail in 24" Maple	33.90ft.

E1/4 Corner Section 35 (K-12)

1" Iron Pipe

N 29 W	Nail in 15" Maple	16.17ft.
N 63 W	Nail in Red Oak	24.70ft.
S 30 W	Nail in root 36" Pignut	4.30ft.
N 48 E	Nail in 24" Red Oak	13.40ft.

C1/4 Corner Section 35 (J-12)


1-1/2" Iron Pipe

N 04 E	Nail in Util. Pole	93.00ft.
S 87 W	Nail in Util. Pole	7.50ft.
N 50 E	Nail in triple Maple	31.40ft.
N 81 E	Nail in Dbl. Maple	76.20ft.

NE Corner Section 35 (K-11)

1/2" Iron Bar

N 40 W	Nail in 30" Maple	34.90ft.
N 68 W	Nail in 24" Maple	77.80ft.
S 02 W	Angle Iron Post	28.80ft.
S 56 E	Nail in 24" Oak	74.00ft.



Bruce Antcliff

LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 498

DATE 11-88

REV. DATE



SHERIDAN SURVEYING CO.

303 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading P.A. / Jackson MI

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 11-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS

LIBER




5 PG 974

CERTIFICATE OF SURVEY

RECORDED

JAN 30 8 57 AM '89

REGISTER OF DEEDS

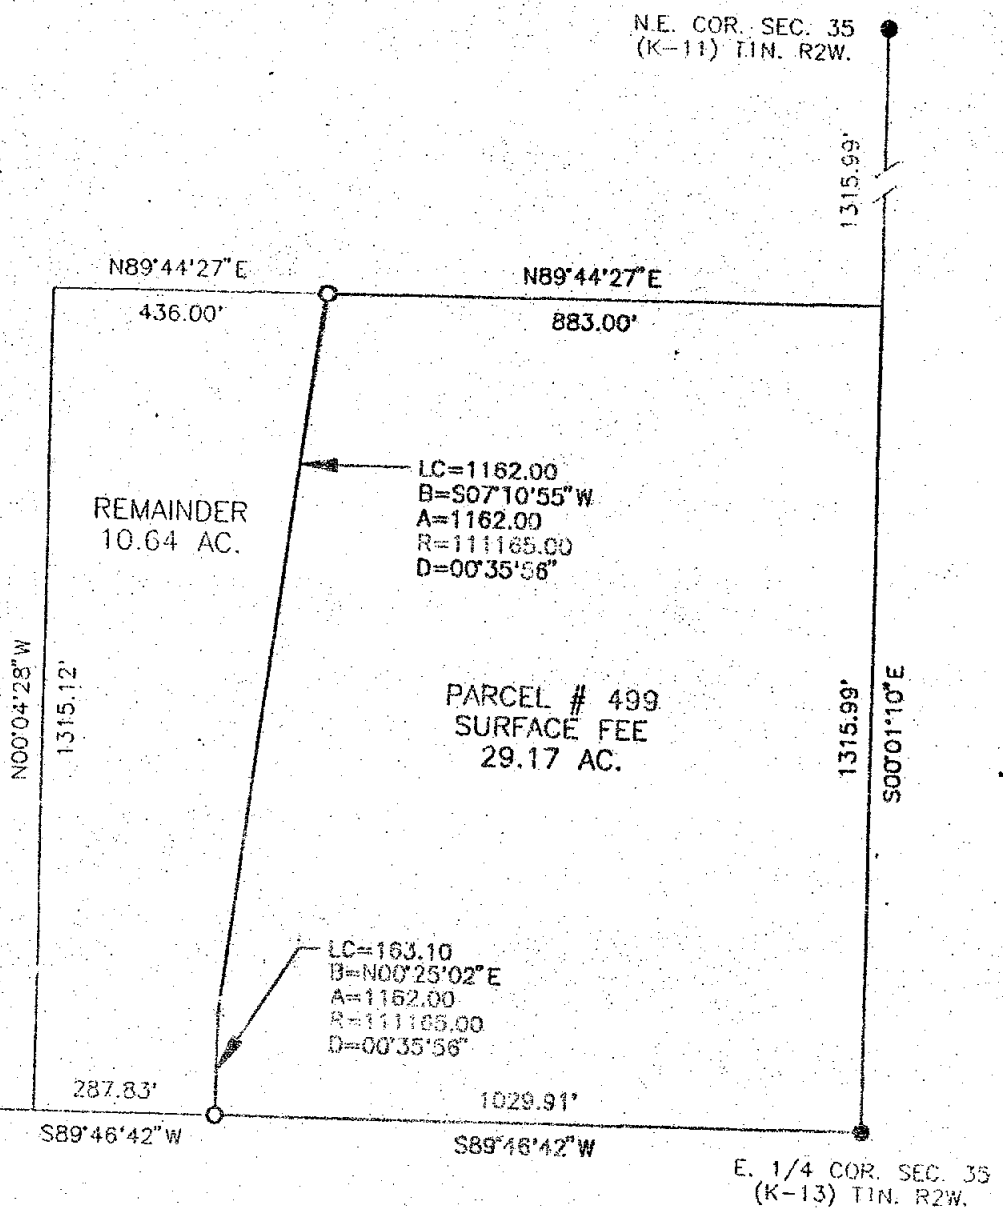* *Paula Johnson*
INGHAM COUNTY, MICH.A PART OF S.E. 1/4 SEC. 35
T1N. R2W.0 300
● FOUND
CORNER
○ SET
CORNERBASIS OF BEARING IS
THE MICHIGAN COORDINATE
SYSTEM SOUTH ZONEC. 1/4 COR. SEC. 35
(J-12) T1N. R2W.

3580

Bruce Antcliff
LICENSED SURVEYOR

SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 499

DATE 10-88

REV. DATE

PAGE 1 OF 2



SHERIDAN SURVEYING CO.

803 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA / Jackson MI

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR
DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS
WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLETES THE PROJECT.

CERTIFICATE OF SURVEY

PARCEL 499

A parcel of land over, across and under a portion of the NE1/4 of Section 35, T1N, R2W, Onondaga Township, Ingham County, Michigan, more particularly described as follows:

Commencing at the E1/4 Corner of said Section 35; thence along the E-W 1/4 line of said Section S89°46'42"W, 1029.91 feet to the Point of Beginning; thence continuing along said 1/4 line S89°46'42"W, 287.83 feet; thence N00°04'28"W, 1315.12 feet; thence N89°44'27"E, 436.00 feet to a point on a curve concave to the Southeast and having a radius of 111165 feet; thence Southwesterly 1162.00 feet along said curve through a central angle of 00°35'56" to a point of intersection with a curve concave to the Southeast and having a radius of 38217 feet; thence Southwesterly 163.10 feet along said curve through a central angle of 00°14'40" to the Point of Beginning.

Said parcel contains 10.64 Acres, more or less.

Subject to easements and restrictions of record.

CORNER WITNESSES

E1/4 Corner Section 35 (K-12)

1" Iron Pipe

N 29 W	Nail in 15" Maple	16.17ft.
N 63 W	Nail in Red Oak	24.70ft.
S 30 W	Nail in root 36" Pignut	4.30ft.
N 48 E	Nail in 24" Red Oak	13.40ft.

C1/4 Corner Section 35 (J-12)


1-1/2" Iron Pipe

N 04 E	Nail in Util. Pole	93.00ft.
S 87 W	Nail in Util. Pole	7.50ft.
N 50 E	Nail in triple Maple	31.40ft.
N 81 E	Nail in Dbl. Maple	76.20ft.

NE Corner Section 35 (K-11)

1/2" Iron Bar

N 40 W	Nail in 30" Maple	34.90ft.
N 68 W	Nail in 24" Maple	77.80ft.
S 02 W	Angle Iron Post	28.80ft.
S 56 E	Nail in 24" Oak	74.00ft.



Bruce Antcliff

LICENSED SURVEYOR

3580


SUPERCONDUCTING SUPER COLLIDER PROJECT

PARCEL # 499

DATE 10-88

REV. DATE

PAGE 2 OF 2



SHERIDAN SURVEYING CO.
803 West High St. Jackson Michigan 49203

FOR



GILBERT / COMMONWEALTH

ENGINEERS/CONSULTANTS Reading PA / Jackson MI

I HEREBY CERTIFY THAT I HAVE SURVEYED THE PARCEL OF LAND AS ABOVE SHOWN OR DESCRIBED ON 10-88 AND THAT THE RATIO OF CLOSURE ON THE UNADJUSTED FIELD OBSERVATIONS WAS 1:10,000 OR BETTER AND THAT THIS SURVEY COMPLETES WITH ALL THE REQUIREMENTS OF

CERTIFICATE OF SURVEY

CENTER OF SEC. 25
T1N, R2W,
ONONDAGA TWP.


Jul 9 8 03 AM '93

REGISTRATION OF DEEDS

Paul J. Smith

MICHIGAN COUNTY, MICH.

RECORDING SPACE

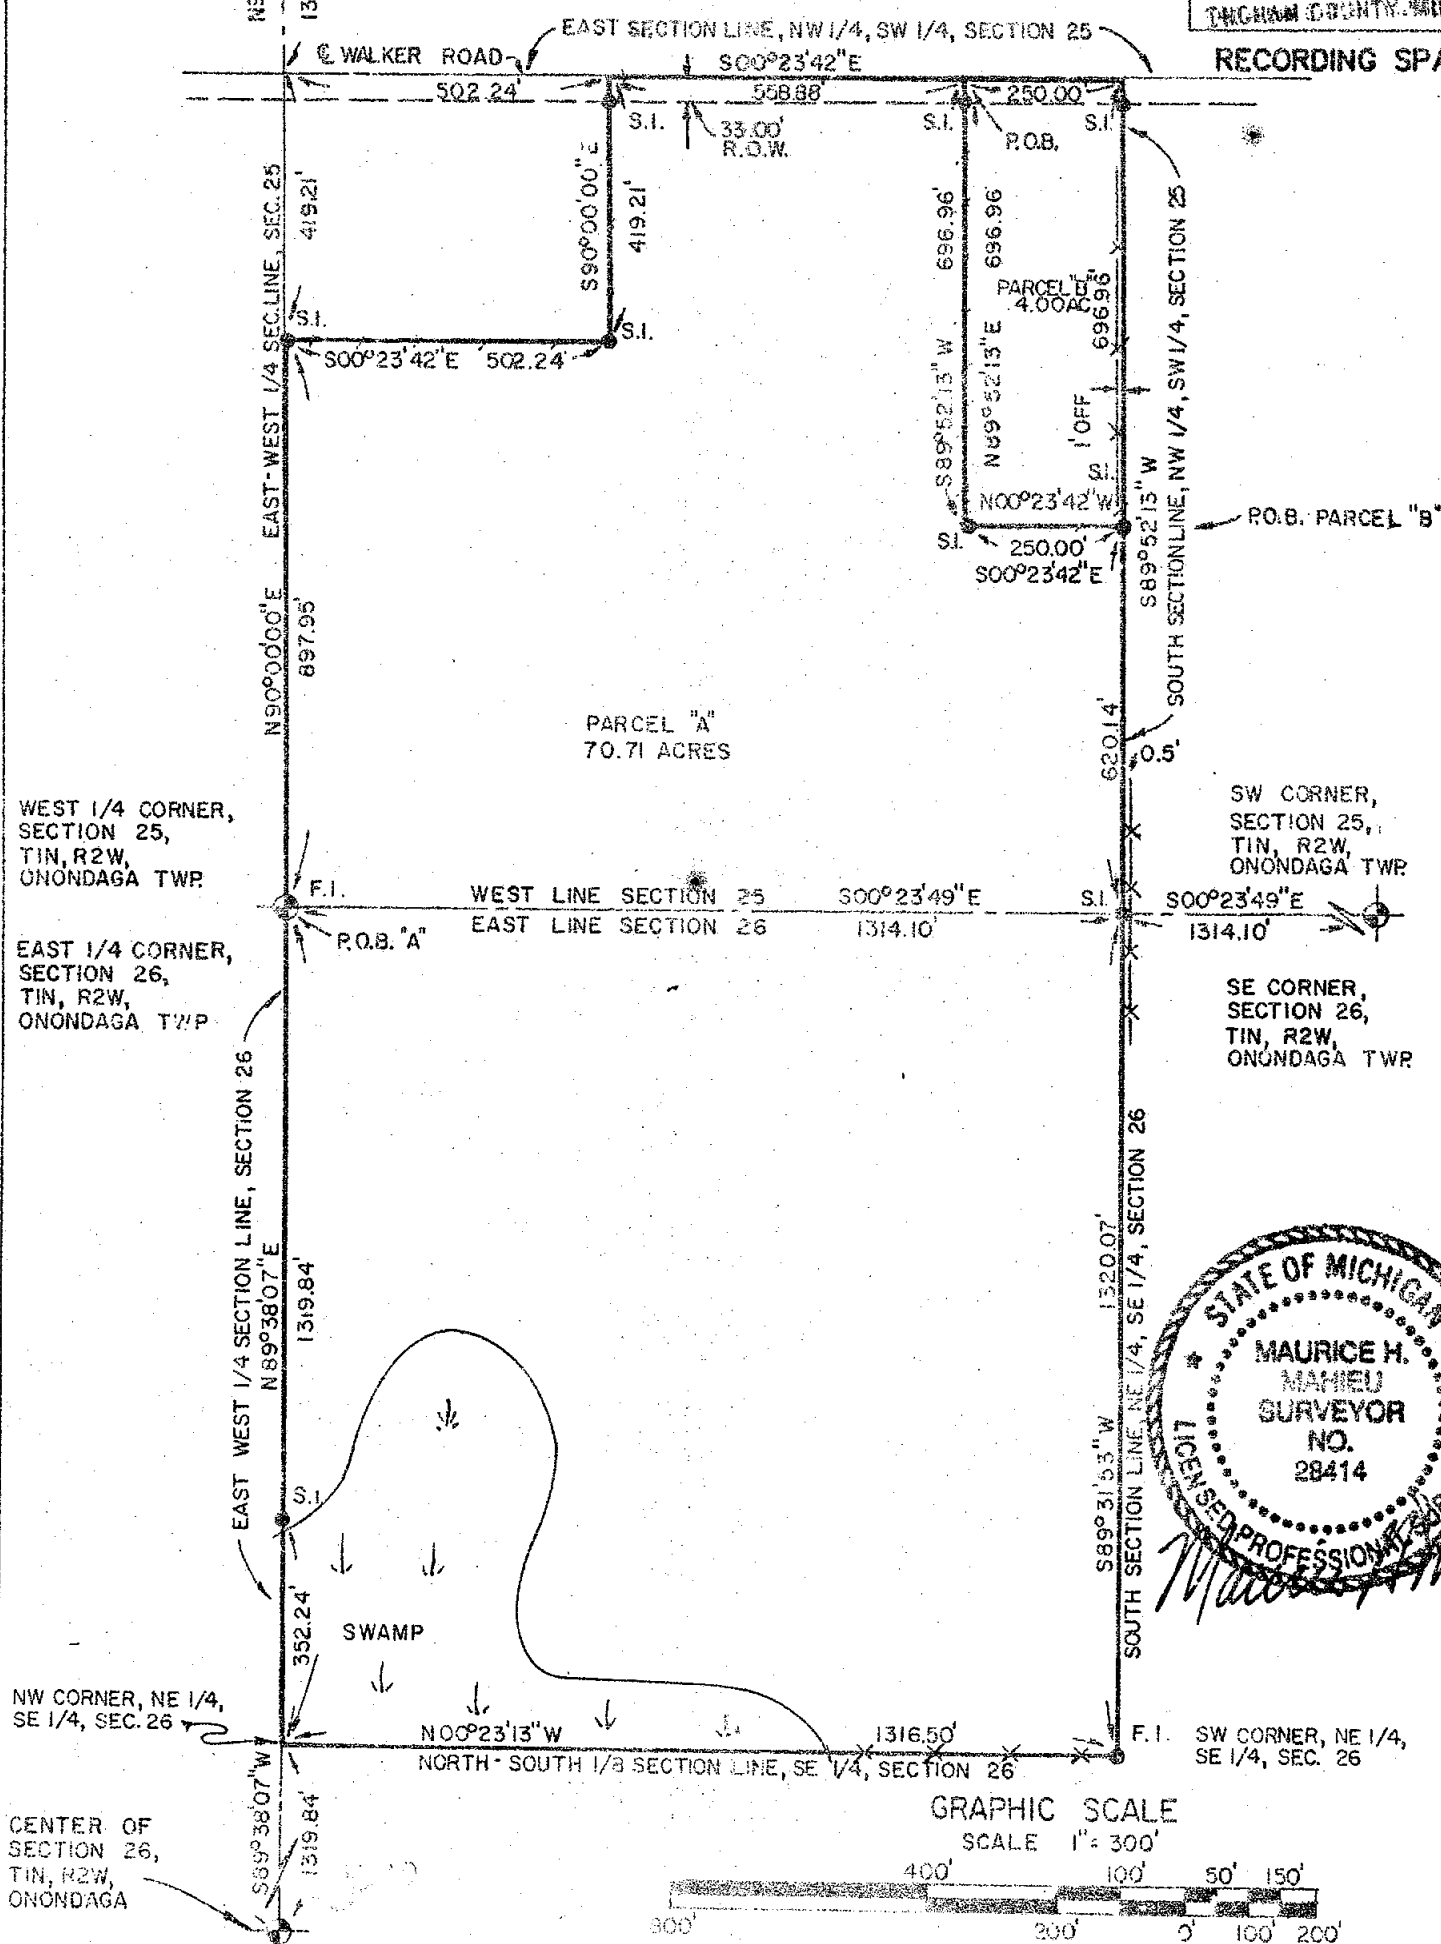

LEGEND

ALL DIMENSIONS ARE IN FEET AND DECIMALS THEREOF
D= DEEDED
P= PLATTED
M= MEASURED
PROPERTY CORNER IRON
CONCRETE MONUMENT
FENCE LINE

FI= FOUND IRON
SI= SET IRON



WOLVERINE ENGINEERS & SURVEYORS, INC.
312 NORTH ST. MASON, MICHIGAN 48854
PHONE (517) 676-9200

SURVEY FOR: KEN & VICKIE VANDENBELT


FIELD SURVEY: T. YOUNG

DATE: 5/5/93

DRAWN BY: J. L. S.

SHEET: 1 OF 3

4344

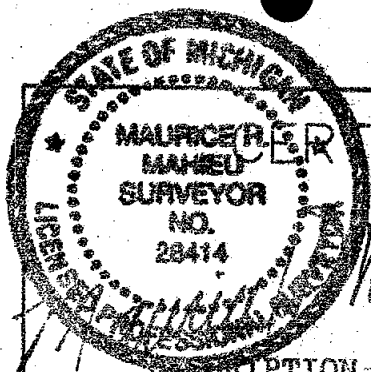

CERTIFICATE OF SURVEY

DESCRIPTION OF PARCELS A & B AS GIVEN THIS OFFICE:

RECORDING SPACE

NE 1/4 SE 1/4, Section 26; NW 1/4 SW 1/4, Section 25, T1N, Onondaga Township, Ingham County, Michigan EXCEPT the following described real estate: Commencing at the W 1/4 post of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan; thence E along E-W 1/4 line of said Section 25 a distance of 897.95 feet to place of beginning of this description; thence continuing E along E-W 1/4 line of said Section 25, a distance of 433.66 feet to the W 1/8 line of said Section 25; thence S 00 deg. 43' 40" W along said W 1/4 line a distance of 502.24 feet; thence W 433.66 feet; thence N 00 deg. 43' 40" E a distance of 502.24 feet to the place of beginning of this description.

This property was field surveyed and divided into two parcels and are described as follows:

PARCEL A:

The Northeast 1/4 of the Southeast 1/4 of Section 26 and a part of the Northwest 1/4 of the Southwest 1/4 of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan described as follows; beginning at the West 1/4 corner of Section 25; thence N 90 deg. 00' 00" E 897.95 feet along the East-West 1/4 line; thence S 00 deg. 23' 42" E 502.24 feet parallel with the East line of said Northwest 1/4 of the Southwest 1/4; thence S 90 deg. 00' 00" E 419.21 feet parallel with the East-West 1/4 line; thence S 00 deg. 23' 42" E 558.88 feet along said East line; thence S 89 deg. 52' 13" W 696.96 feet parallel with the South line of said Northwest 1/4 of the Southwest 1/4; thence S 00 deg. 23' 42" E 250.00 feet parallel with said East line to said South line; thence S 89 deg. 52' 13" W 620.14 feet along said South line to the line common to Section 25 and 26; thence S 89 deg. 31' 53" W 1,320.07 feet to the Southwest corner of the Northeast 1/4 of the Southeast 1/4 of Section 26; thence N 00 deg. 23' 13" W 1,316.50 feet to the Northwest corner of said Northeast 1/4 of the Southeast 1/4 of Section 26; thence N 89 deg. 38' 07" E 1,319.84 feet to the point of beginning; containing 70.71 acres of land, more or less, and subject to any easement or rights-of-way of record.

PARCEL B:

A part of the Northeast 1/4 of the Southeast 1/4 of Section 25, T1N, R2W, Onondaga Township, Ingham County, Michigan described as beginning on the South line of the NW 1/4 of the SW 1/4 of Section 26 at a point S 00 deg. 23' 49" E 1314.10 feet along the West line of Section 25 and N 89 deg. 52' 13" E 620.14 feet from the West 1/4 corner of Section 25; thence N 00 deg. 23' 42" W 250.00 feet parallel with the East line of said Northwest 1/4 of the Southwest 1/4; thence N 89 deg. 52' 13" E 696.96 feet parallel with said South line to the East line of said Northwest 1/4 of the Southwest 1/4; thence S 00 deg. 23' 42" E 250.00 feet along said West line; thence S 89 deg. 52' 13" W 696.96 feet to a point of beginning, containing 4.00 acres of land, more or less, and subject to any easement or rights-of-way of record.

LEGEND

ALL DIMENSIONS ARE IN FEET AND DECIMALS THEREOF
 D= DEEDED
 P= PLATTED
 M= MEASURED
 PROPERTY CORNER IRON
 CONCRETE MONUMENT
 FENCE LINE

FI= FOUND IRON
 SI= SET IRON



WOLVERINE ENGINEERS & SURVEYORS, INC.
 312 NORTH ST. MASON, MICHIGAN 48854
 PHONE (517) 676-9200


SURVEY FOR: Ken & Vickie Vandenberg

FIELD SURVEY: T. Young

DATE: 5/5/93

DRAWN BY: J.L.S.

SHEET: 2 of 3

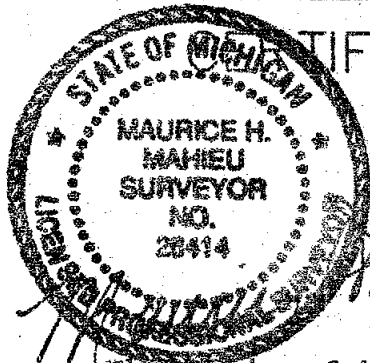

CERTIFICATE OF SURVEY

RECORDING SPACE

The basis of bearing for this survey is assumed to be the East-West 1/4 Section line of Section 25 which bears S 90 deg. 00' 00" W.

I hereby certify that I have surveyed and mapped the land above platted and/or described on April 7, 1993, and that the ratio of closure on the unadjusted field observations of such survey was 1/10,000, and that all of the requirements of P.A. 132, 1970 have been complied with.

Maurice H. Mahieu, P.S. #28414

S.W. Corner, Section 25
Onondaga Twp, T1N, R2W
Ingham County, Mi

Found 1/2" Iron Rod

Witnessed By:

N&T #25832 S.Side 36" Maple,
N 70 deg. W, 77.83'
N&T #28414 S.Side 42" Maple,
N 20 deg. W, 33.47'
Steel Fence Corner Post,
S, 28.63'
N&T #18998 N.Side 32" Oak,
S 60 deg. E, 73.90'

Center of Section 25, Sec.25
T1N,R2W Onondaga Twp,
Ingham County, Mi

Found 1" Pipe w/Cap #28409

Witnessed By:

N&T in W. Side 10" Elm,
N 10 deg. E, 38.51'
N&T in N. Side 16" Cherry,
East, 34.83'
N&T in S. Side Corner Fence
post, West, 19.61'
N&T in S.Side 12" Elm,
N 55 deg. W, 21.76'

W 1/4 Corner, Section 25
Onondaga Twp, T1N, R2W
Ingham County, Mi

Found 1" Pipe w/Cap #28409

Witnessed By:

N&T in E.Side 13" Maple,
S 25 deg. W, 5.79'
N&T in SW Side 6" Maple,
N 30 deg. W, 11.93'
N&T in SW Side (2) 6" Maple,
S, 45 deg. E, 19.00'
N&T in E.Side 12" Elm,
S 22.29'

Center of Section 26,
T1N,R2W Onondaga Twp,
Ingham County, Mi

Found 1/2" Iron Rod w/cap
#18998

Witnessed By:

N&T in N. Side 12" Oak,
N 80 deg. W, 10.60'
N&T in N. Side 12" Cherry,
N 70 deg. E, 29.20'
N&T in E. Side (2) 14" Oak
S 10 deg. E, 26.40'
N&T in W.Side 24" Oak,
N 10 deg. E, 55.10'

LEGEND

ALL DIMENSIONS ARE IN FEET AND DECIMALS THEREOF
D= DEEDED
P= PLATTED
M= MEASURED
PROPERTY CORNER IRON
CONCRETE MONUMENT

FI= FOUND IRON
SI= SET IRON



WOLVERINE ENGINEERS & SURVEYORS, INC
312 NORTH ST. MASON, MICHIGAN 48854
PHONE (517) 676-9200

SURVEY FOR: Ken & Vickie Vandenberg

FIELD SURVEY: J. Young



DATE: 5/5/93

DRAWN BY: J. Young

SHEET: 1

CERTIFICATE OF SURVEY

PART OF THE W 1/2 OF THE NW 1/4 SEC 25, T1N, R2W
ONONDAGA TWP., INGHAM CO., MICHIGAN.

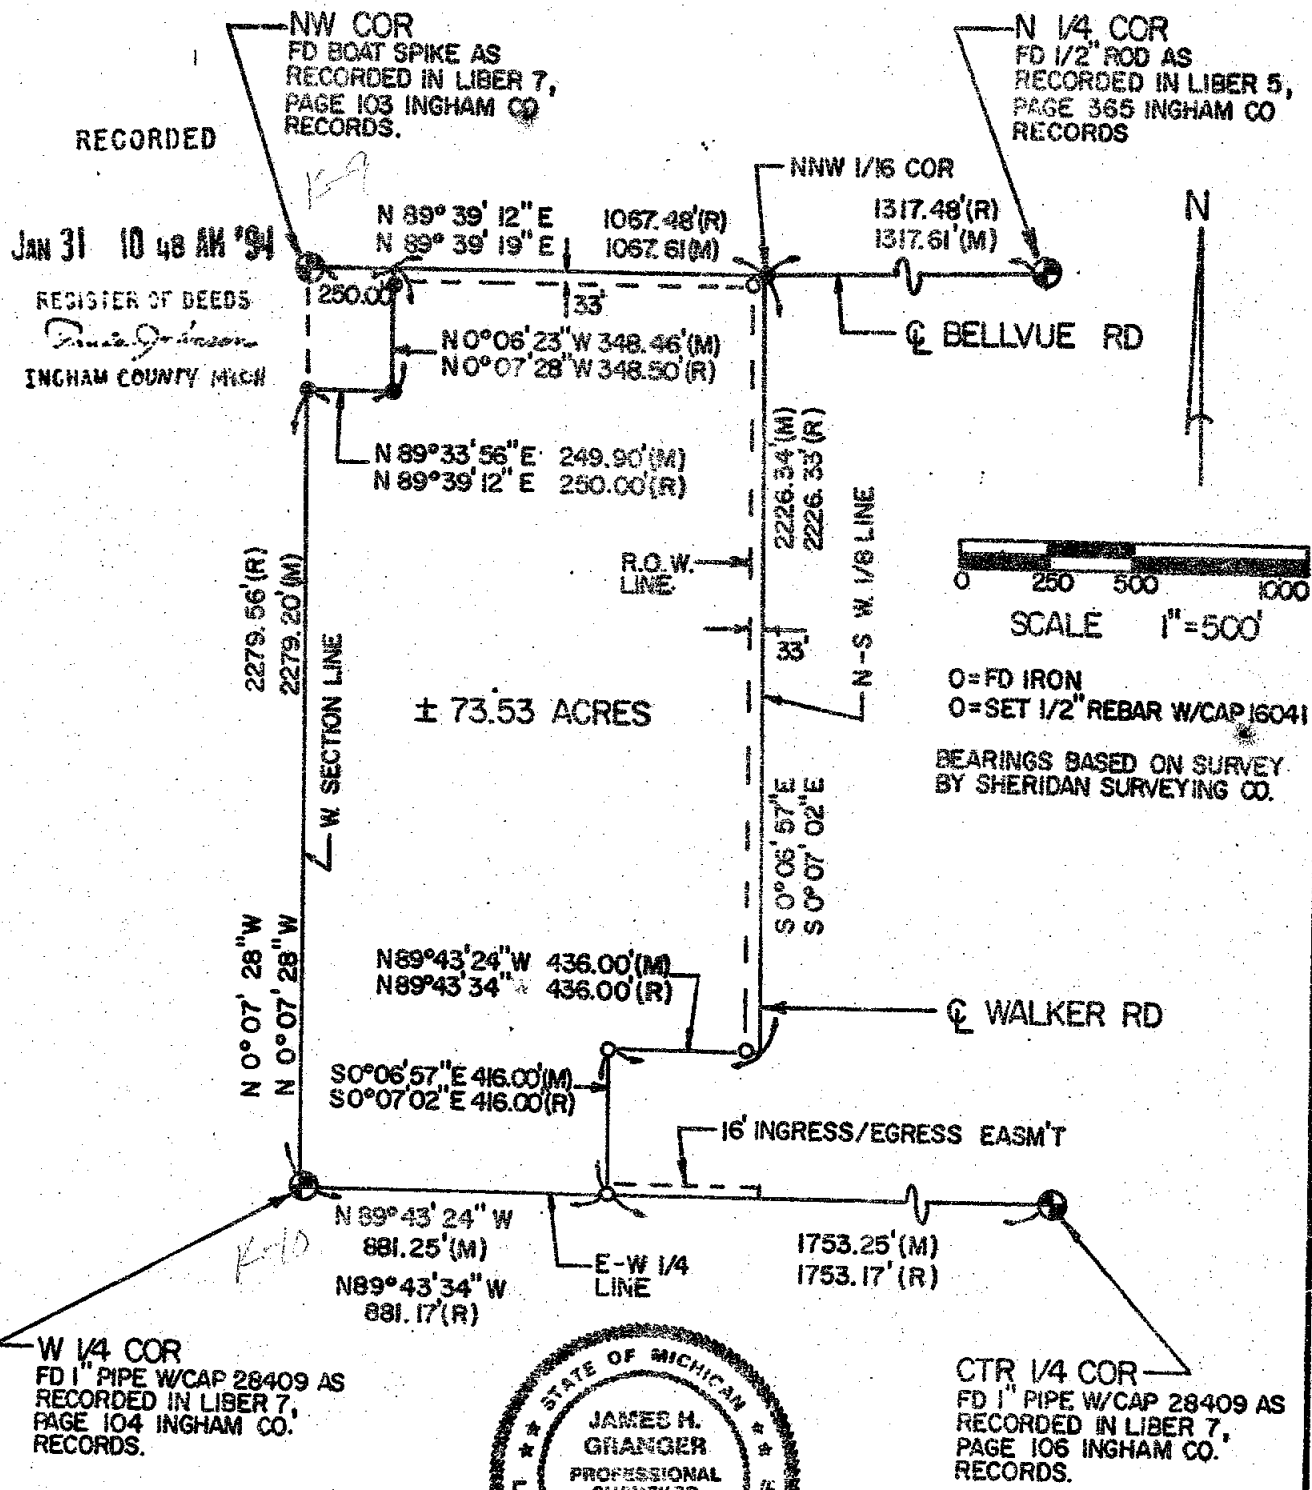

I hereby certify that I have surveyed and mapped the land platted and/or described on JAN 3, 19 94, that the ratio of closure on the unadjusted field observations was 1/92,861 and that all of the requirements of P.A. 132 of 1970, as amended, have been complied with.

COPYRIGHTED GRANGER & ASSOCIATES INC. 1994

James H. Granger 4397
JAMES H. GRANGER P.E. P.S. 16041

STATE OF MICHIGAN	RECORDED	DAY OF
COUNTY OF		A.D., 19
REGISTER OF DEEDS	AT	O'CLOCK M.

SURVEY FOR:
FMHA - INGHAM CO

Granger and Associates, Inc.
Architects • Engineers • Surveyors
P.O. Box 276 224 S. Main 211 Newman

SEC. 25	T 1 N	R 2 W
DRAWN	SG	Sheet 1 of 2

DATE: JAN 5, 1994


CERTIFICATE OF SURVEY
PART OF THE W1/2 OF THE NW 1/4 SEC 25, T1N, R2W
ONONDAGA TWP., INGHAM CO., MICHIGAN.

LEGAL DESCRIPTION

Part of the West 1/2 of the Northwest 1/4 of Section 25, T1N, R2W, Onondaga Twp., Ingham Co., Michigan described as commencing at the Northwest corner of said section; Thence N 89°39'19"E, along the North line of said section, 250.00 ft., to the Point of Beginning; Thence continuing along said North line, N 89°39'19"E 1067.61 ft., to the NNW 1/16 corner; Thence S 00°06'57"E, along the N-S West 1/8 line of said section, 2226.34 ft.; Thence N 89°43'24"W 436.00 ft.; Thence S 00°06'57"E 416.00 ft., to the E-W 1/4 line of said section; Thence N 89°43'24"W, along said E-W 1/4 line, 381.25 ft., to the West 1/4 corner of said section; Thence N 00°07'28"W, along the West line of said section, 2279.20 ft.; Thence N 89°33'56"E 249.90 ft.; Thence N 00°06'23"W 348.46 ft., to the North line of said section and the P.O.B. Contains 73.53 acres, more or less.

Subject to R.O.W. for Bellvue and Walker Roads.
Subject to Restrictions, Reservations and Easements of record, if any.

ALSO an easement for the purpose of Ingress and Egress over and across the South 16 feet of the East 436 feet of the South 416 feet of the West 1/2 of the Northwest 1/4 of section 25, T1N, R2W.



4397

COPYRIGHTED GRANGER & ASSOCIATES INC. 1994

James H. Granger
JAMES H. GRANGER P.E. PS. 16041

SURVEY FOR:
FMHA - INGHAM CO
DATE: JAN 5, 1994

Granger and Associates, Inc.
Architects • Engineers • Surveyors
P.O. Box 276 324 S. Main 211 N. Main
St. Ignace, MI 49781 • Charlevoix, MI 49721 • E. Tawas, MI 49770

sec. 25	T1N	R2W
DRAWN		Sheet 2 of 2
COMPUTED		Job C15860

CERTIFICATE OF SURVEY

PART OF THE SE 1/4, SECTION 23, T1N, R2W
ONONDAGA TWP., INGHAM CO., MICHIGAN.

RECORDED

JAN 31 10 48 AM '94

REGISTER OF DEEDS

Ingham County, Mich.

S 89° 55' 42" E
S 89° 56' 16" E

886.85'(R)

886.55'(M)

928.46'(M)
928.50'(R)930.39'(R)
930.53'(M)

± 18.94 ACRES

0 150 300 600

SCALE 1"=300'

S. 1/4 COR.
FD 1 1/2" WELL PT. AS
RECORDED IN LIBER 3,
PAGE 511 INGHAM CO.
RECORDS.N 0° 03' 42" E
N 0° 02' 47" E

S. SECTION LINE

R.O.W. LINE

S 0° 04' 11" E
S 0° 04' 15" E

● = FD IRON W/CAP 25826

○ = SET 1/2" REBAR W/CAP 15041

BEARINGS BASED ON SURVEY
BY SHERIDAN SURVEYING CO.1319.38'(M)
1319.24'(R)N 89° 48' 16" W
N 89° 48' 25" W888.71'(M)
888.74'(R)430.67'(M)
430.50'(R)

BELLVUE RD


SE COR.
FD BOAT SPIKE AS
RECORDED IN LIBER 7,
PAGE 103 INGHAM CO.
RECORDS.

LEGAL DESCRIPTION

Part of the Southeast 1/4 of Section 23, T1N, R2W, Onondaga Twp., Ingham Co., Michigan described as commencing at the Southeast corner of said section; Thence N 89° 48' 16" W, along the South line of said section, 430.67 ft., to the Point of Beginning; Thence continuing along said South line, N 89° 48' 16" W 888.71 ft.; Thence N 00° 03' 42" E 928.46 ft.; Thence S 89° 56' 16" E 886.55 ft.; Thence S 00° 04' 15" E 930.53 ft., to the South line of said section and the P.O.B. Contains 18.94 acres, more or less.

Subject to R.O.W. for Bellvue Road.

Subject to Restrictions, Reservations and Easements of record, if any.



I hereby certify that I have surveyed and mapped the land platted and/or described on JAN 3, 1994, that the ratio of closure on the unadjusted field observations was 1/92,861 and that all of the requirements of P.A. 132 of 1970, as amended, have been complied with.

COPYRIGHTED GRANGER & ASSOCIATES INC. 1994

James H. Granger
JAMES H. GRANGER R.E. PS. 16041

STATE OF MICHIGAN	)	RECORDED	DAY OF
COUNTY OF	)	A.D., 19	
REGISTER OF DEEDS		AT	O'CLOCK M.

SURVEY FOR:
FMHA - INGHAM CO.
4398

DATE: JAN 5 1994

Granger and Associates, Inc.
Architects • Engineers • Surveyors

P.O. Box 276

224 S. Main

211 Newman

SEC. 23 T1N R2W

DRAWN SG Sheet 1 of 1

LIBER

7 82

RECORDED

CERTIFICATE OF SURVEY

PART OF THE NE 1/4, SECTION 26, T1N, R2W
ONONDAGA TWP., INGHAM CO., MICHIGAN.

JAN 31


JAN 31 10 48 AM '94

REGISTER OF DEEDS

Dennis Johnson


INGHAM COUNTY, MICH.

NE COR.

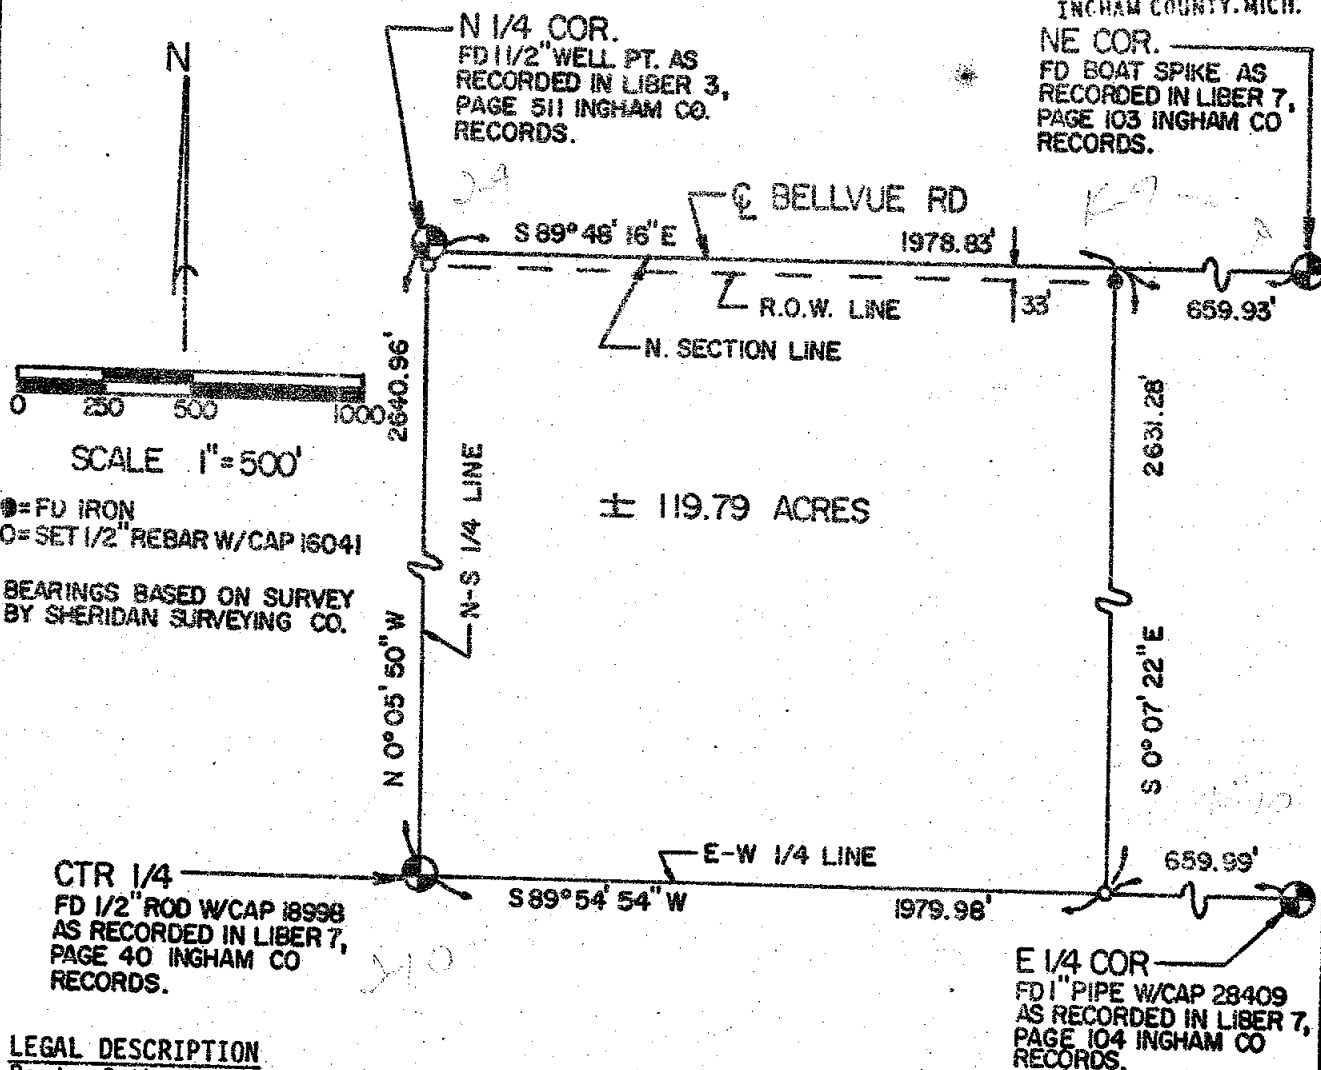FD BOAT SPIKE AS
RECORDED IN LIBER 7,
PAGE 103 INGHAM CO
RECORDS.N 1/4 COR.
FD 1 1/2" WELL PT. AS
RECORDED IN LIBER 3,
PAGE 511 INGHAM CO.
RECORDS.

LEGAL DESCRIPTION

Part of the Northeast 1/4 of Section 26, T1N, R2W, Onondaga Twp., Ingham Co., Michigan described as beginning at the North 1/4 corner of said section; Thence S 89° 48' 16" E, along the North line of said section, 1978.83 ft.; Thence S 00° 07' 22" E 2631.28 ft., to the E-W 1/4 line of said section; Thence S 89° 54' 54" W, along said E-W 1/4 line, 1979.98 ft., to the Center 1/4 corner of said section; Thence N 00° 05' 50" W, along the N-S 1/4 line of said section, 2640.96 ft., to the North 1/4 corner and the P.O.B. Contains 119.79 acres, more or less. Subject to R.O.W. for Bellvue Road. Subject to Restrictions, Reservations and Easements of record, if any.



I hereby certify that I have surveyed and mapped the land platted and/or described on JAN 3, 1994, that the ratio of closure on the unadjusted field observations was 1/92,861 and that all of the requirements of P.A. 132 of 1970, as amended, have been complied with.

COPYRIGHTED GRANGER & ASSOCIATES INC. 1994

James H. Granger
JAMES H. GRANGER PEY/PS. 16041STATE OF MICHIGAN) RECORDED _____ DAY OF
COUNTY OF _____) _____ A.D., 19 _____
REGISTER OF DEEDS AT _____ O'CLOCK _____ M.

SURVEY FOR:

FMHA-INGHAM CO
1999Granger and Associates, Inc.
Architects • Engineers • Surveyors

P.O. Box 276

224 S. Main

211 Newman

SEC. 26 T1N R2W

DRAWN


SG

Sheet

1 of 1

CERTIFICATE OF SURVEY

For: Barbara Sears
LEGAL DESCRIPTION: (See Sheet 1)

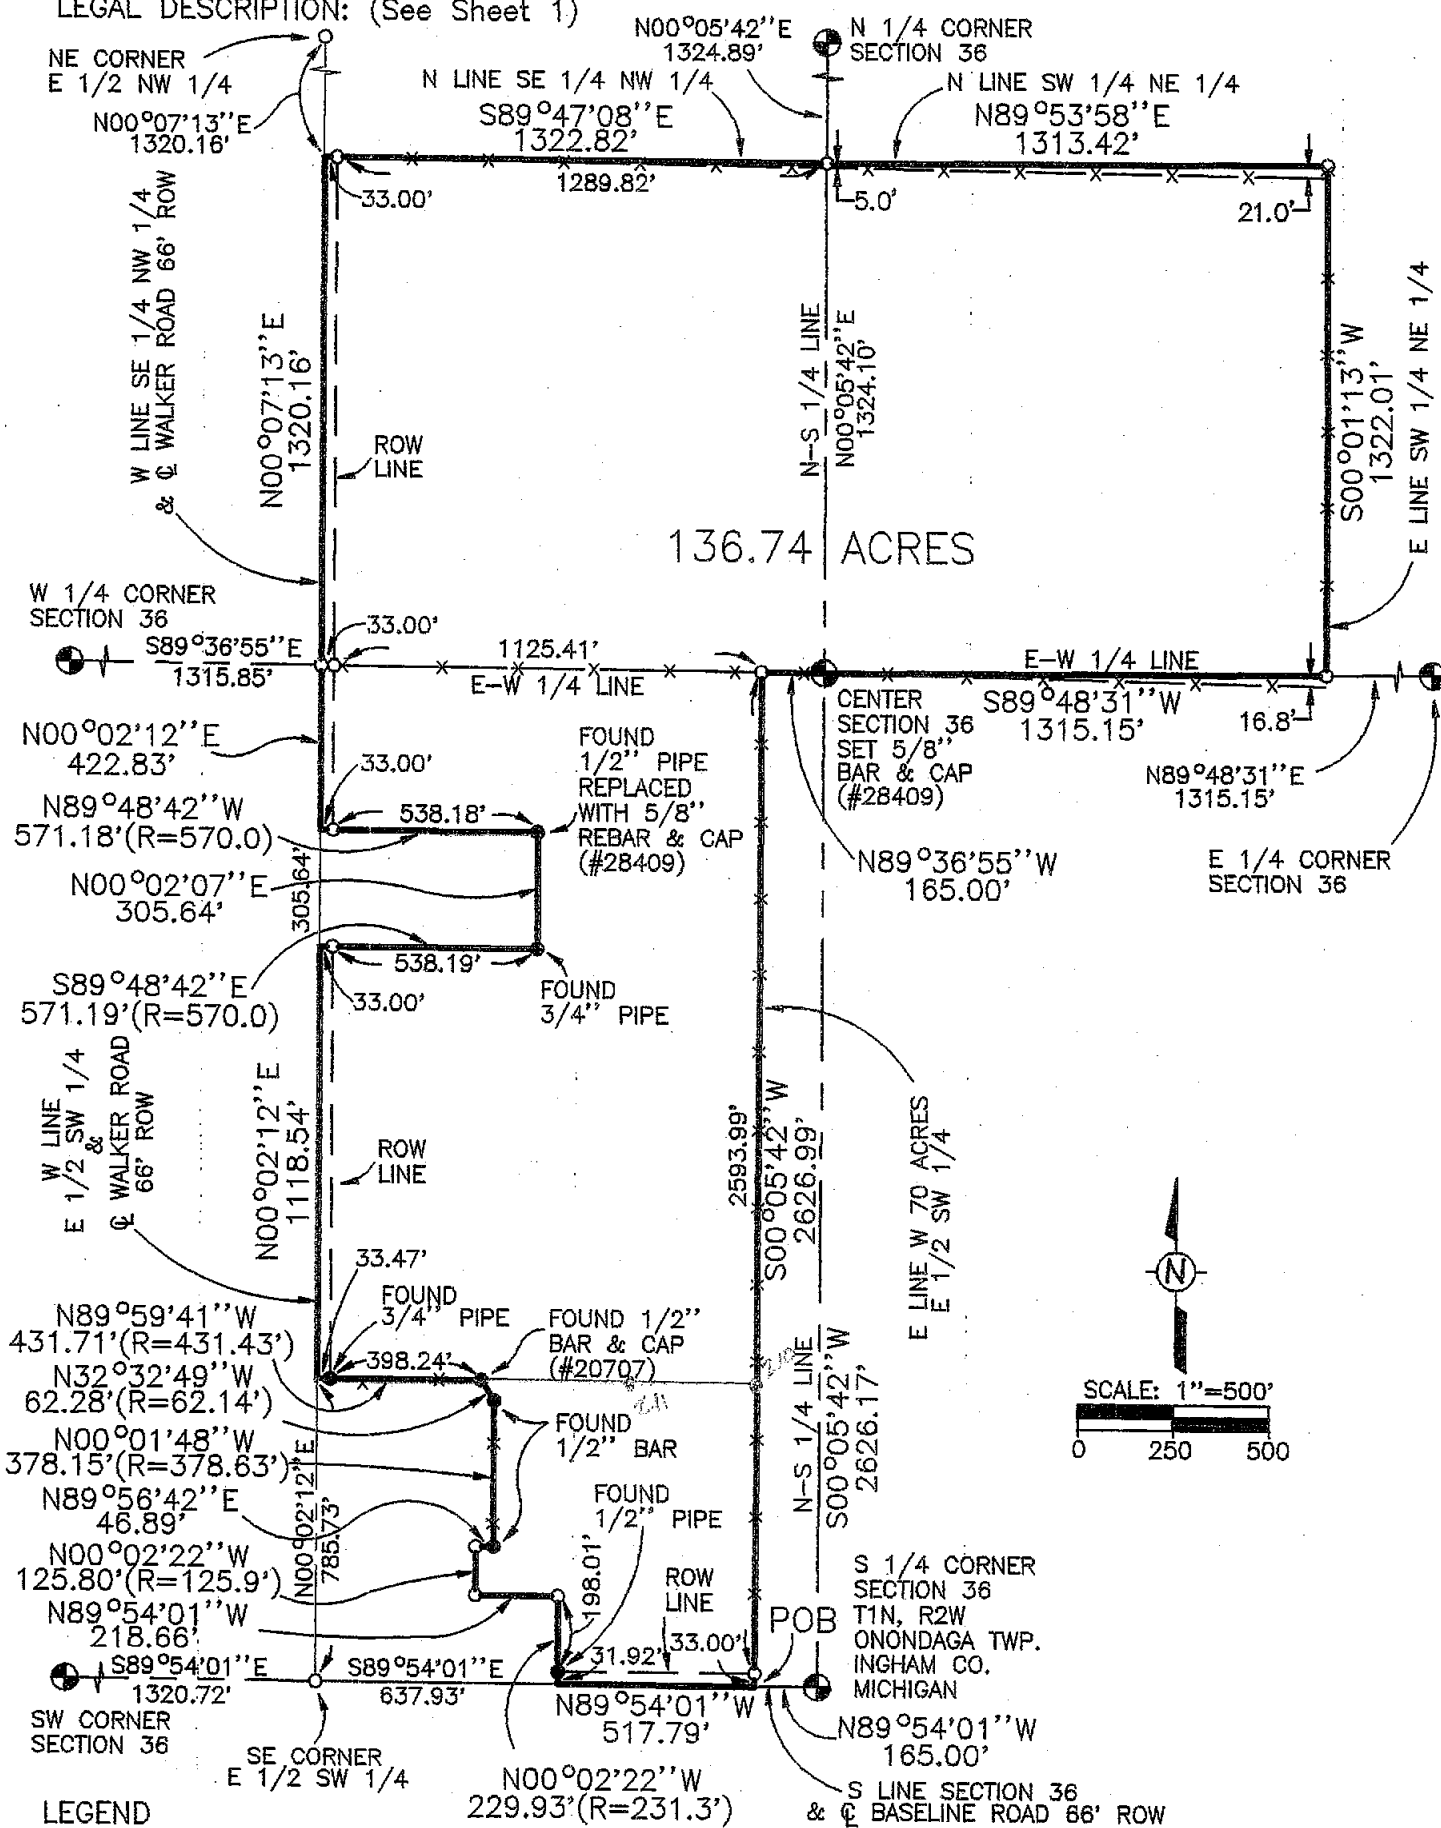

LEGEND

1. Bearings are based on the Michigan coordinate system of 1983, south zone.
2. All dimensions are in feet.
3.  indicates boundary of described parcel.
4.  indicates old fence line.
5.  indicates distance not to scale.
6.  indicates a set 5/8 inch diameter by 24 inch long rebar with cap imprinted "LS 28409", unless otherwise noted.
7. (R=) indicates a bearing or distance as previously recorded.



585 JEWETT ROAD
MASON, MICHIGAN 48854
517-676-6565

NE 1/4, NW 1/4, SW 1/4 Section 36, T1N, R2W
Onondaga Twp., Ingham Co., Michigan

June 25, 1997

Rev. 8/29/97 Correct county name

Job No. 33-579
Sheet 2 of 4

L7 PS16

CERTIFICATE OF SURVEY

For: Barbara Sears
2469 Rives Eaton Road
Jackson, MI 49201

LEGAL DESCRIPTION:

A parcel of land in the East 1/2 of the SW 1/4, the SE 1/4 of the NW 1/4 and the SW 1/4 of the NE 1/4 of Section 36, T1N, R2W, Onondaga Township, Ingham County, Michigan; the surveyed boundary of said parcel being described as commencing at the South 1/4 Corner of Section 36, T1N, R2W, Michigan Meridian; thence N 89°54'01" W, along the South line of the Southwest 1/4 of said section, 165.00 feet to the POINT OF BEGINNING; thence N 89°54'01" W, continuing along said South line, 517.79 feet; thence N 00°02'22" W, 229.93 feet; thence N 89°54'01" W, 218.66 feet; thence N 00°02'22" W, 125.80 feet; thence N 89°56'42" E, 46.89 feet; thence N 00°01'48" W, 378.15 feet; thence N 32°32'49" W, 62.28 feet; thence N 89°59'41" W, 431.71 feet; thence N 00°02'12" E, along the West line of the East 1/2 of the SW 1/4, 1118.54 feet; thence S 89°48'42" E, 571.19 feet; thence N 00°02'07" E, 305.64 feet; thence N 89°48'42" W, 571.18 feet; thence N 00°02'12" E, along the West line of the East 1/2 of the SW 1/4, 422.83 feet to the NW corner of the East 1/2 of the SW 1/4; thence N 00°07'13" E, along the West line of the SE 1/4 of the NW 1/4, 1320.16 feet; thence S 89°47'08" E, along the North line of the SE 1/4 of the NW 1/4, 1322.82 feet; thence N 89°53'58" E, along the North line of the SW 1/4 of the NE 1/4, 1313.42 feet; thence S 00°01'13" W, along the East line of the SW 1/4 of the NE 1/4, 1322.01 feet; thence S 89°48'31" W, along the East-West 1/4 line, 1315.15 feet to the Center of Section; thence N 89°36'55" W, continuing along said East-West 1/4 line, 165.00 feet; thence S 00°05'42" W, along the East line of the West 70 acres of the East 1/2 of the SW 1/4, 2626.99 feet to the point of beginning; said parcel contains 136.74 acres.

For drawing see Sheet 2.



585 JEWETT ROAD
MASON, MICHIGAN 48854
517-676-6565

NW 1/4, SW 1/4 and NE 1/4
Section 36, T1N, R2W
Onondaga Twp., Ingham Co., Michigan

June 25, 1997
Rev. 8/29/97 Correct county name

Job No. 33-579
Sheet 1 of 4

LIBER 7 Pg 516

CERTIFICATE OF SURVEY

For: Barbara Sears
2469 Rives Eaton Road
Jackson, MI 49201

CERTIFICATE OF SURVEY

We hereby certify to the party named hereon, that we have, at her direction surveyed land previously described in a property appraisal and for tax purposes as:


The SW 1/4 of the NE 1/4 of Section 36, T1N, R2W; Also the SE 1/4 of the NW 1/4 of Section 36, T1N, R2W; Also the West 70 Acres of the East 1/2 of SW 1/4 of Section 36, T1N, R2W, Township of Onondaga, Ingham County, MI, EXCEPT the following parcels of land. (1) Beginning at the South 1/4 post of Section 36, thence West 1320 feet, thence N0°02'E, 1904.28 feet, thence N0°02'E, 305.64 feet, thence S89°58'E, 570 feet, thence S0°02'W, 305.64 feet, thence N89°58'W, 570 feet to the POB.

(2) Beginning at the South 1/4 post of Section 36, thence West 682.34 feet to the POB, thence West 376.66 feet, thence North 231.30 feet, thence East 376.66 feet, thence North 357.2 feet, thence East 419 feet, thence South 125.9 feet, thence East 218.66 feet, thence South 231.30 feet to the POB. (3) Beginning at the South 1/4 post of Section 36, thence West 1320.0 feet, thence N0°02'E, 356.0 feet to the POB, thence N0°02'E, 431.00 feet, thence S89°58'E, 431.43 feet, thence S32°32'05"E, 62.14 feet, thence S0°02'W, 378.63 feet, thence N89°58'W, 464.88 feet to the POB.

that we performed the fieldwork for this survey on May 28 and 30 and June 19 and 20, 1997; that we have found or set (on June 19 and 20), as noted hereon, permanent markers at all corners and angle points of the boundaries of these parcels; that we did not use the Monument recorded in Liber 6 page 186 as the North 1/4 corner of Section 36 but instead used a monument that we believe predates said recorded monument; that we used a location for the NW corner of the East 1/2 of the SW 1/4 that we believe was established by A.P. Drake, County Surveyor in a Survey recorded in Volume 3 page 190 County Surveyor records and perpetuated by W.A. Rowe, County Surveyor, in a survey recorded in Volume 5 page 4 County Surveyor records; that we used a location for the Center of Section 36 that we believe was established by A.P. Drake, County Surveyor in above mentioned survey recorded in Volume 3 page 190 County Surveyor records; that we surveyed in said Section 36 to find the perimeter of the NW 1/4, the SW 1/4 and the NE 1/4 and subdivided them in accord with the methods and monumentation that we believe were used by the aforementioned County Surveyors; that we held existing monumentation found on the exceptions listed above as the true boundary of said property; that a concise description of said property is given hereon; This survey complies with the requirements of Act 132 of P.A. 1970.

This survey was performed with a ratio of closure on the unadjusted field observations of 1 in 5000.

Ronald L. Enger 6-25-97
Ronald L. Enger, LLS No. 28409



585 JEWETT ROAD
MASON, MICHIGAN 48854
517-676-6565

NW 1/4, SW 1/4 and NE 1/4
Section 36, T1N, R2W
Onondaga Twp., Ingham Co., Michigan

June 25, 1997

Job No.33-579
Sheet 3 of 4

CERTIFICATE OF SURVEY

For: Barbara Sears
2469 Rives Eaton Road
Jackson, MI 49201

CORNERS OF THE UNITED STATES PUBLIC LAND SURVEY
Section 36, T1N, R2W, Onondaga Township, Ingham County, Michigan

K-11 NW Corner Recorded Liber 8 of Corners Page 417
3/4" Diameter x 24" Long Smooth Steel Bar and Cap Imprinted "PA 345 PS 28409"
in Monument Box

Nail & Tag 18998 in North side 10" Oak, 116° Az., 74.09'
Bottom of Steel Anchor Post, 183° Az., 28.55'
Nail & Tag 25832 in South side 24" Maple, 294° Az., 77.89'
Nail & Tag 28414 in SW side 28" Maple, 322° Az., 34.45'

L-11 North 1/4 Corner

3/4" Pipe & Cap #25837 over Buggy Axle
Nail & Tag #28414 in North side 14" Maple, 260° Az., 76.70'
Nail & Tag #25837 in West side 10" Cherry, 148° Az., 36.93'
Nail & Tag #25837 in North side 8" Cherry, 235° Az., 33.39'
Nail & Tag #25837 in North side 8" Cherry, 250° Az., 54.96'

K-12 West 1/4 Corner Recorded Liber 7 of Corners Page 42

1" Pipe and yellow plastic cap Lester LS 18998
Nail and Tag 18998 SE side 24" oak, 48° Az, 13.4'
Nail and Tag 18998 East side 15" Maple, 331° Az, 16.2'
Nail and Tag 18998 South side 14" oak 297° Az, 24.7'
Nail and Tag 18998 East root 36" Hickory, 210° Az, 4.3'
Nail and Tag 18998 West side 10" Hickory, 41° Az, 5.5'

L-12 Center of Section

5/8" DIAMETER X 24" REBAR AND CAP IMPRINTED "PS 28409"
Nail & Tag PS 25837 West Side 18" Ash, 70° AZ., 6.87'
Nail & Tag PS 25837 East Side 4" Oak, 215° AZ., 18.88'
Nail & Tag PS 25837 South Side 29" Oak, 290° AZ., 13.92'
Nail & Tag PS 25837 East Side 4" Oak, 350° AZ., 7.10'

M-12 East 1/4 Corner

3/4" X 24" Pipe & Cap #25837 at old fence corner
Nail & Tag 25837 E. Side 6" Hick., Naz 335°, 13.25'
Nail & Tag 25837 N. Side 10" Hick., Naz 225°, 16.20'
Nail & Tag 25837 E. Side 27" Ash, Naz 180°, 5.70'
Angle Iron Corner Post, Naz 005°, 3.25'
Nail & Tag 25837 W. Side 12" Oak, Naz 140°, 15.45'

K-13 SW Corner Recorded Liber 6 Page 144

Concrete Monument With 1/2" Steel Bar
Nail & Tag 25837 N. Side 36" Oak, Naz 110°, 93.25'
Nail & Tag 18998 N. Side 14" Hick., Naz 165°, 29.30'
4" Concrete Monument (K-1 T1S, R2W), Naz 275°, 54.72'
4" Concrete Monument (Property Controlling Corner), Naz 95°, 49.53'

K-12 South 1/4 Corner Recorded Liber 6 of Corners Page 98

Concrete Monument With 1/2" Bar
Nail and Shiner in North side Power Pole, 289° Az, 181.54'
Nail and White Tag North side Corner Fence post, 262° Az, 165.66'
Nail and Shiner in North side 24" Walnut, 263° Az, 171.15'
Nail and Tag 25837 North side 24" Oak, 100° Az, 159.50'

NW Corner East 1/2 SW 1/4

5/8" Bar & Cap 28409
Nail and Tag #25837 NW side 5" Hickory, 48° Az, 32.40'
Nail and Tag #28409 South side 29" Hickory, 102° Az, 33.75'
Nail and Tag #25837 East side 25" Hickory, 206° Az, 51.30'
Nail and Tag #25837 South side 38" Oak, 315° Az, 21.29'



585 JEWETT ROAD
MASON, MICHIGAN 48854
517-676-6565

NW 1/4, SW 1/4 and NE 1/4
Section 36, T1N, R2W
Onondaga Twp., Ingham Co., Michigan

June 25, 1997

Job No.33-579
Sheet 4 of 4

