

F 1-1 Found point of old stake and remains of both witnesses.

W. Oak 12 S. 1 1/4 W 32

Elm 30 S. 8 1/4 E 215 Nov. 20/85

F 1-1 Measured distance ^{from} F to Onondaga 1/4 post East and found it 40.75 instead 40.84 being 9 lks short. Set f at 40.33 which agrees with old fence running South 27.72

Hick 5 S 1/2 E 50 1/4

Maple 24 S 60 1/2 W 102 Nov 20/85

G M-1 Found corner set by H. F. Bean River which is the same for Tompkins; witness for Tompkins Elm 15 S 5 1/2 E 519

W. Oak 12 S 86 1/4 W 501 Nov 20/85

g M-2 Found corner by H. F. Bean and remains of 2nd original witness

Sup Oak 7 N 11 E 111 1/4 73.4

W. 20 24 S 19 E 113 Nov 20/85

H M-3 Found post at corner and both witness stumps standing;

Bk Walnut 14 S 75 W 390

D 12 N 66 W 284 1/2 Nov. 20/85

h M-4 Found 2 stakes together above ground and old one below ground and 2nd witness stump standing

Y. Oak 13 S. 10 E 57 1/4

W. D 10 S 78 1/4 E 55 1/4 Oct 22/85

I M-5 Corner and witnesses gone. Measured a right line from i to h 80.90. and found that half distance 40.45 made correct jog of 47 lks with River Corner as per original field notes - set post there Br Oak 12 S 3 1/2 E 187 1/4

Oct 22/85

Y. Oak 12 N 41 1/4 E 50 1/2

i M-6 Found stone at corner set by H. F. Bean, witnesses gone

Y. l 18 S 82 1/2 E 66 1/4

W. Oak 18 S. 84 W 145 3/4 Oct 21/85

K M-7 Found stone at corner and both original witnesses standing

new witnesses Sup Oak 8 N 38 1/2 W 65 1/4

D 10 S 18 W 58 Oct 21/85

l M-8 Found old stake hole witnesses gone

Y. Oak 18 S. 86 W 17 3/4


D 12 N 1/2 W 87 Oct 20/85

Holcroft 1885

COUNTY SURVEYOR'S RECORD,

TOWN One NORTH, RANGE Two West, MERIDIAN OF MICHIGAN.

Section 35

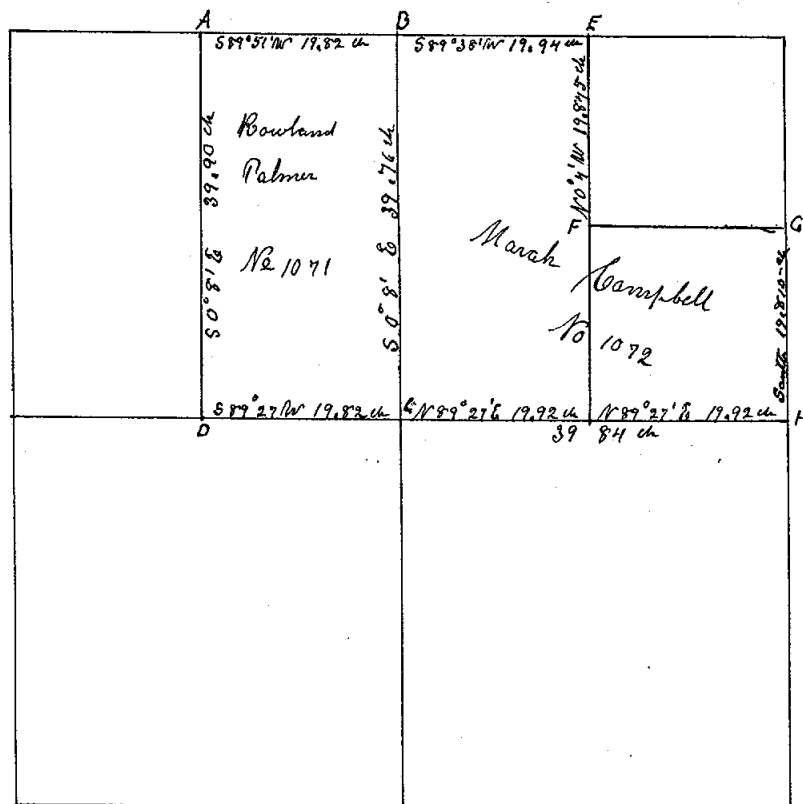

P. 346 Vol 2

TOWN One NORTH, RANGE Two West, MERIDIAN OF MICHIGAN.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19

24

25

A Hick 12 S 65 1/4 E 34 3/4 ch BOck 24 N 38 E 62 7/8
 B W Oak 23 S 35 E 24. DO 11 N 7 E 45
 C Elm 22 N 83 W 119 No other tree
 D W Oak 10 S 57 E 34 DO 5 S 48 3/4 W 13 1/2
 E R Oak 24 S 55 E 65. W Oak 24 S 12 1/2 E 92 1/2
 F Elm 22 S 53 1/2 W 70 1/2 Maple 12 S 5 1/2 W 45
 G No Bearing tree
 H W Oak 18 S 5 1/2 E 48 DO 18 N 82 1/2 E 45

OCT. 1858
 T. Brown

Vol 2 pg 346
 (Vol 3 pg 167)


SOURCE: REC. CO. SURVEYOR Vol. 5 p. 4

TRANSCRIBED from ORIGINAL on file at REMON. OFFICE
~~REMOVAL OFFICE~~

SURVEYOR'S NAME W. A. ROWE SURVEYOR NO.

DATE OF SURVEY Nov. 15 & 16, 1899 SECTION NO. 35 & 36

MAGNETIC VARIATION

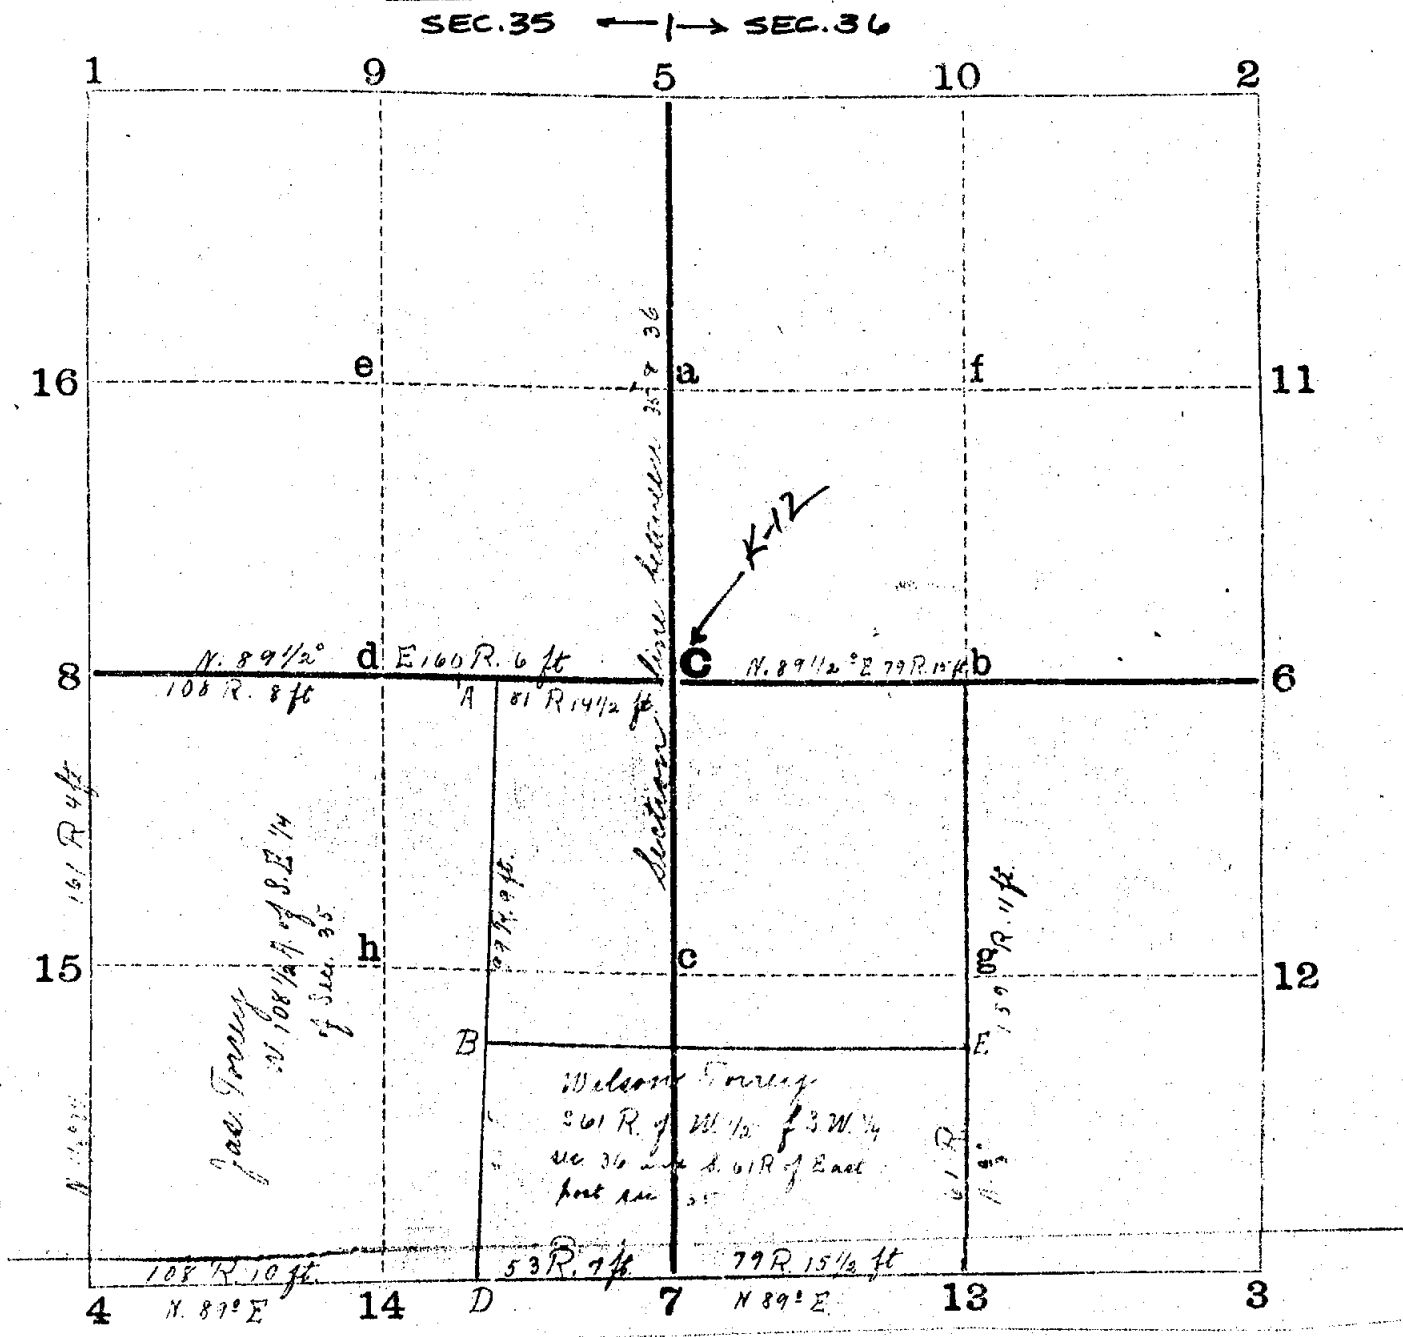

WITNESSES ON NEXT PAGE

Nov 5 pg 4



ONONDAGA
TOWNSHIP

T / N, R 2 ~~SW~~

K-12
CORNER CODE

ATTACHMENT NO.

P. 1 of 2

SOURCE:

RECORD OF THE COUNTY SURVEYOR VOL. 5 p. 4

TRANSCRIBED from ORIGINAL

DUPLICATE

on file at

REMON. OFFICE

K-12-00

C 1/4 post Sec. 35 Old post found & Stamp of old witness Oak post & crockery set. for 14 to 5 S 58° W 4 3/4 ft. R. Oak 14 N 51 1/2° E 15 1/4 ft.

1

3 S 1/4 post Sec. 36 set 3 R 3 ft. east from Jackson county post. Gas pipe & crock. for W. Oak 6 S. 57 1/2° E 29 3/4 ft. W. Oak 6 S. 20° E 16 ft.

4 S 1/4 post Sec. 35 long blue stone set from old witnesses for B. Oak 8 N 7° W 16 ft. W. Oak 6 N 29 1/4° W 44 ft.

7 S E cor. Sec. 35 set 6 R. 6 ft. east from Jackson Co. corner. 11 ft. at foot. Oak 3 N. 59° E 38 1/2 ft. Swamp Oak 6 S 32 1/4° E 53 1/4 ft.

8 Hunter sec. 35. Old post found. Gas pipe and tile set nearly in line of wire fence North and East. for W. willow 16 S. 11 1/4° E 39 3/4 ft.

Oak post and crockery set on line and 1/2 way between 3 and 7 for W. Oak 31° W. 45 ft. App. 2 S 34 1/2° W 60 ft. and thick 6 N 13° W 33 1/2 ft.

2

Old post & stone found for Oak 10 S. 27° E 57 3/4 ft. Oak 6 S 40° W. 37 1/4 ft. thick


F. Stone set with crockery

B 1/2 Buggy wheel set with crockery

D 1/2 Buggy wheel set

E Post near cross fence top 10 ft. on line 1 R. wood of line corner for W. Oak 42 ft. and thick 7 N 30° W 50 ft.

TRANSCRIBED from ~~REDACTED~~ on file at REMON. OFFICE

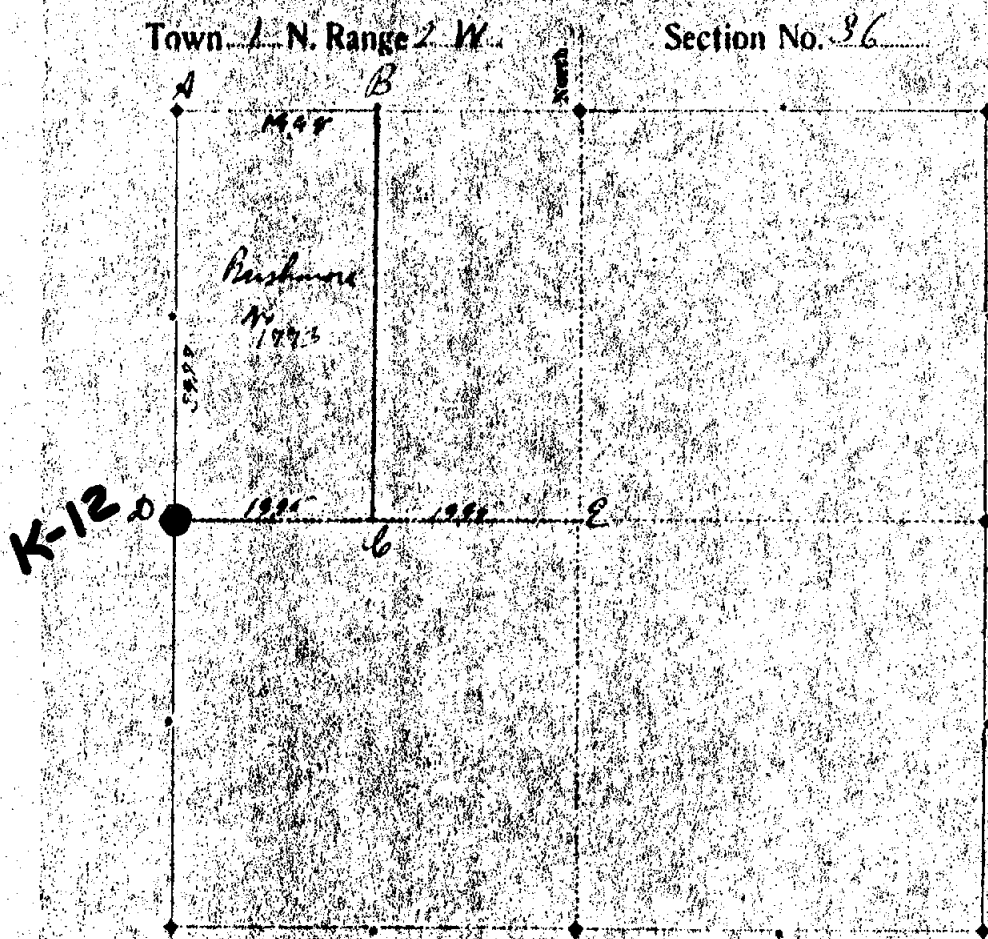

Section	Timber	Diam	Bearing	Links	Section	Timber	Diam	Bearing	Links
A	Stake with ul sample	9	N 74 W	47 1/2					
		9	S 5 W	22 1/2					
B	Stone ridge corner								
C	Stick	10	N 77 1/2 W	50 1/2					
D	Post W. Oak	19	N 82 1/2 W	63					
E	Wood stake								

Run by the true meridian. Magnetic variation 1 degrees 22 minutes W

Surveyed the 29 day of April 1897 by

County Surveyor of Ingham County, Michigan

Sec. 36

ONONDAGA
township


T 1 N, R 2 W

K-12 8
corner code attachment no.

p. 1 of 1

SOURCE: FOLDER #1

P. 56

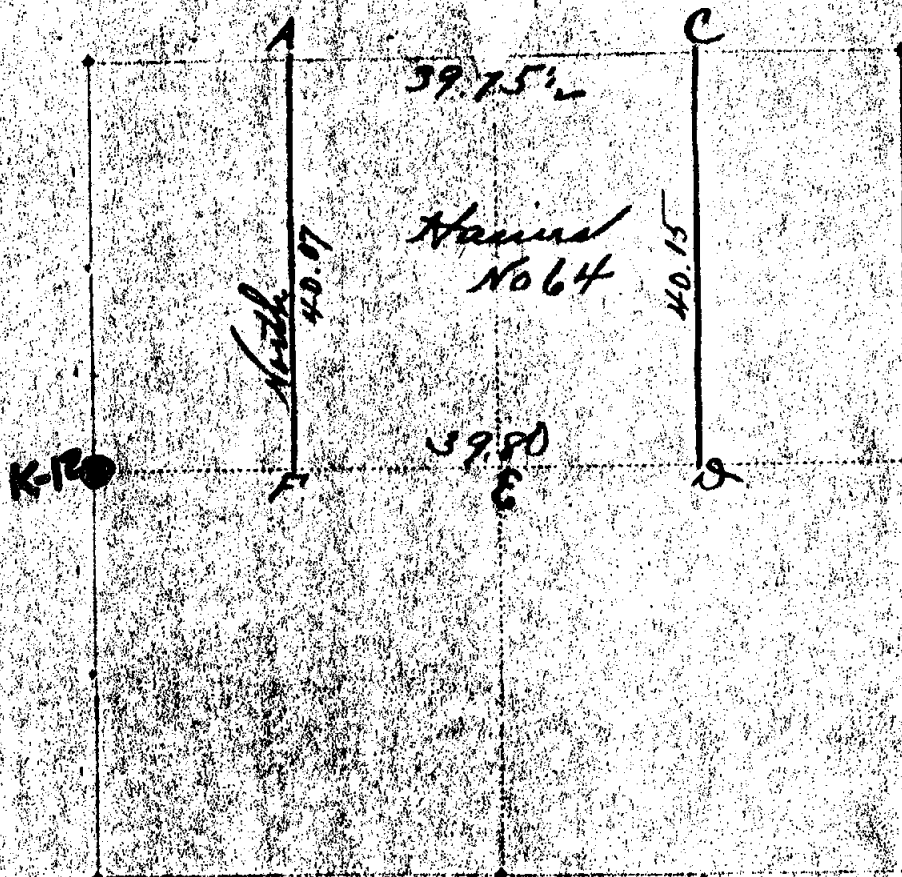TRANSCRIBED from DUPLICATE on file at REMON. OFFICETown 1 N, Range 2 W.Section No. 36

Section	Timber	Diam	Bearing	Links	Section	Timber	Diam	Bearing	Links
A	W. Oak	20	W 1/4	17					
	Do	12	S 77 E	9					
B	W. Oak	8	N 78 E	36					
	W. Oak	9	S 41 E	33					
D	Elm	1	S 78 W	18					
	W. Oak	10	S 9 W	11 1/2					
E	W. Oak	14	N 39 E	41					
	Do	15	S 40 W	39 1/2					
F	Do	12	N 22 E	36					
	Do	18	N 16 E	62 1/2					

Run by the true meridian. Magnetic variation 3 degrees 20 minutes 6Surveyed the 17 day of Aug 1889 byA. Jackson

County Surveyor of Ingham County, Michigan.

Sec. 36

ONONDAGA
townshipT 1 N, R 2 WK-12
corner code attachment no.p. 1 of 1

Vol 1 pg 17


56

SOURCE: RECORD OF COUNTY SURVEYOR Vol. 3 p. 190
TRANSCRIBED from ~~ORIGINAL~~ on file at REMON. OFFICE
DUPLICATE
SURVEYOR'S NAME A. P. DRAKE SURVEYOR NO. _____
DATE OF SURVEY ~~DEC. 7, 1882~~ SECTION NO. 36
AUG. 29, 1882
MAGNETIC VARIATION 10 20 W

190

T. 1 N. R. 2 W.

SECTION 36

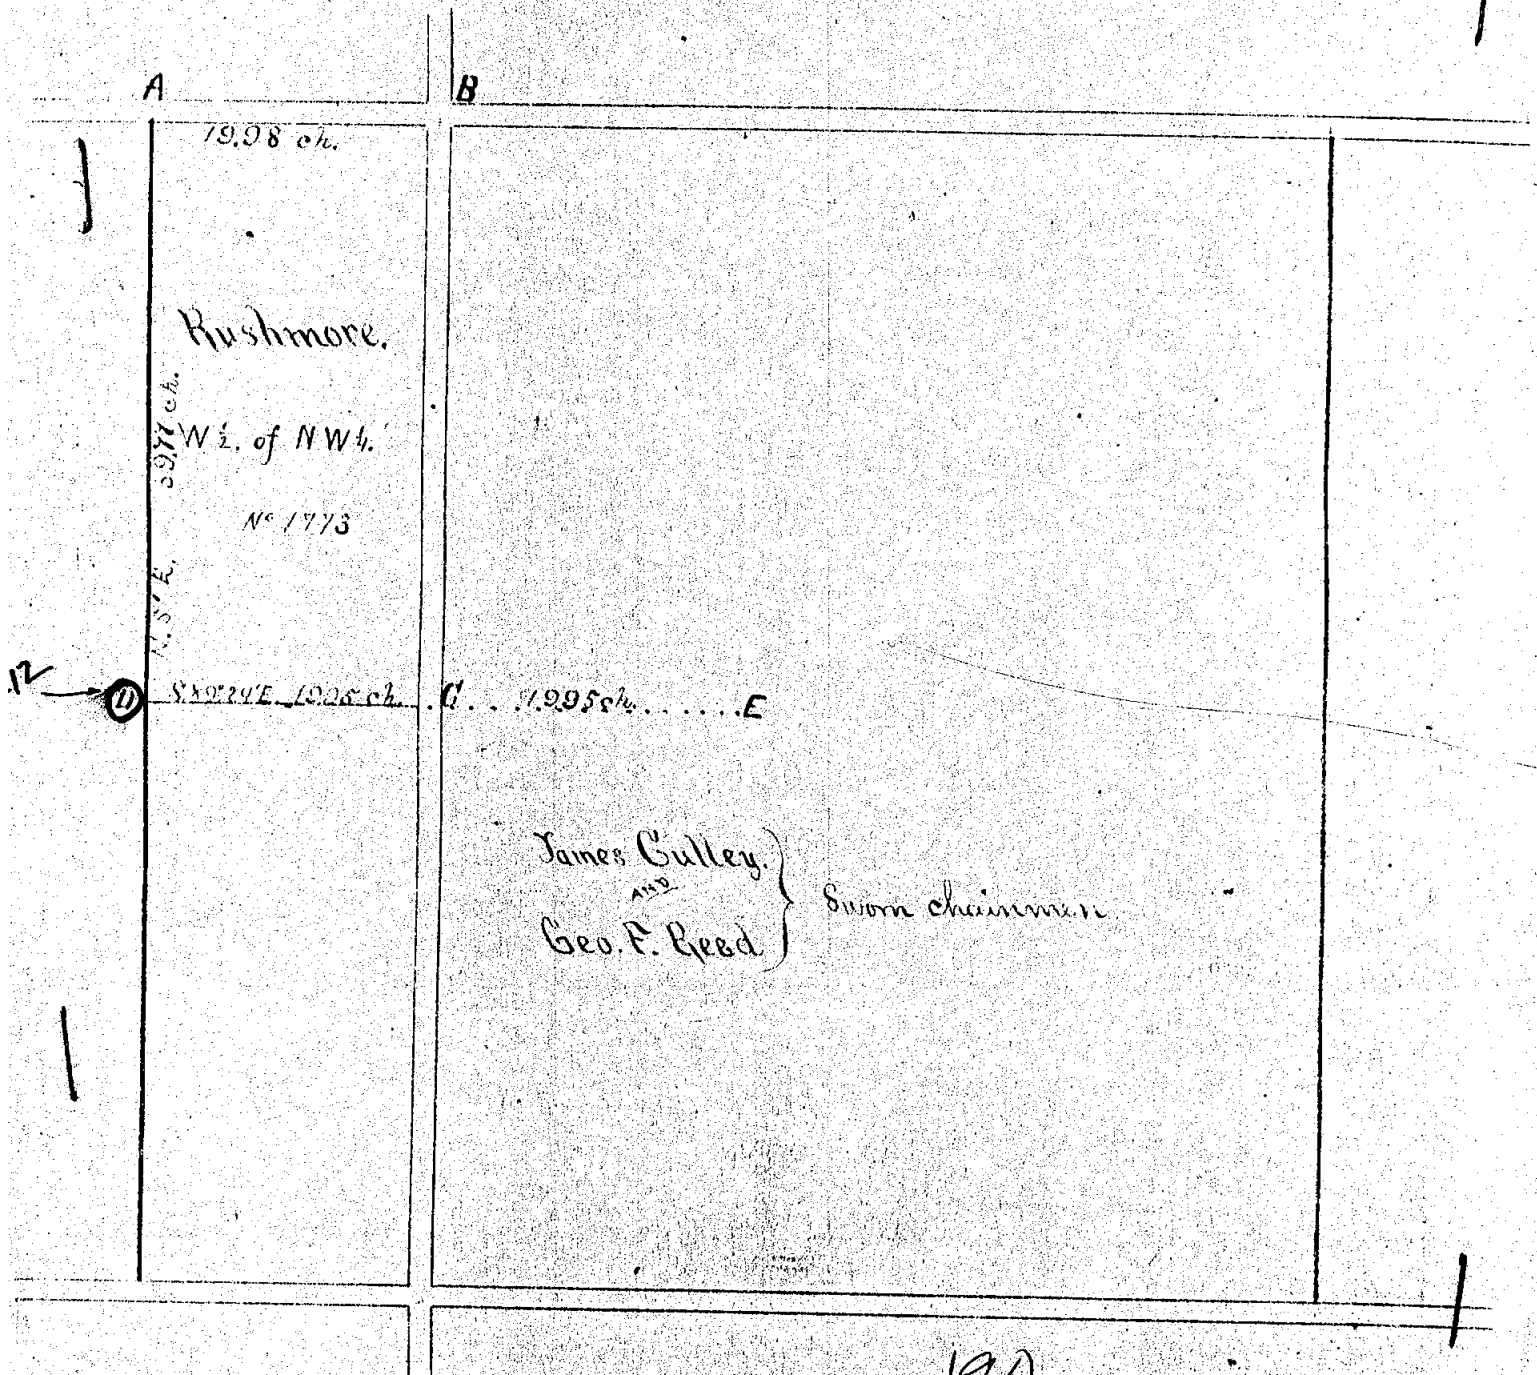

Vol 3 pg 190

ONONDAGA
TOWNSHIP

T 1 N, R 2 W

K-12
CORNER CODE

2
ATTACHMENT NO.

P. 1 of 2

SOURCE:

Record of County Surveyor Vol. 3 p. 190
 TRANSCRIBED from ~~ORIGINAL~~ on file at REMON. Office
 DUPLICATE

190

Survey of the North-west quarter of Section No. Thirty six, Township No. One North of Range No. Ten West as shown by the plat.

The corners B, C & E. were once located by H. Jackson in the year 1839 and recorded in Liber 1 Page 17, and were found except C. which was located equidistant between A & E. The corner A was also extinct and was re-established at the intersection of the Section lines East & West and North & South. The corners are perpetuated and described, viz

A = Stake & pile for a Maple 4 in. dia. bears	S. 74° W.	4 1/2 l.
" " " " " " " " " " " "	S. 5° W.	22 1/2 l.
B = Stone &c set for the corner		
C = " " Hick 10 " " " " " "	S. 77 3/4° E.	50 1/2 l.
* D = Post " " W.O. 18 " " " " " "	N. 83 1/2° E.	63 l.
E. obsolete but a good stake was driven to perpetuate it		


Run by the County Meridian Line altered 1° 00' E.
 Surveyed August 29th 1882

Recorded Dec. 7th 1882

By A. T. Drake
 Co. Surveyor

Vol 3 pg 190

TRANSCRIBED from ~~REDACTED~~ on file at REMON. OFFICE

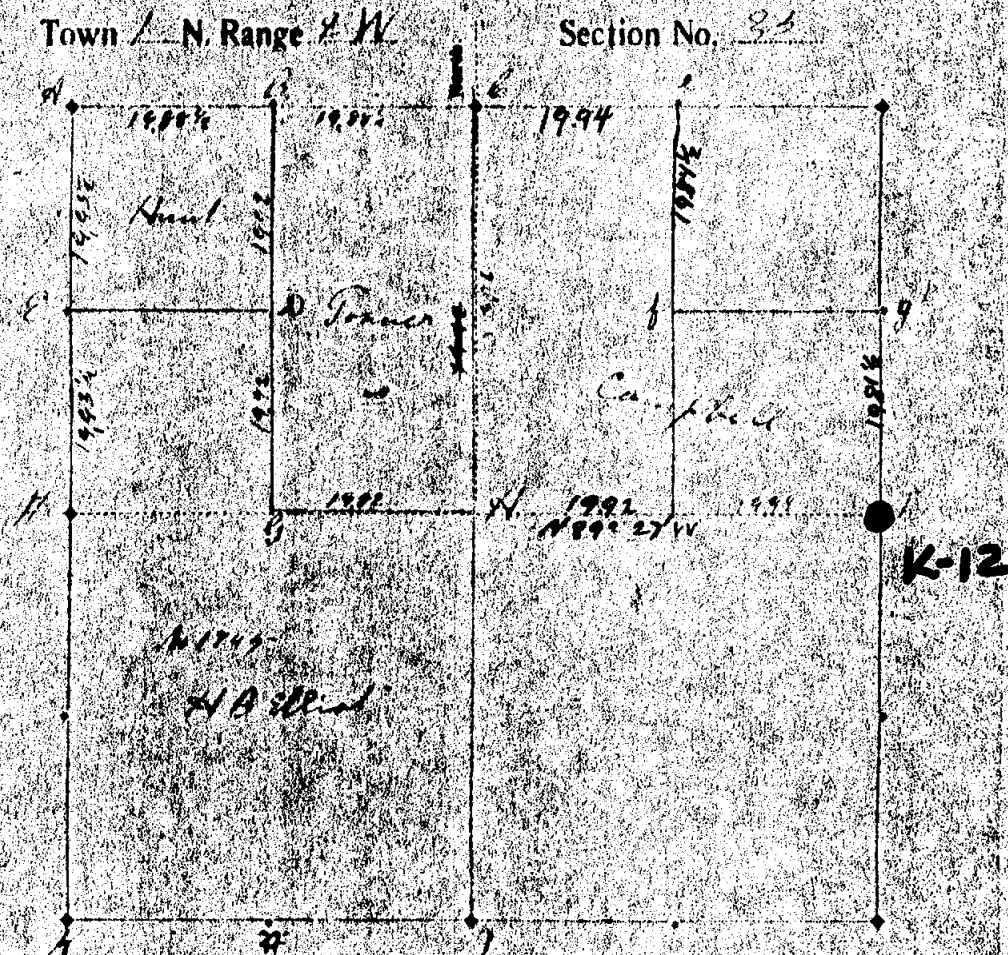

Section	Timber	Diam	Bearing	Links	Section	Timber	Diam	Bearing	Links
A	Stone	15	42° 16' E	113 1/2	1	Stone	10	85° 15' E	53 1/2
	Wick	9	76° 15' N	58 1/2		Wick	8	86° 15' W	42
B	Stone	6	43° 15' E	64 1/2	2	Wick	24	166° 45' E	164
	Wick	4	11° 15' N	50 1/2		Wick	12	138° 50' E	63
C	Stone	10	47° 15' E	64 1/2	3	Wick	22	85° 35' W	90 1/2
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
D	Stone	10	47° 15' E	64 1/2	4	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
E	Stone	10	47° 15' E	64 1/2	5	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
F	Stone	10	47° 15' E	64 1/2	6	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
G	Stone	10	47° 15' E	64 1/2	7	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
H	Stone	10	47° 15' E	64 1/2	8	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
I	Stone	10	47° 15' E	64 1/2	9	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
J	Stone	10	47° 15' E	64 1/2	10	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
K	Stone	10	47° 15' E	64 1/2	11	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
L	Stone	10	47° 15' E	64 1/2	12	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
M	Stone	10	47° 15' E	64 1/2	13	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
N	Stone	10	47° 15' E	64 1/2	14	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
O	Stone	10	47° 15' E	64 1/2	15	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
P	Stone	10	47° 15' E	64 1/2	16	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
Q	Stone	10	47° 15' E	64 1/2	17	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
R	Stone	10	47° 15' E	64 1/2	18	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
S	Stone	10	47° 15' E	64 1/2	19	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
T	Stone	10	47° 15' E	64 1/2	20	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
U	Stone	10	47° 15' E	64 1/2	21	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
V	Stone	10	47° 15' E	64 1/2	22	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
W	Stone	10	47° 15' E	64 1/2	23	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
X	Stone	10	47° 15' E	64 1/2	24	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
Y	Stone	10	47° 15' E	64 1/2	25	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91
Z	Stone	10	47° 15' E	64 1/2	26	Wick	18	87° 15' W	91
	Wick	6	11° 15' N	50 1/2		Wick	18	87° 15' W	91

Run by the true meridian. Magnetic variation 1 degree 20 minutes W.

Surveyed the 22nd day of July 1851 by

A. A. Broke
County Surveyor of Ingham County, Michigan.


Sec. 3.5

53

COUNTY SURVEYOR'S RECORD,

TOWN One NORTH, RANGE Two West, MERIDIAN OF MICHIGAN.

SEC. 25

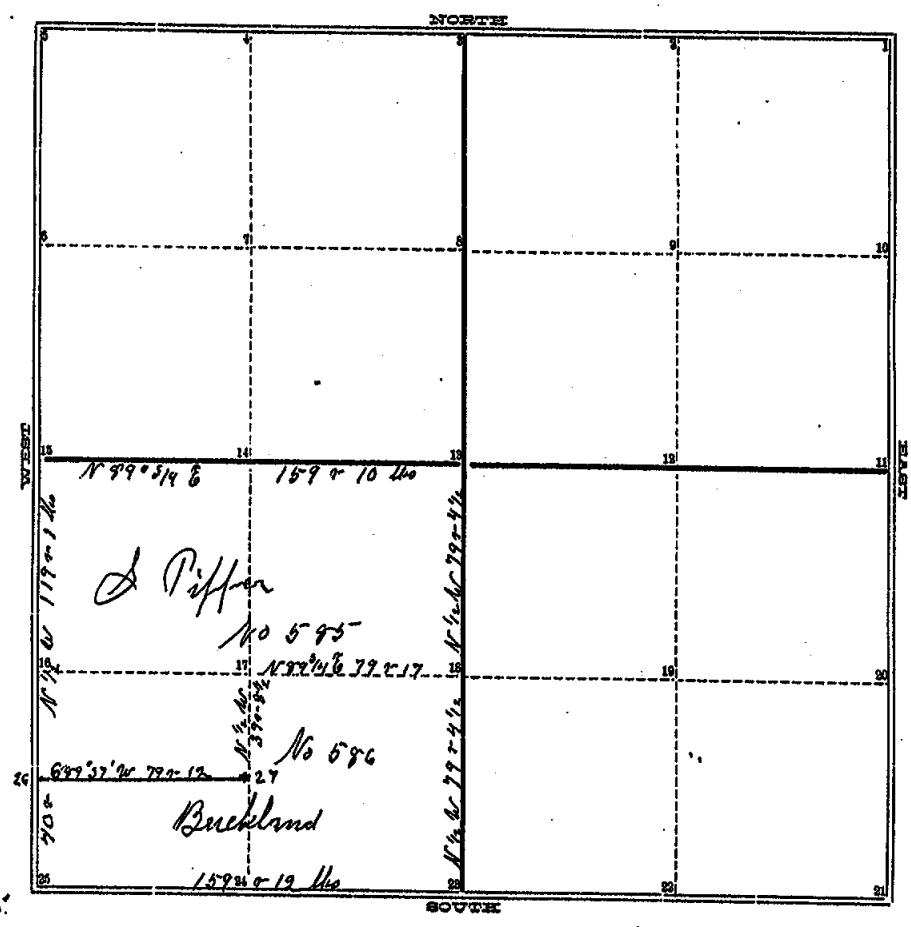

P 1240 d 2

TOWN One NORTH, RANGE Two West, MERIDIAN OF MICHIGAN.


- 1
 - 2
 - 3
 - 4
 - 5
 - 6
 - 7
 - 8
 - 9
 - 10
 - 11
 - 12
 - 13
 - 14
 - 15
 - 16
 - 17
 - 18
 - 19
 - 20
 - 21
 - 22
 - 23
 - 24
 - 25
- Blm 15 N 1 W 12
D O 9 S 12 W 26
W Oak 24 S 6 E 47
D O 13 N 54 W 8 70 1/4
W Oak 14 S 67 3/4 W 93
D O 18 N 65 E 45 1/2
- Blm 16 N 27 1/2 E 34
Blm 16 S 46 1/2 W 31 1/2
- Blm 18 North 5
Maple 10 S 60 E 22
- W Oak 28 S 21 1/2 W 25 1/4
D O 2 S 89 1/2 E 36
W Oak 22 N 27 1/2 E 61
- Blm 14 N 51 1/2 W 38 1/2
- Poplar 6 S 60 W 30
B Oak 8 N 50 1/2 E 17

Nov 16, 1852
A. Jackson

COUNTY SURVEYOR'S RECORD,

TOWN One NORTH, RANGE Three West, MERIDIAN OF MICHIGAN.

SEC. Twenty-Five

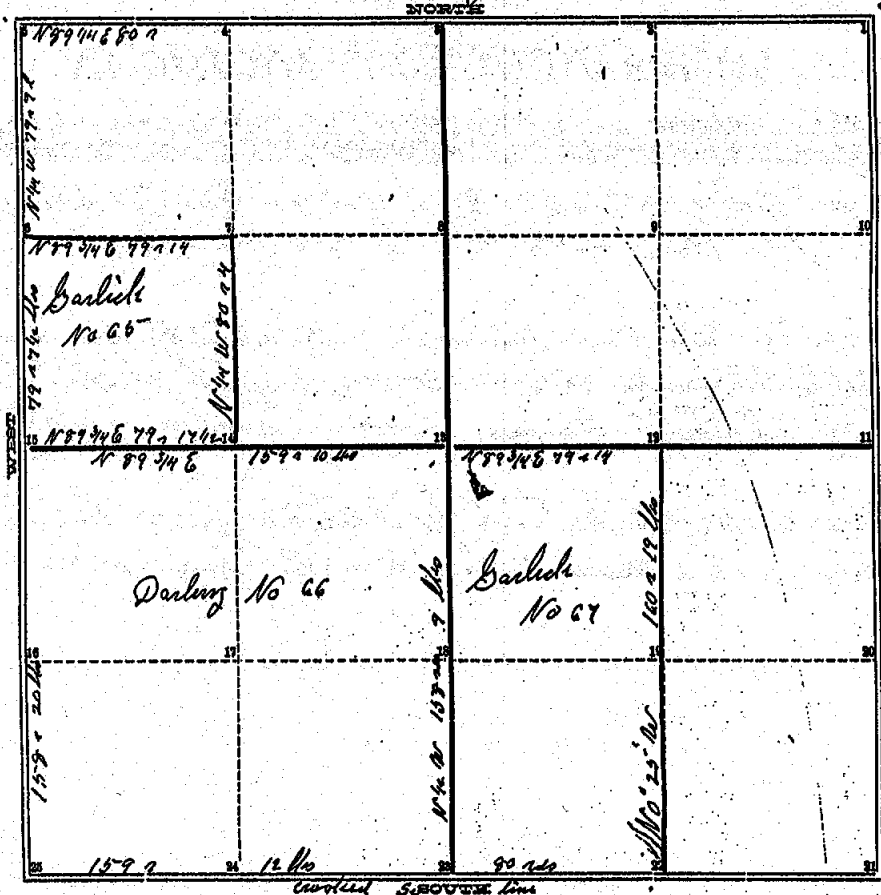

Page 18 of 1

TOWN One NORTH, RANGE Three West, MERIDIAN OF MICHIGAN.

1

24

Ebm 16 N 1 W 12
25 Ebm 9 S 12 W 26 1/2

2

3

4 SW cor of School House N 41° 1/2 E 179 1/2 lks

5 B. Schum 5 S 7 1/2 W 193 lks
Swampy Oak 18 N 28° 6' 59 lks

6 W Oak 16 N 86° 6' 40

W Oak 24 S 79° W 15-

7 W Oak 18 S 89° 6' 17

8

9

10

11 W Oak 20 S 45° E 130 lks

12 W Oak 24 S 37° W 15 lks

13 Ebm 16 S 46° 1/2 W 26 1/2 lks

W Oak 12 S 21° 1/2 W 24 1/2 lks

14 W Oak 14 S 8 1/2 E 40

Ebm 18 North 5 lks

15 Maple 10 S 69° E 22

16

17

18

19

20

21

W Oak 8 N 78° 1/2 E 36 lks

W Oak 9 S 51° E 35 lks

Poplar 6 S 60° W 30 lks

22 W Oak 4 N 50° 1/2 E 17

See Back

INGHAM COUNTY, MICHIGAN.

19

TOWN *One* NORTH, RANGE *Three West*, MERIDIAN OF MICHIGAN.

Surveyed and recorded Oct 14th 1889 by A Jackson County Surveyor for
the County of Ingham Var 3° 20' E

This section corner 23+24+25+26 I located from the authority and at the best of my
ability Without Prejudice To any one April 25th 1888 Magnetic Variation 2° 44' E
W H Baynor County Surveyor

At No 1 the N E corner of the section I found the original corner and set stone
from which an Elm 24 inch Bears N. 36° 14' W 43 the June 3rd 1878 A P Decker Co Surveyor


SOURCE: FOLDER #1

P. 54

TRANSCRIBED from ~~CONFIDENTIAL~~ DUPLICATE on file at REMON. OFFICE

Town 1 N, Range 24

Sections No. 35 + 36

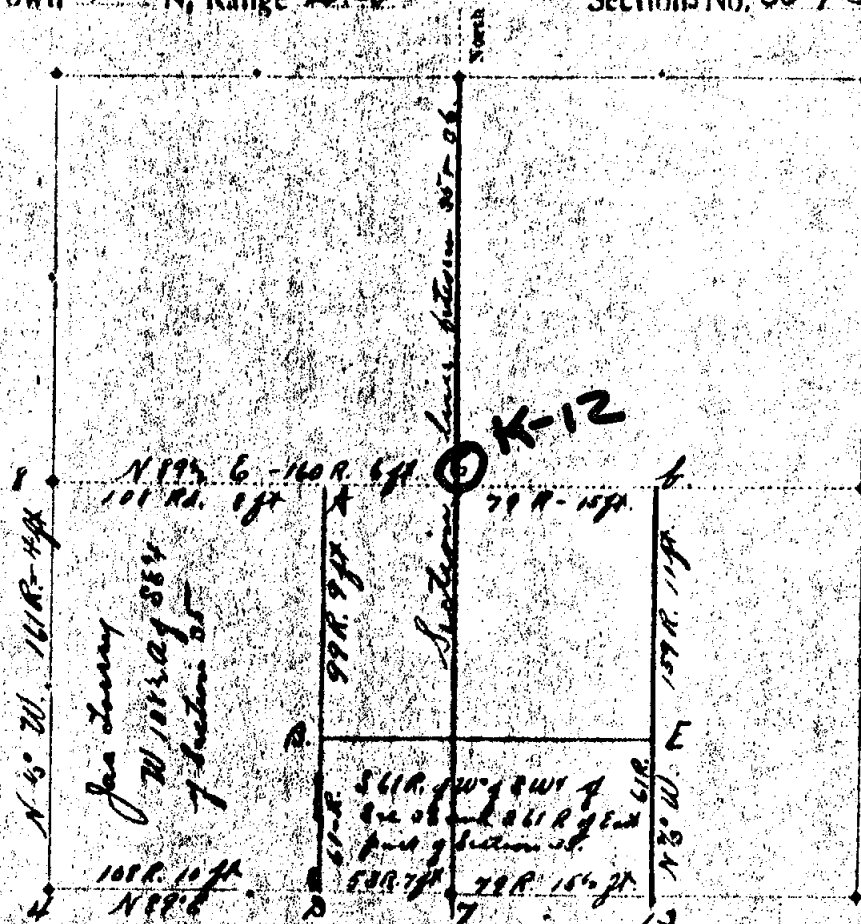

Section	Timber	Diam	Height	Weight	Section	Timber	Diam	Height	Weight
6	Red Oak	5	5.56 W	15.5	8	Stone with cracking			
3	W. Oak	6	5.57 W	20.5	9	R. & R. with cracking			
4	W. Oak	6	5.58 W	20.5	10	R. & R. with cracking			
5	W. Oak	6	5.59 W	20.5	11	R. & R. with cracking			
7	W. Oak	6	5.60 W	20.5	12	R. & R. with cracking			
8	W. Oak	6	5.61 W	20.5	13	R. & R. with cracking			
9	W. Oak	6	5.62 W	20.5	14	R. & R. with cracking			
10	W. Oak	6	5.63 W	20.5	15	R. & R. with cracking			
11	W. Oak	6	5.64 W	20.5	16	R. & R. with cracking			
12	W. Oak	6	5.65 W	20.5	17	R. & R. with cracking			
13	W. Oak	6	5.66 W	20.5	18	R. & R. with cracking			
14	W. Oak	6	5.67 W	20.5	19	R. & R. with cracking			
15	W. Oak	6	5.68 W	20.5	20	R. & R. with cracking			
16	W. Oak	6	5.69 W	20.5	21	R. & R. with cracking			
17	W. Oak	6	5.70 W	20.5	22	R. & R. with cracking			
18	W. Oak	6	5.71 W	20.5	23	R. & R. with cracking			
19	W. Oak	6	5.72 W	20.5	24	R. & R. with cracking			
20	W. Oak	6	5.73 W	20.5	25	R. & R. with cracking			
21	W. Oak	6	5.74 W	20.5	26	R. & R. with cracking			
22	W. Oak	6	5.75 W	20.5	27	R. & R. with cracking			
23	W. Oak	6	5.76 W	20.5	28	R. & R. with cracking			
24	W. Oak	6	5.77 W	20.5	29	R. & R. with cracking			
25	W. Oak	6	5.78 W	20.5	30	R. & R. with cracking			
26	W. Oak	6	5.79 W	20.5	31	R. & R. with cracking			
27	W. Oak	6	5.80 W	20.5	32	R. & R. with cracking			
28	W. Oak	6	5.81 W	20.5	33	R. & R. with cracking			
29	W. Oak	6	5.82 W	20.5	34	R. & R. with cracking			
30	W. Oak	6	5.83 W	20.5	35	R. & R. with cracking			
31	W. Oak	6	5.84 W	20.5	36	R. & R. with cracking			
32	W. Oak	6	5.85 W	20.5	37	R. & R. with cracking			
33	W. Oak	6	5.86 W	20.5	38	R. & R. with cracking			
34	W. Oak	6	5.87 W	20.5	39	R. & R. with cracking			
35	W. Oak	6	5.88 W	20.5	40	R. & R. with cracking			
36	W. Oak	6	5.89 W	20.5	41	R. & R. with cracking			
37	W. Oak	6	5.90 W	20.5	42	R. & R. with cracking			
38	W. Oak	6	5.91 W	20.5	43	R. & R. with cracking			
39	W. Oak	6	5.92 W	20.5	44	R. & R. with cracking			
40	W. Oak	6	5.93 W	20.5	45	R. & R. with cracking			
41	W. Oak	6	5.94 W	20.5	46	R. & R. with cracking			
42	W. Oak	6	5.95 W	20.5	47	R. & R. with cracking			
43	W. Oak	6	5.96 W	20.5	48	R. & R. with cracking			
44	W. Oak	6	5.97 W	20.5	49	R. & R. with cracking			
45	W. Oak	6	5.98 W	20.5	50	R. & R. with cracking			
46	W. Oak	6	5.99 W	20.5	51	R. & R. with cracking			
47	W. Oak	6	6.00 W	20.5	52	R. & R. with cracking			
48	W. Oak	6	6.01 W	20.5	53	R. & R. with cracking			
49	W. Oak	6	6.02 W	20.5	54	R. & R. with cracking			
50	W. Oak	6	6.03 W	20.5	55	R. & R. with cracking			
51	W. Oak	6	6.04 W	20.5	56	R. & R. with cracking			
52	W. Oak	6	6.05 W	20.5	57	R. & R. with cracking			
53	W. Oak	6	6.06 W	20.5	58	R. & R. with cracking			
54	W. Oak	6	6.07 W	20.5	59	R. & R. with cracking			
55	W. Oak	6	6.08 W	20.5	60	R. & R. with cracking			
56	W. Oak	6	6.09 W	20.5	61	R. & R. with cracking			
57	W. Oak	6	6.10 W	20.5	62	R. & R. with cracking			
58	W. Oak	6	6.11 W	20.5	63	R. & R. with cracking			
59	W. Oak	6	6.12 W	20.5	64	R. & R. with cracking			
60	W. Oak	6	6.13 W	20.5	65	R. & R. with cracking			
61	W. Oak	6	6.14 W	20.5	66	R. & R. with cracking			
62	W. Oak	6	6.15 W	20.5	67	R. & R. with cracking			
63	W. Oak	6	6.16 W	20.5	68	R. & R. with cracking			
64	W. Oak	6	6.17 W	20.5	69	R. & R. with cracking			
65	W. Oak	6	6.18 W	20.5	70	R. & R. with cracking			
66	W. Oak	6	6.19 W	20.5	71	R. & R. with cracking			
67	W. Oak	6	6.20 W	20.5	72	R. & R. with cracking			
68	W. Oak	6	6.21 W	20.5	73	R. & R. with cracking			
69	W. Oak	6	6.22 W	20.5	74	R. & R. with cracking			
70	W. Oak	6	6.23 W	20.5	75	R. & R. with cracking			
71	W. Oak	6	6.24 W	20.5	76	R. & R. with cracking			
72	W. Oak	6	6.25 W	20.5	77	R. & R. with cracking			
73	W. Oak	6	6.26 W	20.5	78	R. & R. with cracking			
74	W. Oak	6	6.27 W	20.5	79	R. & R. with cracking			
75	W. Oak	6	6.28 W	20.5	80	R. & R. with cracking			
76	W. Oak	6	6.29 W	20.5	81	R. & R. with cracking			
77	W. Oak	6	6.30 W	20.5	82	R. & R. with cracking			
78	W. Oak	6	6.31 W	20.5	83	R. & R. with cracking			
79	W. Oak	6	6.32 W	20.5	84	R. & R. with cracking			
80	W. Oak	6	6.33 W	20.5	85	R. & R. with cracking			
81	W. Oak	6	6.34 W	20.5	86	R. & R. with cracking			
82	W. Oak	6	6.35 W	20.5	87	R. & R. with cracking			
83	W. Oak	6	6.36 W	20.5	88	R. & R. with cracking			
84	W. Oak	6	6.37 W	20.5	89	R. & R. with cracking			
85	W. Oak	6	6.38 W	20.5	90	R. & R. with cracking			
86	W. Oak	6	6.39 W	20.5	91	R. & R. with cracking			
87	W. Oak	6	6.40 W	20.5	92	R. & R. with cracking			
88	W. Oak	6	6.41 W	20.5	93	R. & R. with cracking			
89	W. Oak	6	6.42 W	20.5	94	R. & R. with cracking			
90	W. Oak	6	6.43 W	20.5	95	R. & R. with cracking			
91	W. Oak	6	6.44 W	20.5	96	R. & R. with cracking			
92	W. Oak	6	6.45 W	20.5	97	R. & R. with cracking			
93	W. Oak	6	6.46 W	20.5	98	R. & R. with cracking			
94	W. Oak	6	6.47 W	20.5	99	R. & R. with cracking			
95	W. Oak	6	6.48 W	20.5	100	R. & R. with cracking			

Run by the true meridian. Magnetic variation — degrees — minutes —

Surveyed the 15 & 16 day of November 1899, by

W. A. Rorer

County Surveyor of Ingham County, Michigan

Sec. 35174

Vol 4, pg 5


54

ONONDAGA
township

T 1 N, R 2 W

K-12 7
corner code attachment no.

p. 1 of 1

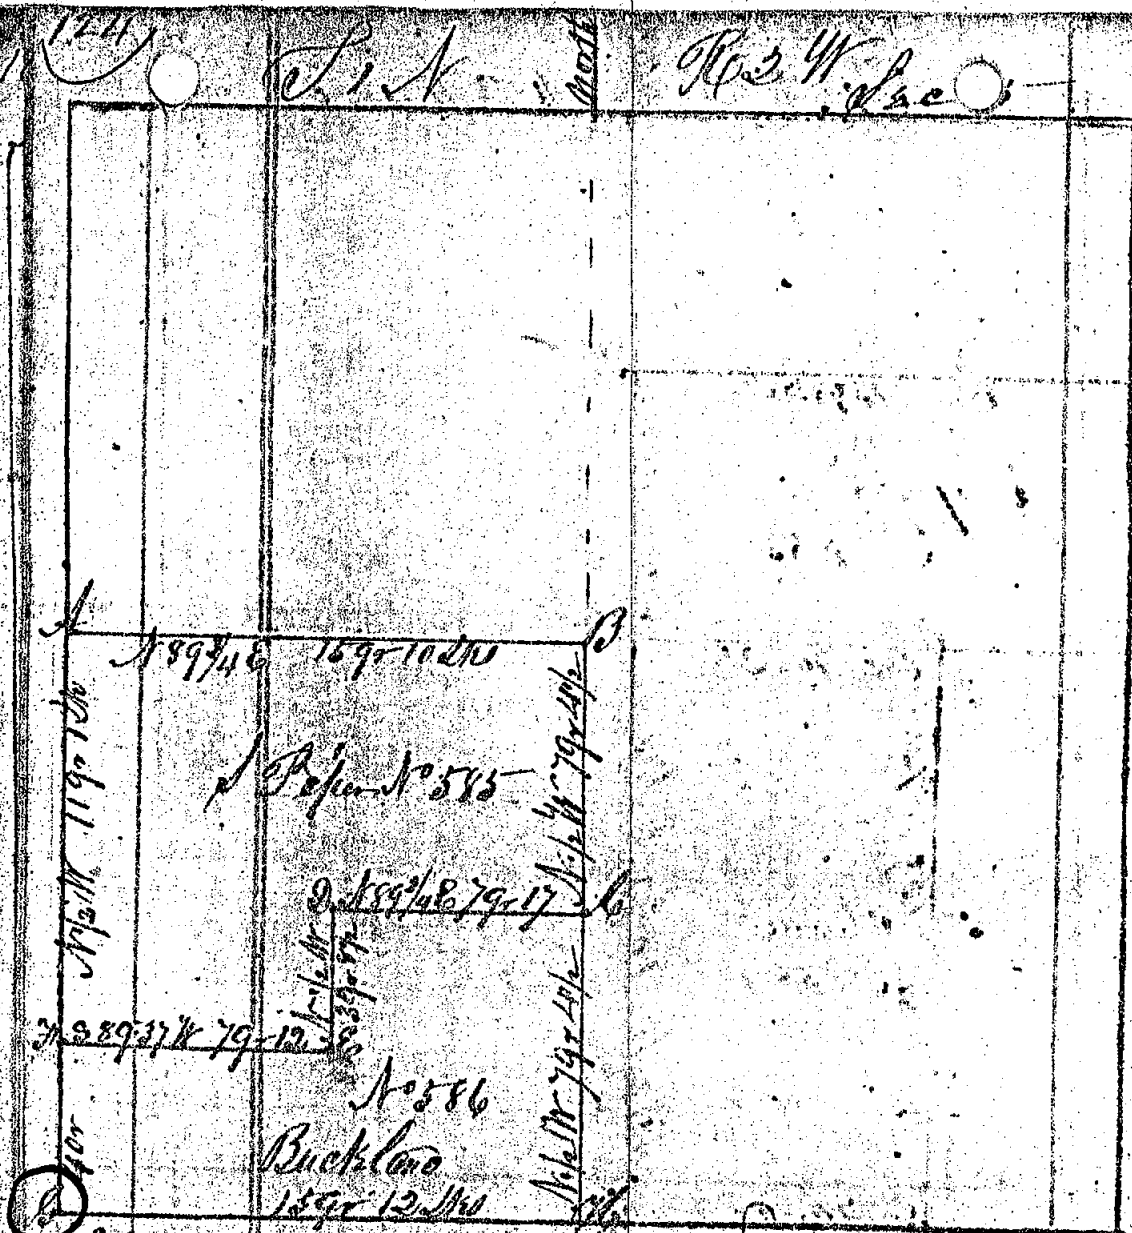

- Elm 18 1/2 North 3 1/2
- Maple 10 1/2 S 60 E 3 1/2
- Birch 16 N 27 1/2 E 3 1/2
- Elm 16 S 46 1/2 W 3 1/2
- W Oak 22 N 27 1/2 E 6 1/2
- Elm 14 N 27 1/2 W 3 1/2
- W Oak 28 S 27 1/2 W 3 1/2
- do 2 S 59 1/2 E 3 1/2
- W Oak 11 S 57 1/2 W 9 3/4
- do 18 N 33 E 4 3/4
- do 24 S 6 E 4 1/2
- do 13 N 34 1/2 E 7 1/4
- Elm 16 N 7 W 12
- do 9 S 13 W 26
- W Oak 1 1/2

SOURCE: Record of Ingham Co. Survey Vol. ²/₃ P. ¹²⁴/₃₄₆/₁₉₀
TRANSCRIBED from ORIGINAL on file at Remonumentation Office
DUPLICATE

190

T. 1 N. R. 2 W.

SECTION 36

K-11

A

19.98 ch.

Rushmore.

39.77 ch.

W 1/2 of NW 1/4.

N^o 1773

N. 87° E.

D S 89° 24' E 19.98 ch. C ... 19.95 ch. ... E

James Culley.
AND
Geo. F. Reed

Sworn chainmen

ONONDAGA
TOWNSHIP

T 1 N, R 2 W

K-11
CORNER CODE

7
ATTACHMENT #

p. 1 of 1

Survey of the North-west quarter of Section No Thirty Six in Township No One North of Range No Two West as shown by the plat.

The corners B.C. & E. were once located by A. Jackson in the year 1839 and recorded in Liber. 1 Page 17. and were found except C. which was located equidistant bet A & E. The corner A was also extinct and was reestablished at the intersection of the section lines East & West and North & South. The corners are perpetuated and described, viz

- 11->* A = Stake & pile for a Maple 9 in. dia. bears S. 77° W. 47 1/2 l.
 " " " " " " 9 " " " S. 5° W. 22 1/2 l.
 B = Stone &c set for the corner
 C = " " Hick 10 " " " S. 77 3/4° E. 50 1/2 l.
 D = Post " " W.O. 18 " " " N. 82 1/2° E. 63 l.
 E = obsolete but a good stake was driven to perpetuate it

Run by the County Meridian Vari allowed 1° 20' E
 Surveyed August 29th 1882

Recorded Dec. 7th 1882 By A. P. Drake
 Co. Surveyor

SOURCE: Foldee Set #1 p. 38

TRANSCRIBED from ORIGINAL on file at Remuneration Office
DUPLICATE

Town 1 N. Range 2 W.

Section No. 11

K-11

Section	Timber.	Diam	Bearing.	Links.	Section	Timber.	Diam	Bearing.	Links.
1966 X	S.W. Oak School	20	189 1/2 E	174 1/2	P	W Oak	21	86 E	77
1967 Y	Cherry	6	87 1/2 N	193	"	" "	13	75 1/2 E	20 1/4
1968 Z	Land	8 1/2	136 1/2 W	43	Q	" "	22	72 1/2 E	61
A	W Oak	18	88 1/2	39	R	W Oak	14	131 1/2 W	35 1/2
B	" "	16	88 1/2 E	70	"	" "	28	82 1/2 W	25 1/2
C	" "	24	87 1/2 W	10	S	" "	2	88 1/2 E	36
D	" "	18	87 1/2	17	"	" "	14	87 1/2 W	93
E	" "	18	101 1/2	5	"	" "	19	153 1/2	125 1/2
F	W Oak	14	86 1/2	82					
G	W Oak	12	82 1/2 W	28 1/2					
H	W Oak	14	87 1/2	40					
I	W Oak	16	77 1/2	31					
J	W Oak	16	86 1/2 W	31 1/2					
K	W Oak	20	84 1/2 E	130					
L	" "	21	83 1/2 W	11					
M	" "	8	105 1/2	34					
N	W Oak	8	83 1/2	35					
Hand O	W Oak	12	138 1/2 W	112					

Run by the true meridian. Magnetic variation 3 degrees 22 minutes W.

Surveyed the 14 day of Oct 1889 by

A. Jackson
County Surveyor of Ingham County, Michigan.

ONONDAGA
TOWNSHIP

T 1 N. R 2 W

K-11
CORNER CODE

70
ATTACHMENT #


p. 1 of 1

SOURCE: Folder # 2 p. 62

TRANSCRIBED from ORIGINAL DUPLICATE on file at Remonumentation Office

T. 1 R. 2 W. Sec 36.

K-11

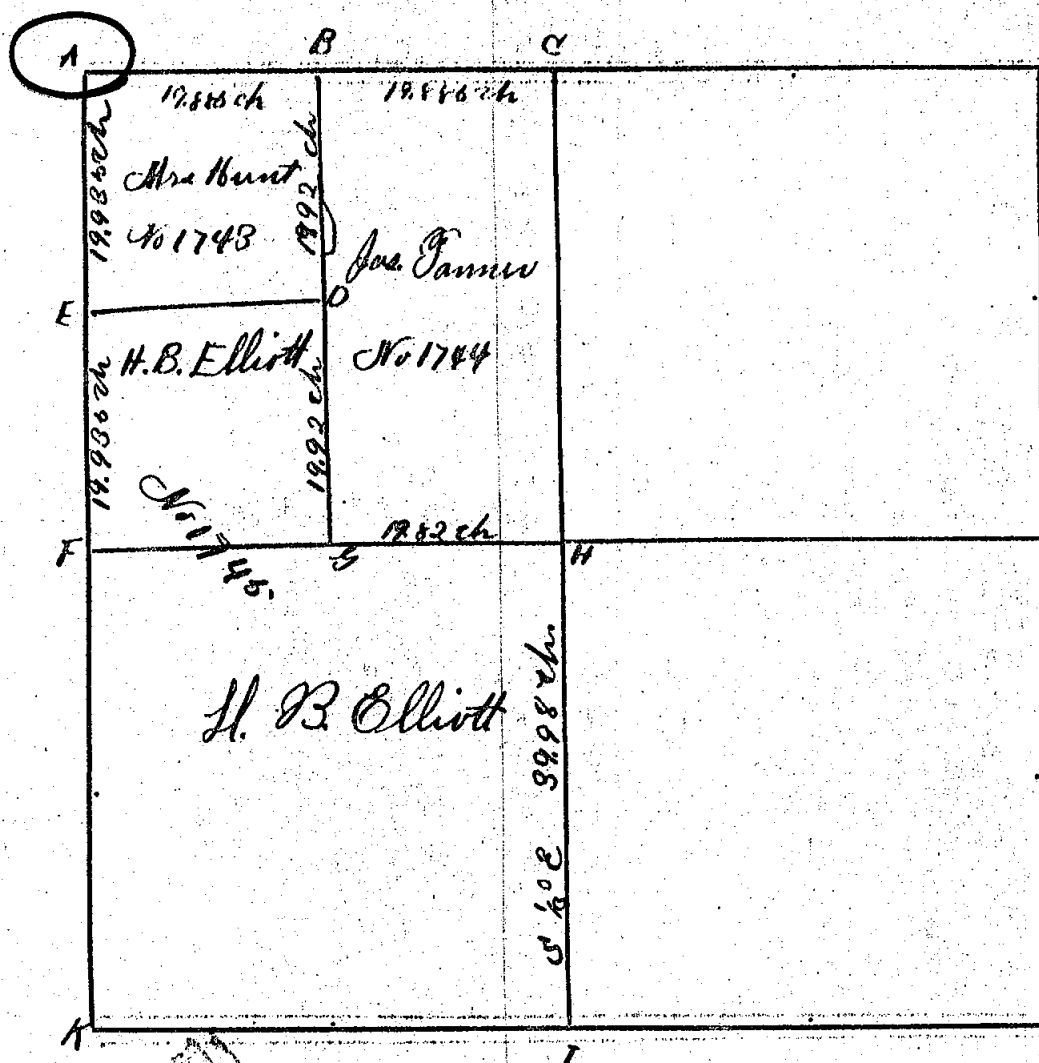

Station	Corner.	Timber.	Bearing.	Links.	Station	Corner.	Timber.	Bearing.	Links.
A	Stone	Hickory	S 70 1/2 E	112 1/2	I	"	B. Oak	N. 7. W	24 1/2
B	Post	N.O. 6	N. 31 E	16 1/2	K	Stake	N.O. 10	S. 50 1/2 E	36 1/2
"	Stone	Hickory	N. 62 W	88 1/2	"	Stone	Hickory	S 62 1/2 W	86
C	Cross	"	N. 4 W	112 1/2					
D	Post	no trees							
E	"	"	"						
F	Stone	Hickory	S 72 1/2 W	10					
"	"	B. Oak	N. 65 1/2 W	42 1/4					
G	Stake	N.O. 14	S 48 1/2 W	12 3/4					
"	Stone	Hickory	N. 47 E	6					


ONONDAGA T. 1 N. R. 2 W. TOWNSHIP

K-11 CORNER CODE

B11 p. 1 of 1 ATTACHMENT #

SOURCE: Folder # 5 of # 2 p. 36
 TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at Remonumentation Office

T. 1 N. R. 2 W. Sec 25

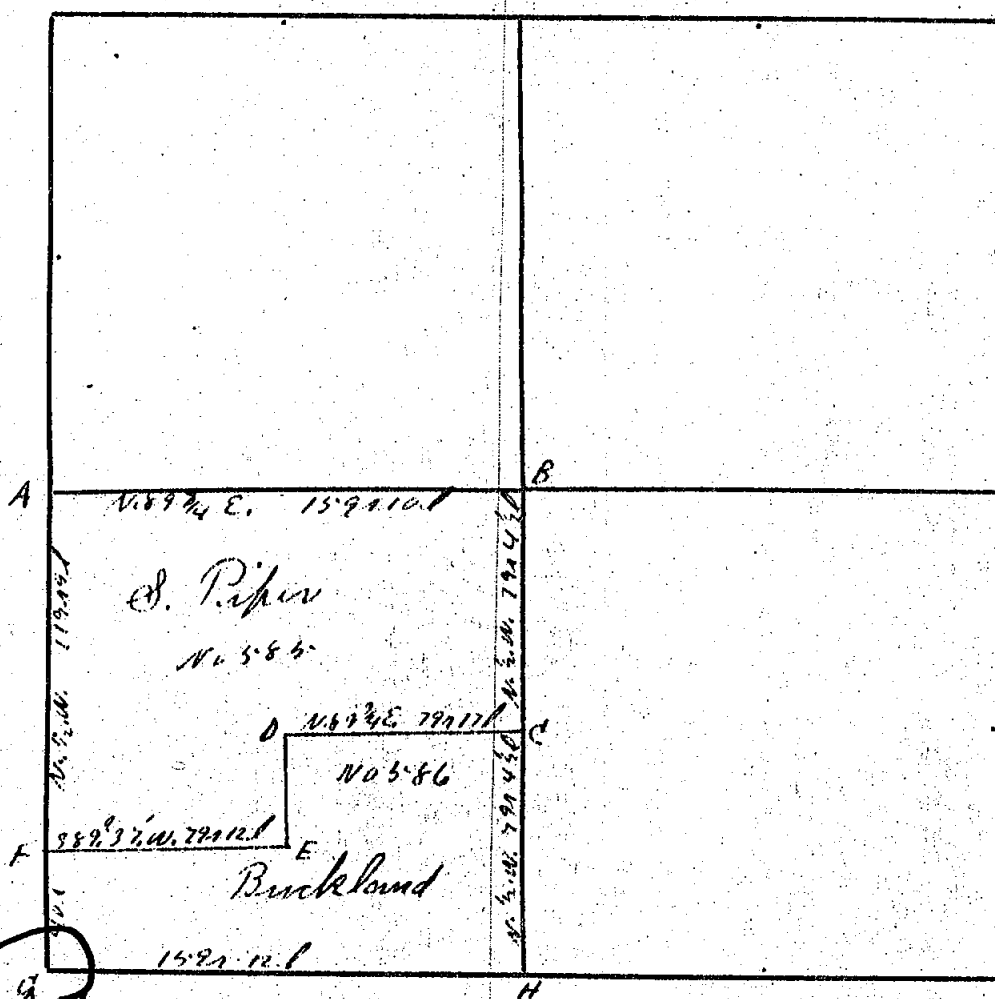

Station	Corner.	Timber.	Bearing.	Links.	Station	Corner.	Timber.	Bearing.	Links.
A		Elm 18	with	5	G		Elm 9	S. 12. W.	26
"		Maple 10	S. 60. E	22	H		Poplar 6	S. 60. W	30
B		Blk. 16	N. 27 1/2 E	34	"		B.D. 8	N. 50 1/2 E	17
"		Elm 16	S. 46 1/2 W	31 1/2					
C		W.D. 22	N. 27 1/2 E	61					
"		Elm 14	N. 31 1/2 W	38 1/2					
D		W.D. 28	S. 21 1/2 W	25 1/4					
"		" 2	S. 89 1/2 E	36					
E		" 14	S. 89 1/4 W	73					
"		" 18	N. 53. E	45 1/2					
F		" 24	S. 6. E	47					
"		" 13	N. 54 1/2 E	70 1/4					
"		Elm 16	N. 6' W	12					

11 → A