


J. N. K. C. Stockbridge Section No 31

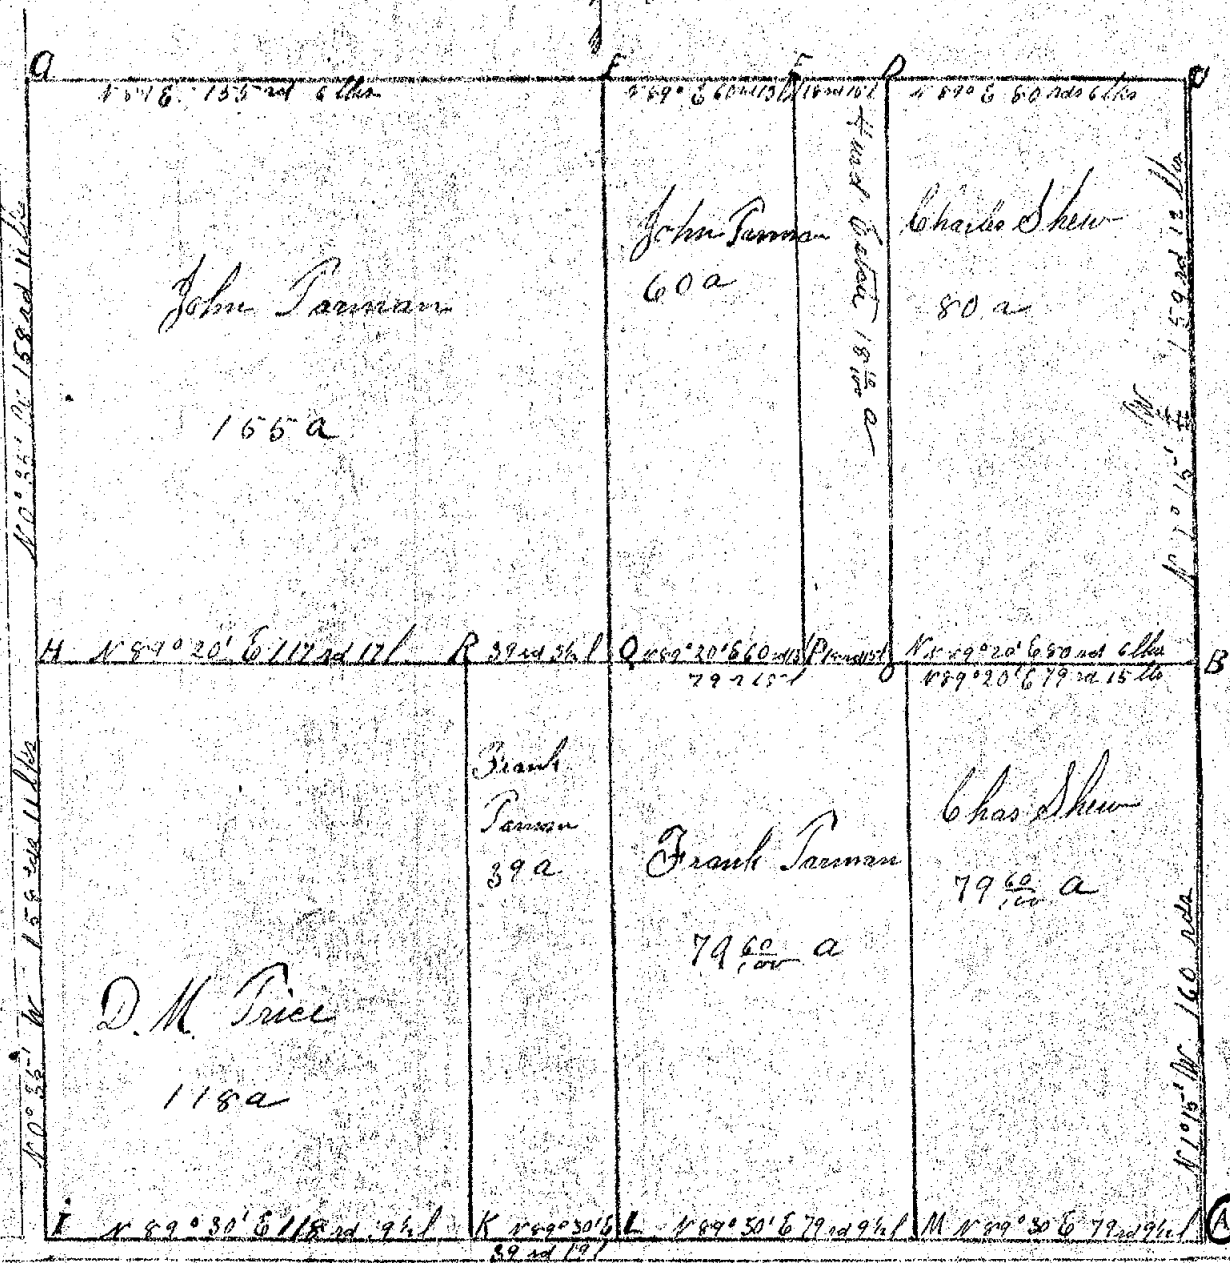

Survey Number 1808

Entire Section

Station	Corner	Timber	Bearing	Link	Station	Corner	Timber	Bearing	Link
A	East Iron in	WO 24	N 2 1/2 E	37 1/2	J	Side + east iron	Maple 2	N 5 1/2 E	44 1/2
B	Stone +	Hickory 3	N 3 7/8 W	16	K	Side	Elm 10	N 5 1/2 W	69
C	Stake	RO 12 in	S 1/8	17	L	Brick	Elm 10	N 7 1/2 E	19 1/2
D	Stake	RO 7 in	N 5 1/4 W	9	M	Stone	Elm 10	N 7 1/2 E	19 1/2
E	Stake	RO 5 in	N 7 1/4 W	9	N	Stone	Elm 10	N 7 1/2 E	19 1/2
F	Stone	Poplar 6 in	S 6 1/2 W	8 1/2	O	East Iron	Maple 10	S 3 1/2 W	42
G	Stone	WO 16	N 8 1/4 W	91	P	corner	" " 26	N 6 W	21
H	Shag	Barnack 9	S 1 1/4 E	50	Q	Side +	Maple 9	N 3 1/4 E	25
I	Stake	RO 24	S 2 1/2 W	34	R	Stone	Maple 9	S 1 1/2 W	7
J	Stake	RO 23	S 2 1/2 E	27	S	Stone	Maple 14	S 1 1/4 E	25
K	Stake	Maple 12	S 5 3/4 W	99	T	Stone	Maple 6	S 6 1/2 E	12 1/2
L	" " "	" " 22	N 15 1/2 W	184	U	Long Stone	No tree	N side flat	at N side corner
M	Stone	WO 14	N 40 W	91 3/4					
N		WO 16	N 10 E	104 1/2					
O	Still found at bottom 1st N of Raynes corner	WO 16	N 83 E	94 1/4					
P		Hickory 8	S 2 1/4 E	106					

Vol 3 pg 215

ING. Co. SURVEYOR: V. 3 p. 215 yr. 1890

The Township corner at SW corner of section 81 was located by the bearing trees named in the survey of M.H. Raynor of section No 36 of Bunkerhill surveyed March 1st 1865 and recorded on Page 18 Lib 3 of County surveys. The West 1/4 post I locate by measurement and set a steel journal which is 1 1/2 m North of a stone supposed to be Raynor's corner West the witnesses are returned the NW corner I locate by Raynor's Bearings recorded on page 16 of Lib 3 County surveys as is also the case with the North 1/4 sec post the 1/4 post on the East side of the section is located by one of the original M.H. Raynor's bearings and the NE corner is located by the original bearings the stumps of which remain and the line tree noted in M.H. Raynor's survey at 59.94 chains and given as 9 in diam is still good and the measurements agree the SE corner was extinct and established by a Transit line from the NE corner run over the 1/4 sec post and on to the Township line all other corners are set at average distance Except in the case of the E 1/2 of NE 1/4 which is deeded as 80 acres and the W 60 acres of the W 1/2 of the NE NE 1/4 which is deeded as 60 acres in those two cases the full amount of land is given the lines whose bearings are not given were not changed the 1/4 post lines were both run and corrected then placing the corner A in Transit line between the respective 1/4 sec posts the abbreviating BTL are bearing lines identified O.P. old post found Surveyed upon petition of John Parnan, Frank Parnan, D.M. Price and Charles Shaw February 6th 7th & 8th 1890
 Frank Parnan and Charles Price
 Sworn Chairman

Recorded February 17th 1890.


John McCreary

County Surveyor
 Ingham County
 Michigan

COUNTY SURVEYOR'S RECORD,

TOWN One NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

SEC. 30

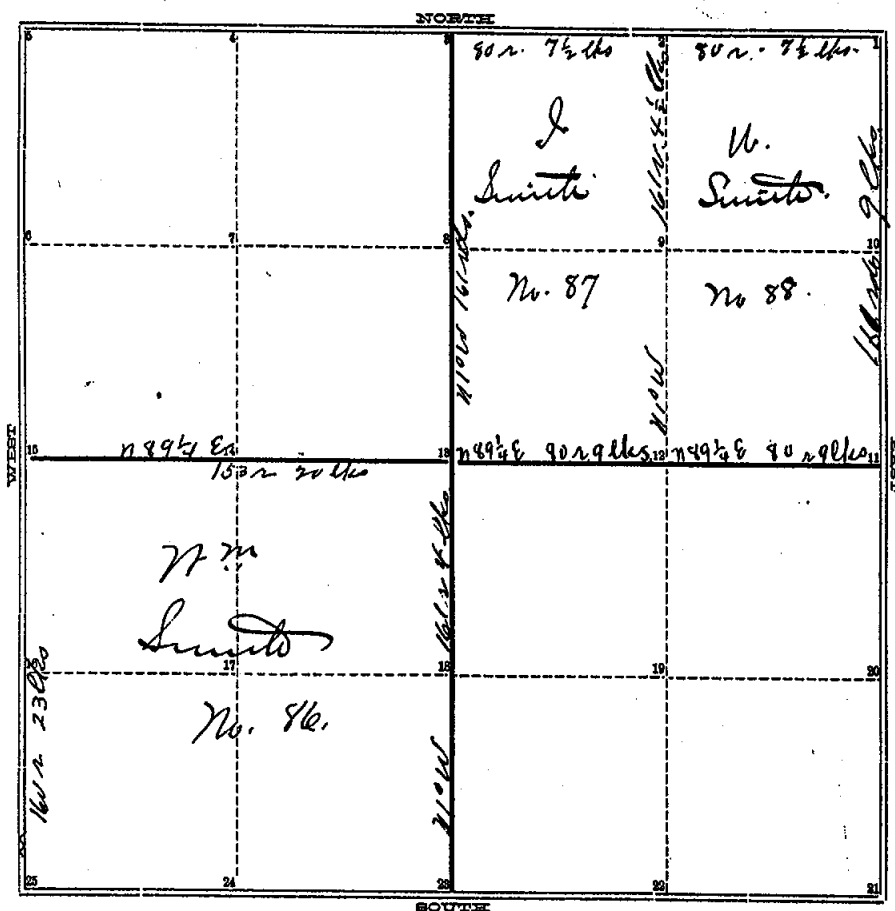

Vol. 1, P. 11.

TOWN One NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

Aspen 9 in S 44 1/2 E 15 1/2 lks
 1 " 19 " S 80 E 18 1/2 "

2 Marked in Marsh
 N. Oak 9 in N 84 1/2 E 4 3 lks
 3 13 " 12 " N 28 E 10 1/2 "

24
 25 N. Oak 9 in N 58 E 30 lks
 26 " 32 " S 64 E 44 "

4

5

6

7

8

9

10 B. Oak 12 in N 18 1/2 E 44 lks
 11 N. " 16 " S 16 E 29 "
 12 " 18 " S 34 1/2 W 24 "
 13 " 18 " S 24 1/2 E 58 "

14 In Marsh.

15

16 Hickory 18 in N 11 E 46 lks
 17 Y. Oak 14 " S 31 1/2 E 26 1/2 "

18

19

20

21

22

23 Aspen 9 in S 75 1/2 W 55 lks No Oak Tree.

INGHAM COUNTY, MICHIGAN.


TOWN Butte NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

Run by the true Meridian Variation $3^{\circ}20'$ East
Revised May 23, 1870 by A. Jackson.
County Surveyor for the County of Ingham.

COUNTY SURVEYOR'S RECORD,

TOWN One NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.SEC. 31

Oscar Earl
A. C. Lawrence
Sworn
Chainmen

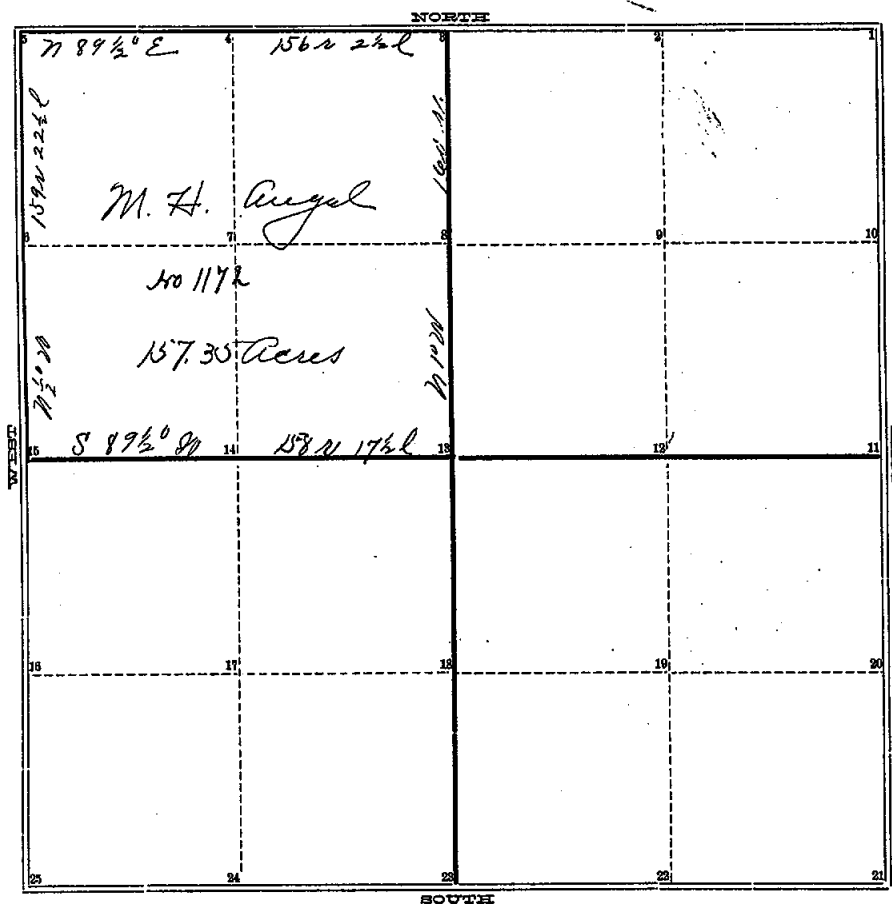TOWN One NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20

24
25

Vol 1 pg 22

INGHAM COUNTY, MICHIGAN.


TOWN One NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

Survey of the North West quarter of Section No. Thirty one in Township No. One North of Range No. Two East. Commencing at the section corner of 30 & 31 running thence $N 89\frac{1}{2}^{\circ} E$ One hundred fifty six rods & two and one half links to quarter post between sections 30 & 31 represented by "3" in the plat from which a Sap. Oak 22 inches bears $N 15\frac{1}{4}^{\circ} W$, 184 l & 20 inches $S 53\frac{1}{2}^{\circ} W$, 89 lks; thence $S 1^{\circ} E$ one hundred & sixty rods to "13"; wit B. Oak 5 inches $N 77\frac{1}{2}^{\circ} W$, 47 lks and W. Oak 2, $N 17^{\circ} W$, 14 lks. Thence $S 89\frac{1}{2}^{\circ} W$, 158 r 17 l to "15" from a B. Cherry 4 $N 89\frac{1}{4}^{\circ} E$, 63 l. & a W. Oak 5 inches $N 13\frac{1}{2}^{\circ} E$, 167 l; thence $N 1\frac{1}{2}^{\circ} W$, 159 r 22 l to place of beginning. Represented by "5" from which a W. Oak 4 inches bears $N 16^{\circ} E$, 164 lks, & 206 inches $N 16\frac{1}{2}^{\circ} W$ 19 l.

Containing 157.35 acres of land more or less
 Run by the True Meridian Var. $2\frac{3}{4}^{\circ} E$ Mar. 7, 1865 by
 Wm. H. Rayner, C. Surv. Gen. Co., Mich.

COUNTY SURVEYOR'S RECORD,
TOWN One NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

SEC. 31

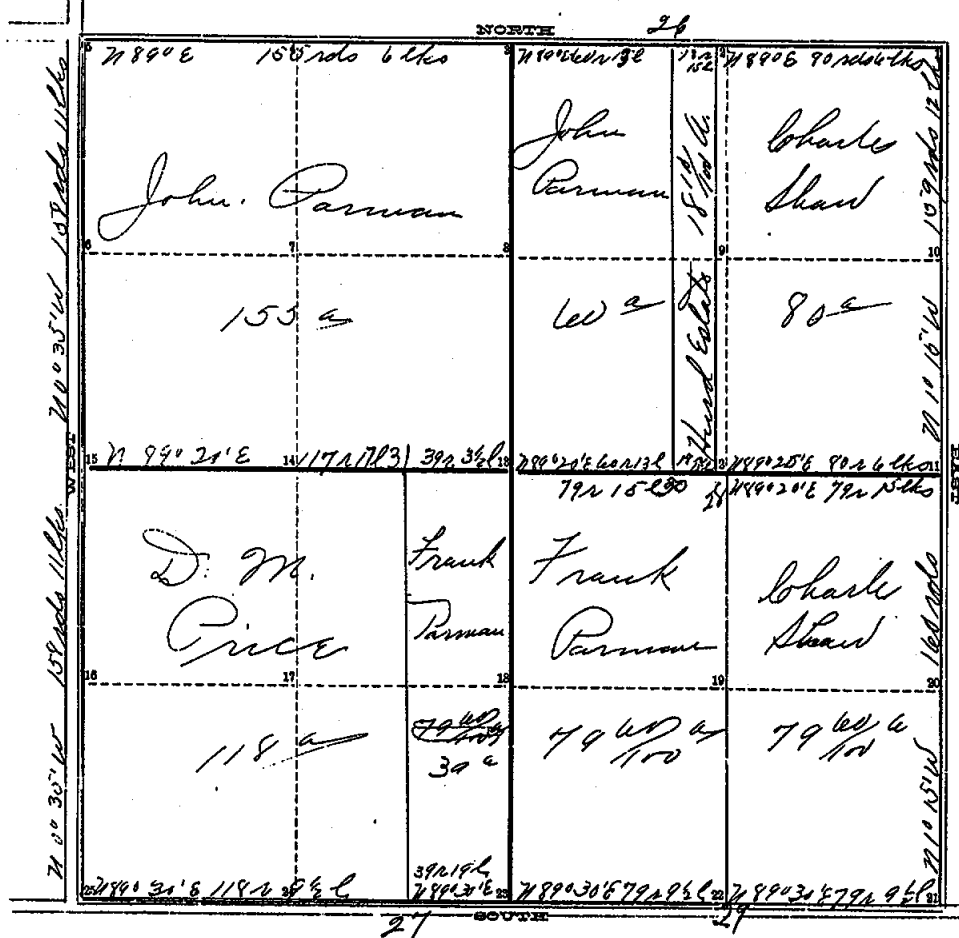

TOWN _____ NORTH, RANGE _____, MERIDIAN OF MICHIGAN.

- [illegible]

INGHAM COUNTY, MICHIGAN.

231

TOWN One North, RANGE Two East, MERIDIAN OF MICHIGAN.

The township corner at S. N. cor of section 31 was located by the bearing trees named in the survey of W. H. Rayner of section No 36 of Bunkerhill surveyed Mar. 1st 1865 and recorded on page 25 of this book of County Surveys. The west 1/4 post - I locate by measurement and set a steel journal which is 1 link north of a stone supposed to be Rayner's corner but the witnesses are extinct. The N. W. corner I locate by Rayner's Bearings recorded on page 22 of this book of County Surveys also is also the case with the north 1/4 post. The 1/4 post on the east side of the section is located by one of the original U. S. bearings and the N. E. corner is located by the original bearings. The stump of which remain and the line tree noted in U. S. Survey at 59.94 chains and given as 9 inches in diameter is still good and the measurements agree. The S. E. corner was extinct and established by a transit line from the N. E. corner run over the 1/4 post and on to the township line. All other corners are set at average distance. Except in the case of the E 1/2 of the N. E. 1/4 which is deeded as 80 acres and the N. E. 1/4 of the W 1/2 of the N. E. 1/4 which is deeded as 40 acres, in these two cases the full amount of land is given. The lines whose bearings are not given were not chained. The 1/4 post lines were both chained and corrected thus placing the corner (13) in transit line between the respective 1/4 posts. The abbreviations B. T. I. are bearing trees identified to O. P. to old post found. Surveyed upon petition of John Parman, Frank Parman, D. M. Price and Chas. Shedd.


Feb. 16th, 7th & 8th 1890

Frank Parman & Charles Price Sworn Chairmen.

Recorded Feb 17th 1890

John M. Creamer,
County Surveyor,
Ingham County,
Michigan.

COUNTY SURVEYOR'S RECORD,

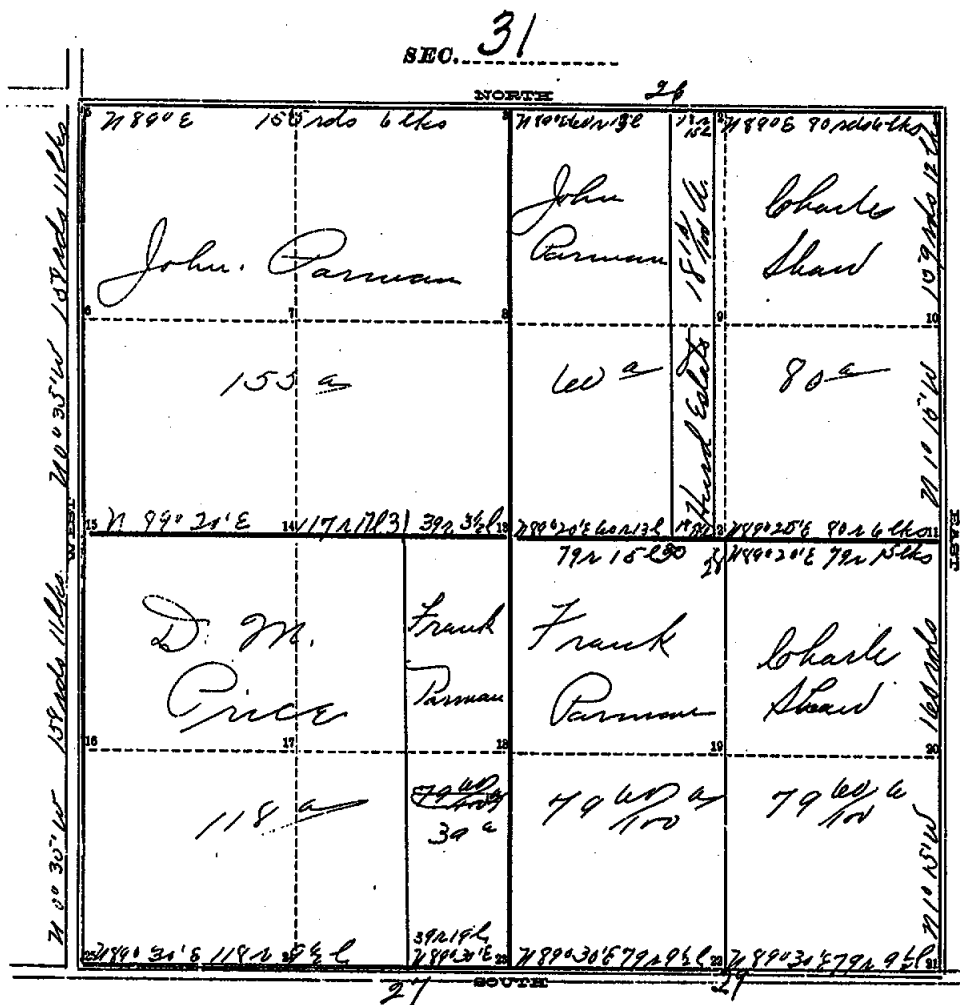TOWN One NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

TOWN _____ NORTH, RANGE _____, MERIDIAN OF MICHIGAN.

1. Stake to T.T.S. RO 7 N50 4 W 7
 2. Plow share 07.7. " " S 74 4 E 9 7 1/2 S 6 W 8 1/2
 3. Plow " 16 7 8 4 1/2 W 9 1
 4. Shovel " 9 7 17 3/4 E 50
 5. Stake " 12 7 8 3 1/2 W 8 4
 6. " " 22 7 15 1/2 W 18 4
 7. Stone " 14 7 4 0 W 9 1 3/4
 8. " " 16 7 16 E 10 4 1/2
 9.
 10.
 11. Stake to T.T.S. Hickory 3 7 37 W 16
 12. Stake " R. 12 3 1 E 17
 13. Stake " 26 7 34 E 20
 14. Stone Maple 9 8 16 W 7
 15. Stake " Hick 6 S 61 E 17 1/2
 16. Stake Journal with whetstone 7 16 16 N 83 E 40 1/2
 17. Stake " 7 17 16 N 83 E 40 1/2
 18.
 19.
 20.
 21. Cap. iron in 70. 24 7 24 E 37 1/2
 22. " " 22 7 24 E 37 1/2
 23. " " 22 7 24 E 37 1/2
 24. " " 22 7 24 E 37 1/2
 25. " " 22 7 24 E 37 1/2
 26. " " 22 7 24 E 37 1/2
 27. " " 22 7 24 E 37 1/2
 28. " " 22 7 24 E 37 1/2
 29. " " 22 7 24 E 37 1/2
 30. " " 22 7 24 E 37 1/2
 31. " " 22 7 24 E 37 1/2
25. Iron and cast 7 Maple 2 7 52 E 7 4 1/2
 26. Iron and cast 7 Maple 2 7 52 E 7 4 1/2
 27. Plow share Elm 10 7 51 1/2 W 6 9
 28. Cast iron 7 10 S 32 1/2 W 4 2
 29. Iron plow joint 7 10 S 32 1/2 W 4 2
 30. Stone 7 14 S 17 1/2 E 20
 31. Long stone 7 10 S 32 1/2 W 4 2
- Vol 1 pg 231

INGHAM COUNTY, MICHIGAN.

231

TOWN One NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

The township corner at S. N. cor of section 31 was located by the bearing trees named in the survey of N. H. Rayner of section No 36 of Bunkerhill surveyed Mar. 7th 1865 and recorded on page 25 of this book of County Surveys. The west 1/4 post - I locate by measurement and put a steel journal which is 1 link north of a stone supposed to be Rayner's corner but the witnesses are extinct. The N. W. corner I locate by Rayner's Bearings recorded on page 22 of this book of County Surveys also is also the case with the North 1/4 post. The 1/4 post on the east side of the section is located by one of the original U. S. bearings and the N. E. corner is located by the original bearings. The stump of which remain and the line tree noted in U. S. Survey at 59.94 chains and given as 9 inches in diameter is still good and the measurements agree. The S. E. corner was extinct and established by a transit line from the N. E. corner run over the 1/4 post and on to the township line. All other corners are set at average distance. Except in the case of the E 1/2 of the N. E. 1/4 which is deeded as 80 acres and the N. E. 1/4 of the W 1/2 of the N. E. 1/4 which is deeded as 60 acres, in those two cases the full amount of land is given. The lines whose bearings are not given were not chained. The 1/4 post lines were both chained and corrected thus placing the corner (13) in transit line between the respective 1/4 posts. The abbreviation B.T.I. are bearing trees identified & O.P. to old post found. Surveyed upon petition of John Carman, Frank Carman, D. M. Price and Chas. Shad. Feb. 16th, 7th & 8th 1890

Frank Carman & Charles Price Sworn Chairmen.

Recorded Feb 17th 1890

John M. Crease,
County Surveyor,
Ingham County,
Michigan.

SOURCE:

Records Co. Survey Vol. 3 Page 215 1890

TRANSCRIBED from

DUPLICATE

on file at

Records Office

215

The Township range at SE corner of section 81 was located by the bearing tree found in the survey of W.H. Raymer of section No 36 of Bunkerhill Survey March 1st 1890 and recorded on Page 18 Side 5 of County Survey. The NW 1/4 post I locate by measurement and set a steel journal which is 1/4 mile North of a stone supposed to be Raymer corner West the distances are correct, the NW corner I locate by Raymer's Bearings recorded on page 16 of Side 5 County Survey as is also the case with the North 1/4 sec post the 1/4 post on the East side of the section is located by one of the original M.S. Bearings and the NE corner is located by the original bearings the stumps of which remain and the line tree noted in M.S. Survey at 59.94 chains and given as 9 in diam is still good and the measurements agree the SE corner was extinct and established by a Transit line from the NE corner run over the 1/4 sec post and over to the Township line all other corners are set at average distance Except in the case of the E 1/2 of N 1/2 1/4 which is divided as 50 acres and the NW 1/4 of the N 1/2 of the N 1/2 1/4 which is divided as 60 acres in those two cases the full amount of land is given the lines whose bearings are not given were not changed the 1/4 post lines were both run and corrected then placing the corner A in Transit line between the respective 1/4 sec posts the observations BT 1 are bearing trees identified as a post found surveyed upon petition of John Raymer Frank Parman, D.M. Price and Charles Allen Fishman 6th 7th & 8th 1890
Frank Parman and Charles Price
Survey Chainmen

Recorded February 17th 1890

John McCreary,

County Surveyor

Barabara County

SOURCE :

RECORD CO. SURVEYOR Vol. 3 PAGE 215 Yr 1890

TRANSCRIBED from

DUPLICATE

on file at


REMER. OFFICE

215

SOURCE: RECORD Co. SURVEY Vol. 3 PAGE 215 1890
TRANSCRIBED from ORIGINAL on file at RECORD OFFICE
DUPLICATE

215

T1N R2E Stockbridge Section No 31

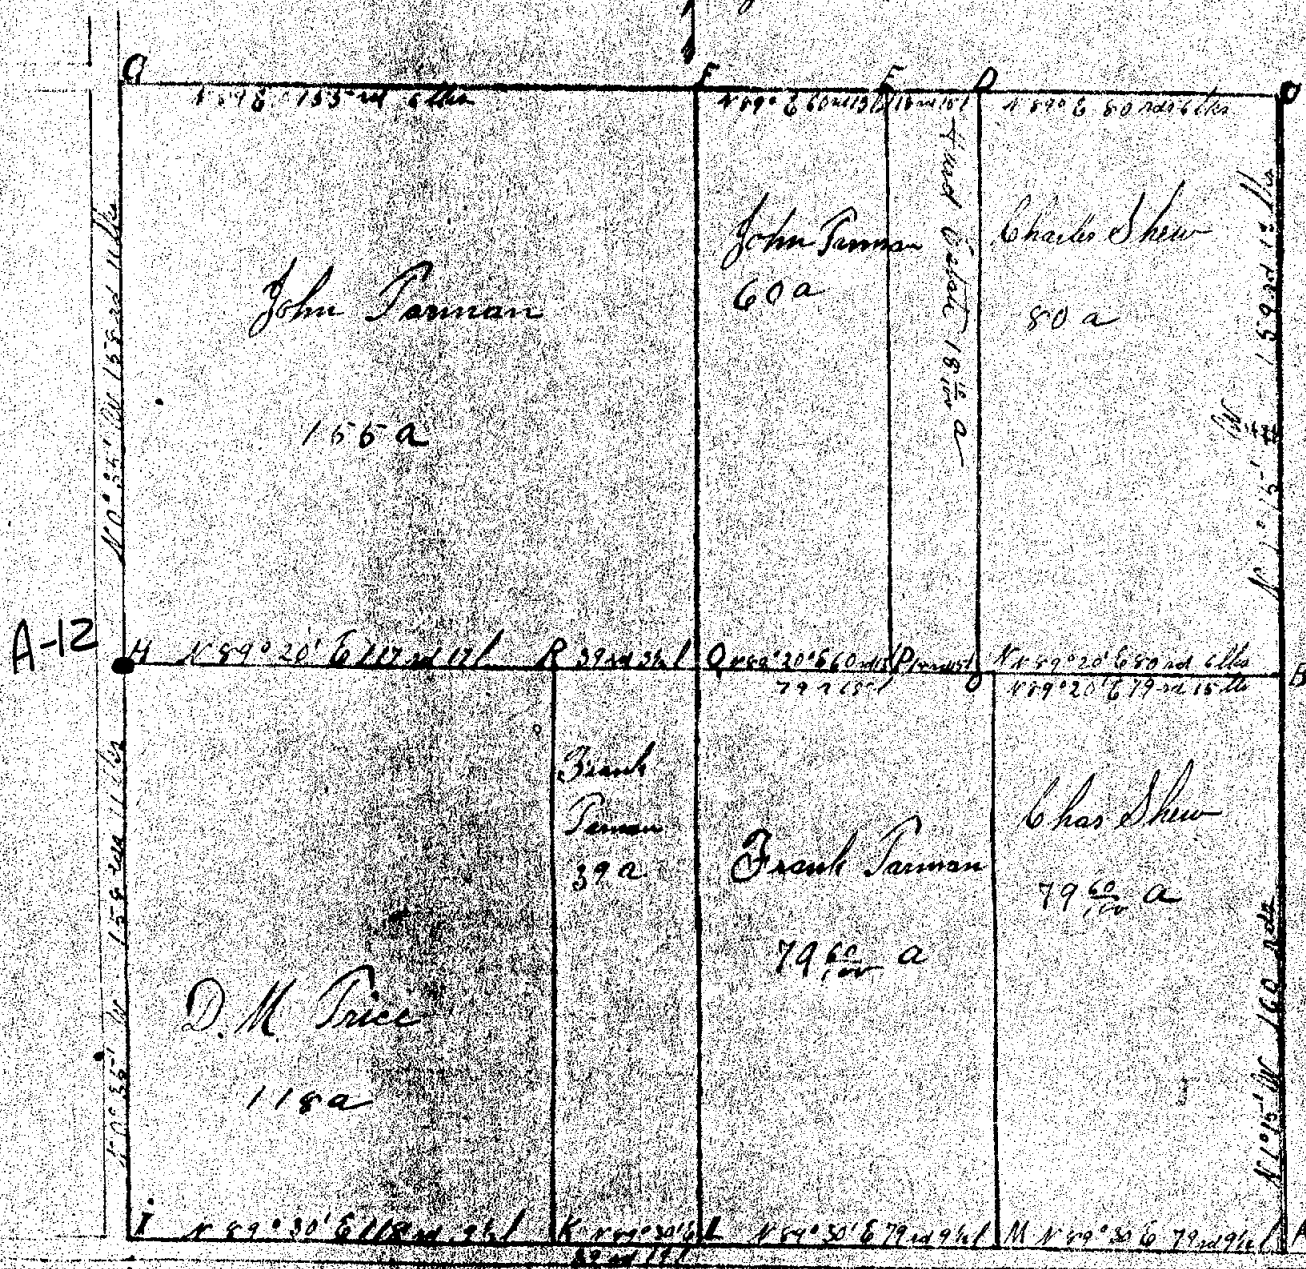

SOURCE:


Records Co. Supreme Vol. 3 Page 16 Yr 1865

TRANSCRIBED from

~~ORIGINAL~~
DUPLICATE

on file at

Record Office

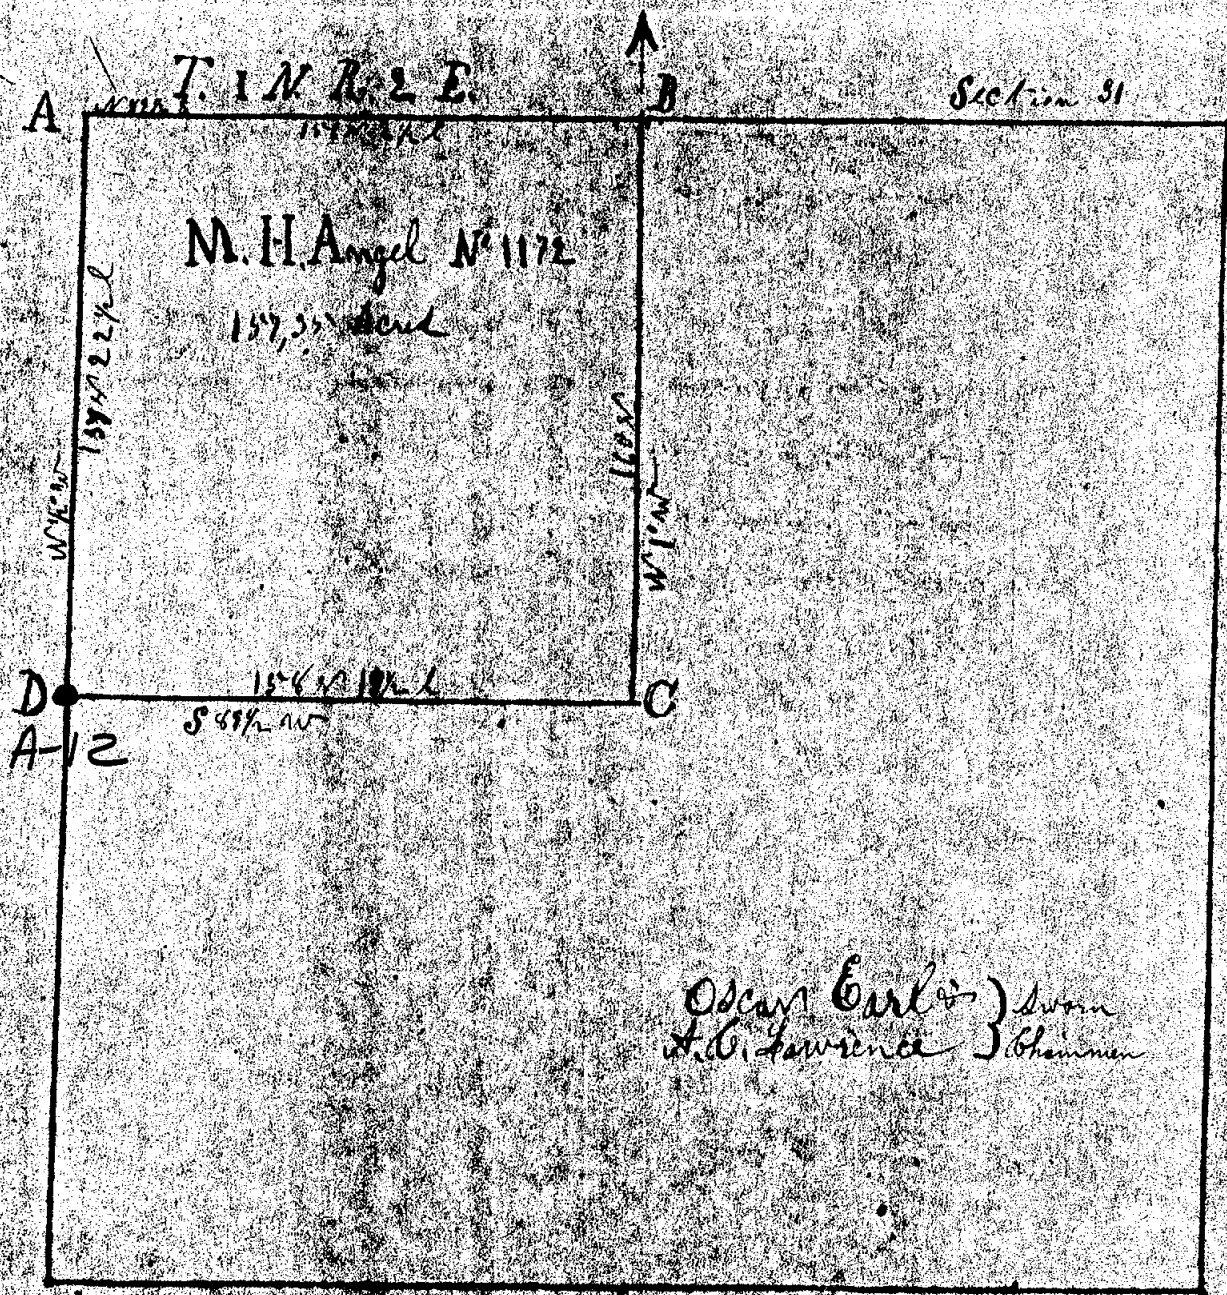

Survey of the North West quarter of section No thirty one and Township No one North Range No two East. Commencing at the section corner of 50 & 51 & running thence N 89 1/2° E one hundred fifty six rods to two and one half links to quarter post between sections 50 & 51 from which a deep Oak 12" has N 15 1/4° W 164 l. & S 89 1/2° W 69 l. thence S 1° E one hundred & sixty rods to C with 12 Oak 11" N 77 1/2° W 47 l. & W. Oak 11" N 87° W 14 l. thence S 89 1/2° W 158 x 12 1/2 l. to D from a 6 Cherry 4 W 89 1/2° E 63 l. & a Oak 5" N 15 1/2° E 167 l. thence N 1/2° W 158 x 22 1/2 l. to place of beginning represented by A from which a W. Oak 4" has N 16 1/2° W 181 l. & a 6" N 16 1/2° W 181 l. Containing 157,35 acres of land more or less. Run by the true Meridian Nov 27th & March 2nd 1865 by William H. Rogers County Surveyor for Michigan.

SOURCE: NOTHSTINE NOTES

TRANSCRIBED from ~~ORIGINAL~~ on file at REMON. OFFICE
DUPLICATE

Township: Stockbridge
Section: 12

3 - Iron tile

15" walnut NW 60.9

12" jack pine SSW 57.6

2" elm SE 78.8

Steel anch. post in conc. NE 40.4

A-13 RECORDED

B - Axle shaft tile

14" walnut WNW 28.7

18" walnut NW 46.7

14" elm NE 73.5

1 1/2" iron post Sec 36 Punk. N 9.1

A-12 UNRECORDED

2 - Large stone (split) axle shaft under

14" elm W 107.4

iron road sign ENE 33.3

1 1/2" iron set E 33.0


fence anch. post SW 43.8

Fence anch. post WSW 44.6

A-11 RECORDED

SOURCE: Index # 1 P. 41

TRANSCRIBED from RECORD on file at RECORD OFFICE
DUPLICATE

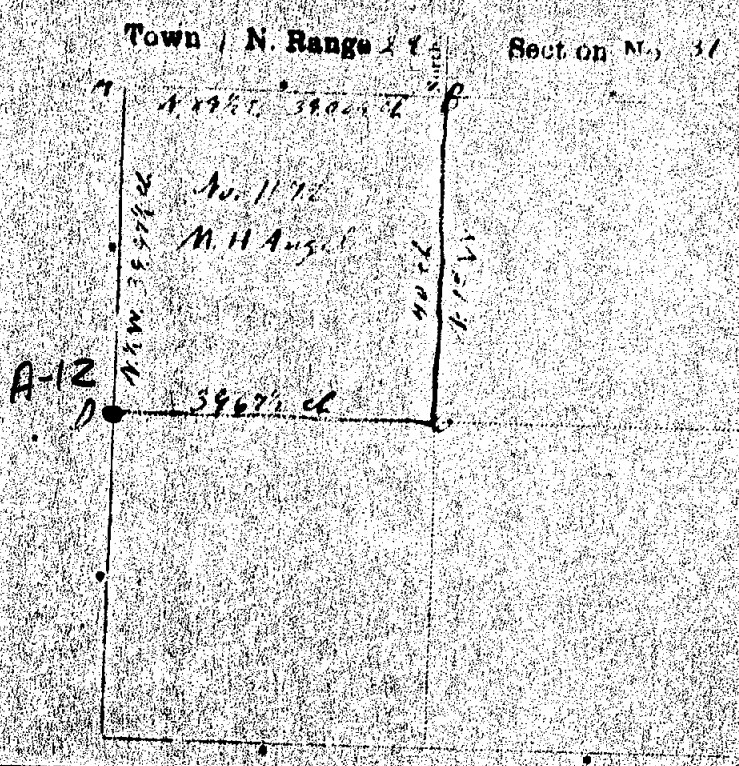

Station	Timber	Diam	Bearing	Links	Station	Timber	Diam	Bearing	Links
4	W. Oak	4	N. 16 E.	104 1/2					
"	"	6	N. 16 1/2 W.	141					
11	Swamp Oak	22	N. 15 1/4 W.	154					
"	"	5	S. 5 1/2 W.	89					
6	B "	5	N. 77 1/4 W.	11					
"	W "	2	N. 17 W.	14					
A-12	B. Cherry	11	N. 19 1/2 E.	63					
"	W. Oak	3	N. 13 1/2 E.	167 1/2					

Run by the true meridian. Magnetic variation 2 degrees
45 min. E. Surveyed the 2 day of March
1866 by Wm. H. Rogers
County Surveyor Ingham County, Michigan

Sec. 31