


CERTIFICATE OF SURVEY

LEGAL DESCRIPTION: (See page 2)

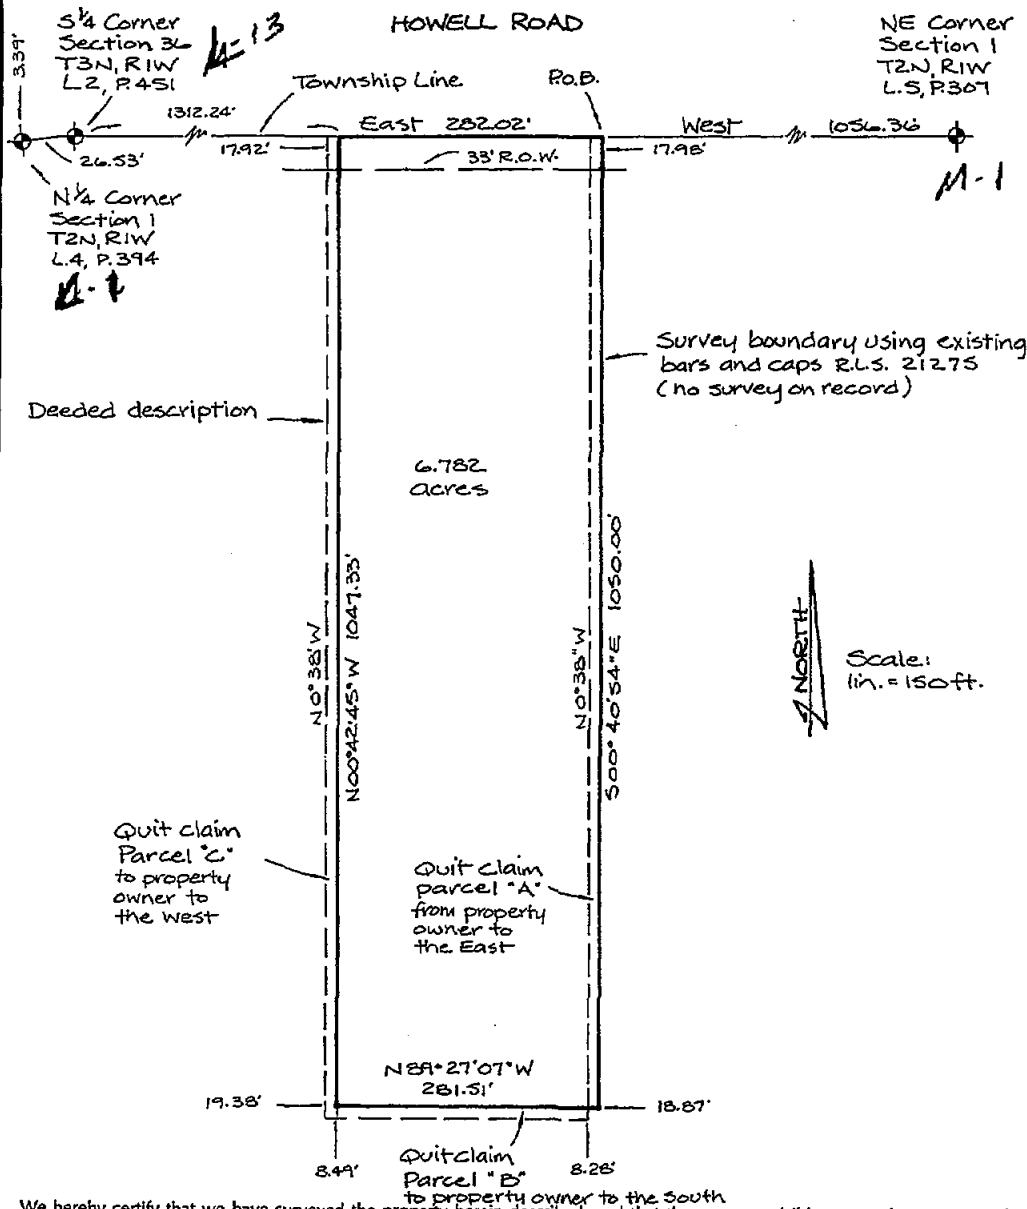


We hereby certify that we have surveyed the property herein described, and that there are no visible encroachments upon the above described property, except as shown hereon.

We further certify that we have fully complied with the requirements of Section 3, Public Act 132 of 1970, and that the ratio of error of closure of this survey is no greater than 1/5000.

LEGEND

- Set Iron
- Found Iron
- Fence Line
- R Recorded Distance
- M Measured Distance
- D Deeded Distance



ACCOLADE, INC.

Land Surveying and Planning Specialists
807 Kerns Rd., Suite 101, Mason, Mich. 48854
Phone 517-676-1580

FOR: Eugene and Rebecca Henry
605 W. Howell Rd.
Mason, Michigan 48854

FIELD R.H.G.R.

DATE 2/21/91

DRAWN M.L.M.

SURVEY NO. 911580 B

CHECKED R.H.G.R.

SHEET 1 OF 2

Ron Helsel
RON HSEL R.L.S. No. 18994

CERTIFICATE OF SURVEY

LEGAL DESCRIPTION:

PREVIOUSLY DESCRIBED IN LIBER 1668, PAGE 722 AS:

BEGINNING AT A POINT 1074.34 FEET WEST OF THE NORTHEAST CORNER OF SAID SECTION 1; THENCE S0°38'E, 1058.1 FEET; THENCE N89°29'56"W, 282 FEET; THENCE N0°38'W, 1055.63 FEET TO THE NORTH LINE OF SAID SECTION 1; THENCE EAST ALONG SAID NORTH LINE 282.0 FEET TO THE POINT OF BEGINNING. SECTION 1, T2N,R1W, 6.85 ACRES, SUBJECT TO ALL EASEMENTS AND RESTRICTIONS OF RECORDS.

HEREIN SURVEYED AND DESCRIBED AS:

BEGINNING ON THE LINE COMMON TO SECTION 1, T2N,R1W, VEVAY TOWNSHIP AND SECTION 36, T3N,R1W, ALAIEDON TOWNSHIP, INGHAM COUNTY, MICHIGAN AT A POINT 1056.36 FEET WEST FROM THE NE CORNER OF SAID SECTION 1, T2N,R1W; THENCE S00°40'54"E, 1050.00 FEET; THENCE N89°27'07"W, 281.51 FEET; THENCE N00°42'45"W, 1047.33 FEET TO THE COMMON LINE BETWEEN SAID SECTIONS; THENCE EAST ALONG SAID LINE, 282.02 FEET TO THE POINT OF BEGINNING. CONTAINING 6.782 ACRES AND. SUBJECT TO A RIGHT-OF-WAY OVER THE NORTH 33 FEET FOR PUBLIC ROAD PURPOSES.

QUIT CLAIM PARCEL "A" (FROM PROPERTY OWNERS TO THE EAST):

BEGINNING ON THE LINE COMMON TO SECTION 1, T2N,R1W, VEVAY TOWNSHIP AND SECTION 36, T3N,R1W, ALAIEDON TOWNSHIP, INGHAM COUNTY, MICHIGAN AT A POINT 1056.36 FEET WEST FROM THE NE CORNER OF SAID SECTION 1, T2N,R1W; THENCE S00°40'54"E, 1050.00 FEET; THENCE N89°27'07"W, 18.87 FEET; THENCE N00°38'00"W, 1049.82 FEET TO THE COMMON LINE BETWEEN SAID SECTIONS; THENCE EAST ALONG SAID LINE, 17.98 FEET TO THE POINT OF BEGINNING.

QUIT CLAIM PARCEL "B" (TO PROPERTY OWNERS TO THE SOUTH):

COMMENCING AT THE NE CORNER OF SECTION 1, T2N,R1W, VEVAY TOWNSHIP, INGHAM COUNTY, MICHIGAN; THENCE 1056.36 FEET WEST ALONG THE LINE COMMON TO SECTION 1, T2N,R1W, AND SECTION 36, T3N,R1W; THENCE 1050.00 FEET S00°40'54"E; THENCE 18.87 FEET N89°27'07"W TO THE POINT OF BEGINNING OF THIS PARCEL; THENCE S00°38'00"E, 8.28 FEET; THENCE N89°29'56"W, 262.62 FEET; THENCE N00°42'45"W, 8.49 FEET; THENCE S89°27'07"E, 262.63 FEET TO THE POINT OF BEGINNING.

QUIT CLAIM PARCEL "C" (TO PROPERTY OWNERS TO THE WEST):

BEGINNING ON THE LINE COMMON TO SECTION 1, T2N,R1W, VEVAY TOWNSHIP AND SECTION 36, T3N,R1W, ALAIEDON TOWNSHIP, INGHAM COUNTY, MICHIGAN AT A POINT 1338.38 FEET WEST FROM THE NE CORNER OF SAID SECTION 1, T2N,R1W; THENCE S00°42'45"E, 1055.82 FEET; THENCE N89°29'56"W, 19.38 FEET; THENCE N00°38'00"W, 1055.63 FEET TO THE COMMON LINE BETWEEN SAID SECTIONS; THENCE EAST ALONG SAID LINE, 17.92 FEET TO THE POINT OF BEGINNING.

N $\frac{1}{4}$ CORNER, SECTION 1, T2N,R1W

FOUND 4" x 36" CONCRETE MON. WITH $\frac{1}{2}$ " x 33" REROD

FOUND N & T, #18998, SOUTH SIDE 14" WALNUT, ENE, 131.97'

N & T, #18998, NORTH SIDE 36" CATALPA, EAST, 184.11'

TOP NORTHWEST CORNER, BOTTOM STOP OF HOUSE, #767 HOWELL ROAD, WSW, 196.62'

$\frac{1}{2}$ " BAR, L-13 ALAIEDON TWP., T3N,R1W, AS RECORDED L.2, P.451 (PA 74), EAST, 26.53

S $\frac{1}{4}$ CORNER, SECTION 36, T3N,R1W, FOUND $\frac{1}{2}$ " BAR

N & T IN EAST SIDE FENCE CORNER POST, NORTH, 29.90'

N & T SOUTH SIDE 18" WALNUT, ENE, 105.62'

$\frac{1}{2}$ " BAR IN MON BOX, WEST 26.53'

SE CORNER, SECTION 36, T3N,R1W FOUND 4" x 36" CONC MON WITH $\frac{1}{2}$ " x 38" REROD

N & T, #18998, EAST SIDE 36" COTTONWOOD, NNW, 44.74'

N & T, #18998, EAST SIDE 8" ELM, NNW, 40.45'

N & T, #18998, EAST SIDE 8" ASH, SOUTH, 54.03'

N & T, #18998, WEST SIDE 6" TWIN ASH, NORTH, 40.22'

M-1

We hereby certify that we have surveyed the property herein described, and that there are no visible encroachments upon the above described property, except as shown hereon.

We further certify that we have fully complied with the requirements of Section 3, Public Act 132 of 1970, and that the ratio of error of closure of this survey is no greater than 1/5000.

LEGEND

○ Set Iron


● Found Iron

— Fence Line

R Recorded Distance

M Measured Distance

D Deeded Distance



Ron Helsel
RON HELSEL, R.L.S. No. 18994

ACCOLADE, INC.

Land Surveying and Planning Specialists

807 Kerns Rd., Suite 101, Mason, Mich. 48854
Phone 517-676-1580

FOR: Eugene & Rebecca Henry
605 W. Howell Rd.
Mason, Mich. 48854

FIELD R.H./G.K.

DATE 2/21/91

DRAWN M.L.M.

SURVEY NO. 91 1580 B


CHECKED R.H.

SHEET 2 OF 2

JOB Section 1. Uvaay Twp
SHEET NO. _____ OF _____
CALCULATED BY ME DATE 11/9/80
CHECKED BY _____ DATE _____
SCALE _____



9/26/78

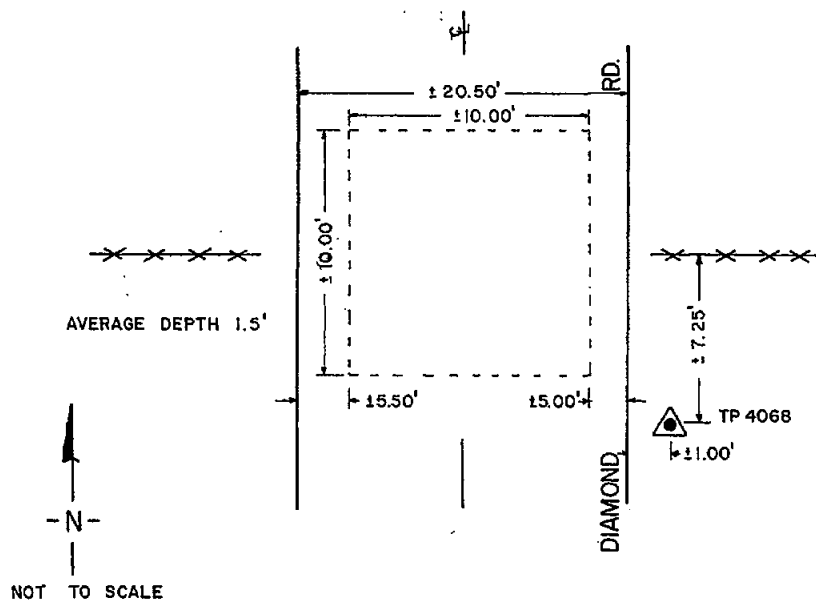


Excavation was done at a point 7.25' N. of TP 4068 on line w/ fence lines E. and W. , and on $\angle$ of Diamond Rd.

- 1) Found (I.C.R.P) N&T N. side of 8" multiple wild cherry S. 45° W. 41.80'
- 2) $\angle$ conc. fence corner post W. 33.14'
- 3) Found (I.C.R.P) N&T S.E. side 3" maple N. 30° E. 39.21'

FOUND NO EVIDENCE

L.B. Lost corner, no topsoil, need site verified by ~~post~~ ^{Post}.

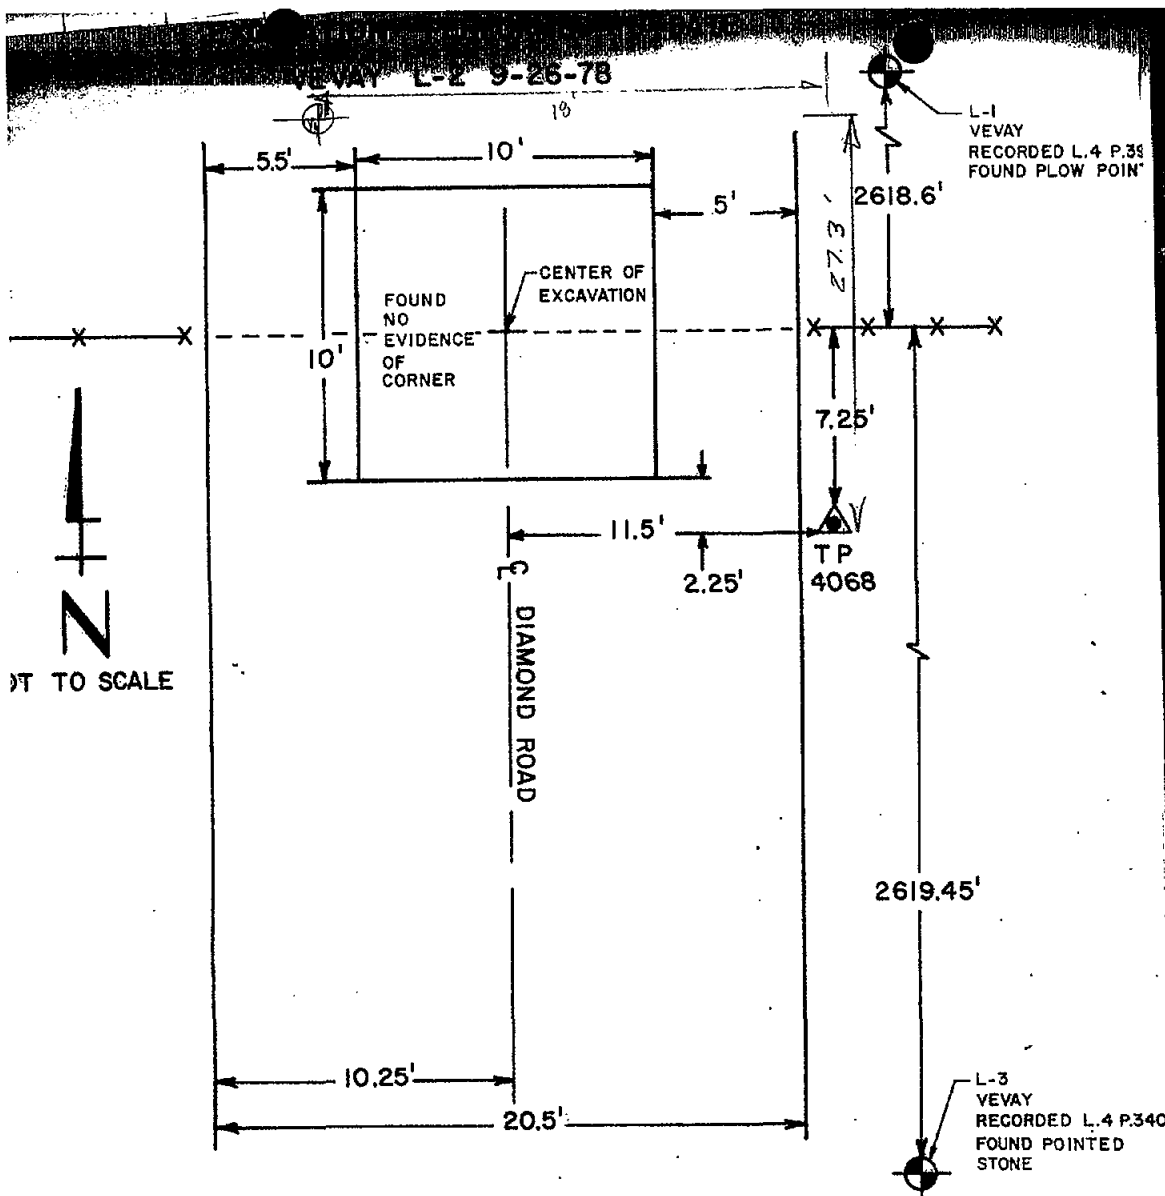

NOTES:

1. NO CROSS SECTION AVAILABLE. EXCAVATION REACHED AN AVERAGE DEPTH OF 1.5'. ROAD SURFACE WAS ASPHALT.
2. FOUND NO EVIDENCE OF CORNER.
3. FOUND THE FOLLOWING WITNESSES:
Found I.C.R.P. Nail & Tag, north side 8" Multiple Wild Cherry, SW, 41.80'
Found I.C.R.P. Nail & Tag, southeast side 3" Maple, NE, 39.21'
Centerline Concrete Fence Corner Post, West, 33.14'
4. LOST CORNER, NO TOPSOIL, NEED SITE VERIFIED BY DISTANCE. L.B.

Set corner per intervals given below
corner at intersection of N-S & E-W 1/4 lines

4068 → 104 358-14-30 702.73'
4068 → L-3 180-27-10 2611.73'
4068 → L-2 326-34-44 32.66


set 1/2" bar here & witness
Excavate 5'x5' around
location to look for monument
if none is found set monument
at location of 1/2" bar
R.L. 11/4/80

CORNER EXCAVATION REPORT

ECH. SUP'R. R. LESTER TOWNSHIP VEVAY
 COMPANY POLARIS CORNER CODE L-2
 FIELD SQUAD PLATT PAGE 1 OF 1 DATE 5-

EXCAVATED AREA: 5'x6' 20 SQ. FT.; AVG. DEPTH 3.0 SURFACE ASP

Sketch and describe roads, monuments found or set, and witnesses established:

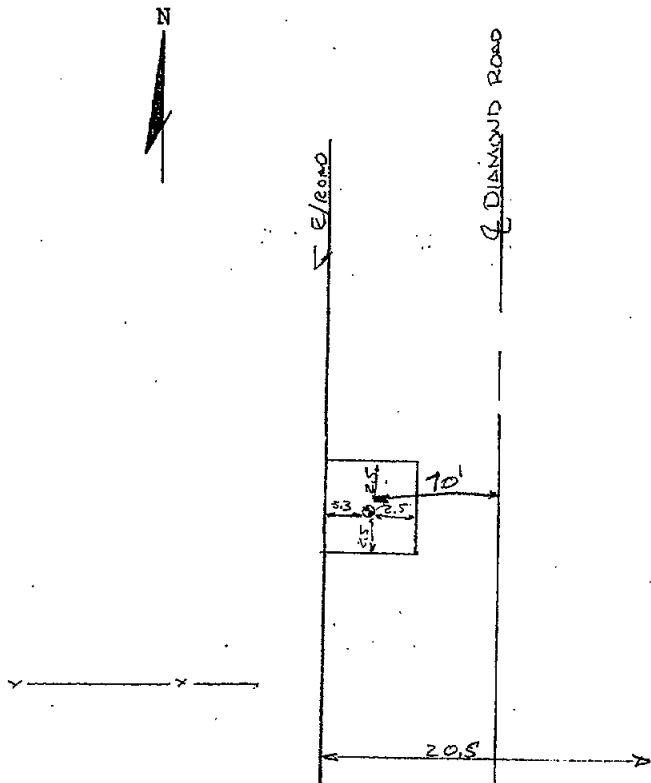

EXCAVATED 5'x6' AROUND
 1/2" BAR & CAP, FOUND NO EVIDENCE
 SET MONUMENT, CORNER LID AT
 LOCATION OF WITNESSED 1/2" BAR.

ASPHALT	0.2'
GRAN	1.0'
SANDY CLAY	1.8'

3-20-78; Fld. Form L.

4. LOST CORNER, NO TOPSOIL, NEED SITE VERIFIED BY DISTANCE. L.B.

Set corner per inversed. given below
 corner at intersection of N-S & E-W 1/4 lines

4068 → 104 358-14-30 702.73'
 4068 → L-3 180-27-10 2611.73'
 4068 → L-2 326-34-44 32.66

set 1/2" bar here & witness
 Excavate 5'x5' around
 location to look for monument
 if none is found set monument
 at location of 1/2" bar
 RL 11/4/80

L-2 VEVAY

- A) NO POST SET IN ORIGINAL GOV'T SURVEY.
NO RECORD OF SUBSEQUENT RESTORATION FOUND IN THE
PUBLIC RECORD.

- B) EXCAVATED A HOLE 10'X10' TO AN AVERAGE DEPTH OF
1.5' ON THE CENTERLINE OF DIAMOND RD AND ON FENCE
LINE EAST & WEST. EXCAVATION REVEALED NO PHYSICAL EVIDENCE
OF MONUMENTATION. EXCAVATED A SECOND HOLE 5'X5' AROUND
A POINT 20' NORTH OF EAST-WEST FENCE & 7' WEST OF CENTER
LINE ROAD. EXCAVATION REVEALED NO PHYSICAL EVIDENCE
OF MONUMENTATION. CORNER CONSIDERED TO BE LOST &
RE-ESTABLISHED AT THE INTERSECTION OF THE EAST-WEST
AND NORTH-SOUTH QUARTER LINES. LOCATION OF CORNER FALLS
± 20' NORTH OF EAST-WEST FENCE & 7' WEST OF CENTERLINE DIAMOND RD.
EXCAVATION CONDUCTED BY INGHAM COUNTY SURVEY AND
REMONUMENTATION PROJECT CREW.

C) L-2

CENTER OF SECTION 1 T2N R1W

SET 4"X 36" CONCRETE MONUMENT WITH 1/2" X 38" REBAR
AND CAP #18998^{IN MONUMENT BOX} IN LOCATION OF CORNER DESCRIBED
ABOVE:

NAIL & TAG #18998 IN NORTH SIDE TWIG 6" POPLAR S80°E^{71.6}

NAIL & TAG #18998 IN WEST SIDE 4" ELM S15°E 91.26'

NAIL & TAG #18998 IN EAST SIDE CLUMP WILD CHERRY 6" S20°W^{58.28}

NAIL & TAG #18998 IN SOUTH SIDE 4" ELM S80°W 50.10'