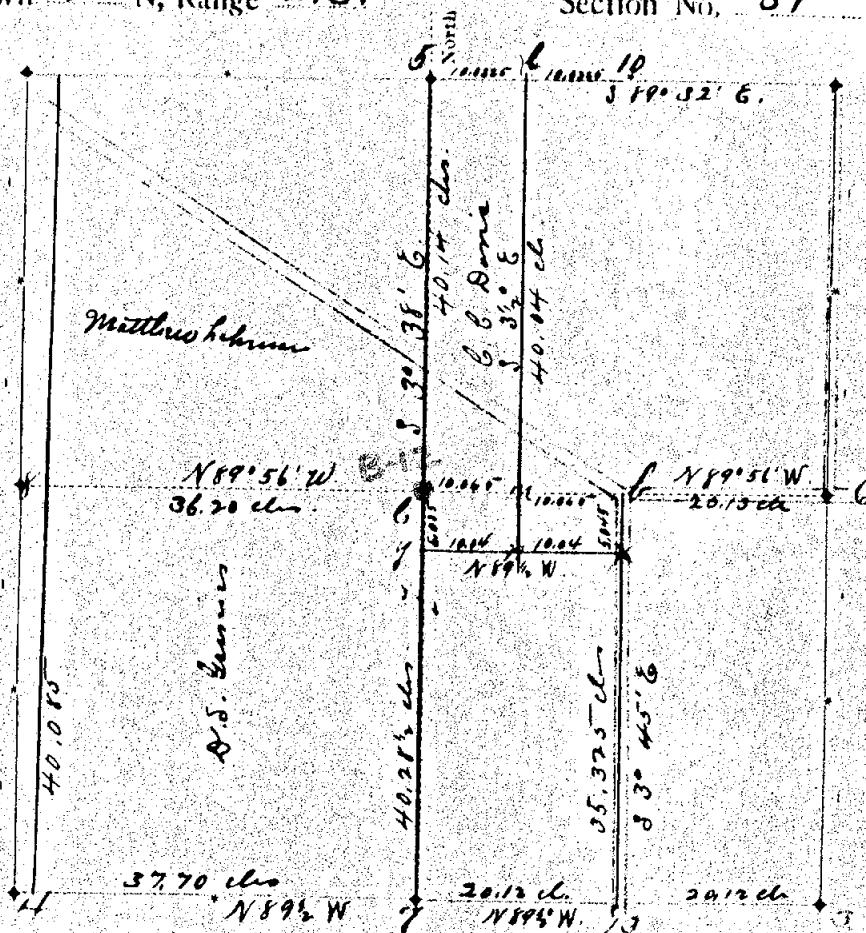


Town 2 N, Range 2 E.

Section No. 31

	Sect'n	Timber.	Diam	Bearing	Links		Sect'n	Timber.	Diam	Bearing.	Links
B-12	1	Log Point B. Oak	15	S 63° W	161	1	Steel corner near B. Oak	16	N 65° W	23½	
	"	W. Oak	40	N 51° W	6		Hedge	16	S 63° E	44½	
	"	W. Oak	4	N 77° N.	26½						
	4	Grove B. Oak	8	S 89° E	159	L	Apple	3	S 10° E	16	
	"	Alder do	20	N 15° E	32		do	6	S 55° W	60	
	"	Cedar	10	N 30° E	46		one B. Oak	8	S 26° W	40	
	"	W. Sug. Oak	15	S 46° W	48	m	W. Oak	18	N 78° E	40½	
	Upr.	Acad. S.W. cor of School House	3	S 65° E	114½		iron nail closed sign				
	6	S.E. cor of Apple's Hom	N-W	201		f	B. Oak	32	S 71° E	312	
	7	Steel broken shaft.				"	break Apple	10	S 82° W	91½	
	"	W. Oak	7	N 54° W	228½		B. Oak	24	S 43° E	403	
	"	Red Oak	12	N 89° W	150		steel shaft 14x18	8	N 86½° W	20	
	8	Park with stone & sh. l. S. & G.	40	40		J	DRM B. Oak	8	N 1° W	98	
	"	Cedar	10	S 80° W	45½	"	B. Oak	24	N 4° W	227	
	"	Do	8	N 74° E	53½	X	Cedar	16			
	10	Stone &	12	N 85° W	54	y	Iron rod 1' x 3'				for corner
	"	Cedar	12	N 85° W	54						
	"	Do	8	S 5° E	100						


Run by the true meridian. Magnetic variation 0 degrees 10 minutes E.

Surveyed the 12th day of June 1800 by

E. A. Watkins
Dy · County Surveyor of Ingham County, Michigan.

Dy • County Surveyor of Ingham County, Michigan.

54

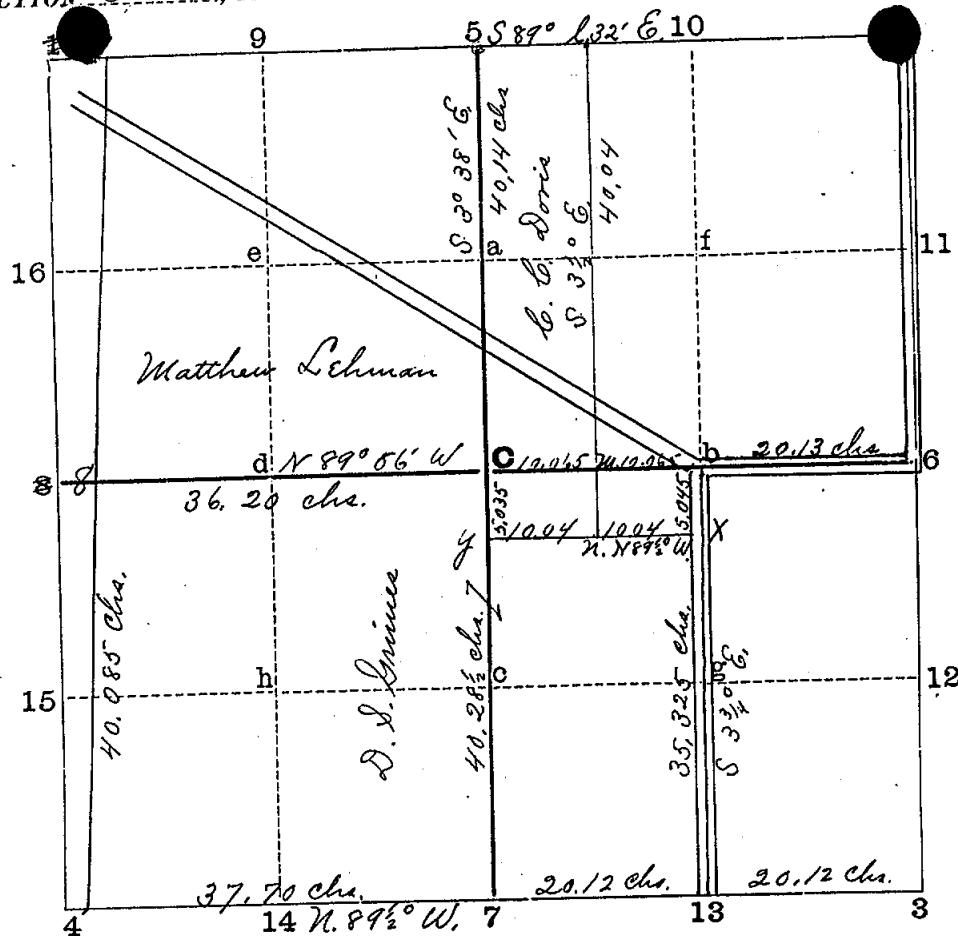

C Iron post f.w. bears cherry 15- S 63 $\frac{1}{2}$ ° W - 168 lbs.
B Oak. 8- S 79 $\frac{1}{2}$ ° W 150 lbs.

1
2
3 Stake f.w. bears. W. Oak. 40, N. 51° W. - 6 lbs.
W Oak. 4, N. 79° W - 26½ lbs.
4 Stone f.w. bears. B Oak 8 S 89½° E. - 49 lbs.
Dbl Do. 20 N. 15° E. - 32 lbs.
5 Post of Oak. f.w. bears. Elm. 10 N. 3° E. - 46 lbs.
Iron to be set W. Swamp Oak. 15, S 46° W - 48 lbs.
6 Stone + Bricks. f.w. bears. S.W. corner of school house S 55¾° E. 114½ lbs.
S.E. corner of Doggett Monument N.-W 200¾ lbs.
7 Set steel mower shaft for corner f.w. bears. W. Oak. 7 N 54° W - 228½ lbs.
3 ft long 1½" dia Red Oak. 12, N 87° W. 150 lbs.
8 Set Oak post with stone f.w. bears. Elm. 10 S 83¾° W. - 45¼ lbs.
¾" limber South of Lingham post Do. 8 N. 74° E - 33½ lbs.
9
10 Stone f.w. bears. Elm 12 N. 85° W. 54 lbs.
Do 8 S 50° E. 100 lbs.
11
12
13 Set steel mower brace f.w. bears. B. Oak 16, N. 65½° W. 23½ lbs.
Maple 16, S 83° E 49½ lbs.
14
15 l. post Iron to be set f.w. bears Hickory 3- S. 1° E. - 16 lbs
Do 6 S 85¾° W - 60 lbs
16

M. Set stake f.w. bears. Dbl. B Oak 8, S. 26° W - 40 lbs.
 W. Oak 18, N. 74° E. 40 1/2 lbs.
 Set Iron nail chisel 3/4" square f.w. bears B Oak 32, S 71 1/4° E. - 212 lbs
 16' long. and Crabapple 10, S 82° W. - 9 1/2 lbs.
 B Oak 24, S 7 1/2° E. - 403 lbs.
 X Set steel shaft 18' long 1 1/4" dia f.w. bears Dbl. B Oak 8, N 8 1/2° W - 20 lbs.
 B Oak 24 N. 11° N. - 98 lbs.
 n. Set Oak post f.w. bears Elm 16, N. 4° W. 227 lbs.
 y. Set Iron rod 1" dia 32' long. for corner, No trees
 l.

Magnetic Variation 10' East

STATE OF MICHIGAN,

COUNTY OF INGHAM,

ss.

Do Hereby Certify that I did, on the application of

E. A. Callkins, County Surveyor of said County,
 D. J. Grimes, Matthew Lehman and
 C. C. Davis

C


Section 31, in the Township of White Oak, Town 2 North, Range 2 E.
 on May 31st, 1st, 2nd, & 4th days of June A.D. 1900, and the following persons acted as chainmen, first being duly sworn, to-wit:

D. J. Grimes, Nathan Brimington, Matthew Lehman and C. C. Davis

And I Further Certify that I have compared the foregoing copy with the original minutes made by me at the time of the survey, and that it is a full and true copy of the minutes of such survey, which minutes give the magnetic variation at the initial point of the survey.

E. A. Callkins Deputy, County Surveyor.

SEC. 32

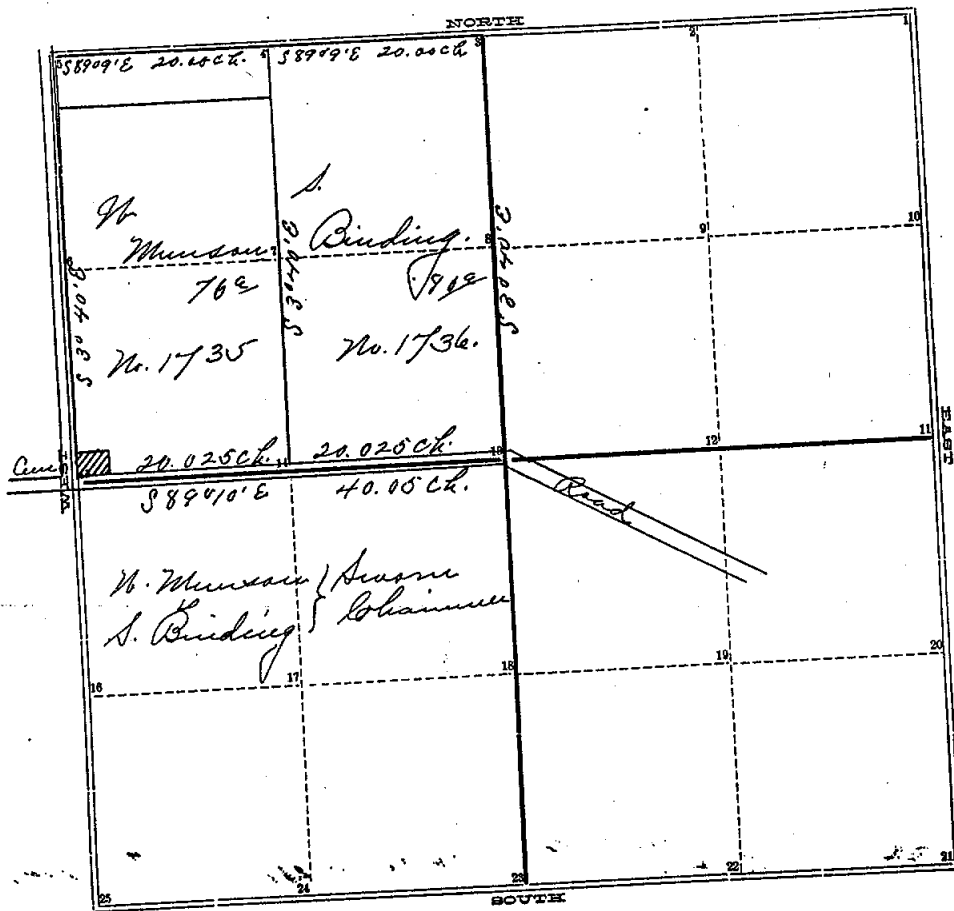

TOWN _____ NORTH, RANGE _____, MERIDIAN OF MICHIGAN.

- | | |
|----|----|
| 1 | 24 |
| 2 | 25 |
| 3 | |
| 4 | |
| 5 | |
| 6 | |
| 7 | |
| 8 | |
| 9 | |
| 10 | |
| 11 | |
| 12 | |
| 13 | |
| 14 | |
| 15 | |
| 16 | |
| 17 | |
| 18 | |
| 19 | |
| 20 | |
| 21 | |

A. 3

INGHAM COUNTY, MICHIGAN.



TOWN Two NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

Survey of the north west quarter of Section No Thirty two of Township No Two North of Range No Two East, as shown by the plat, the corner (5) was placed where it now is by Mr. Freeman of Washtenaw Co and whether it is the original corner or not I cannot say but it is not disputed. At (3) found the original corner but the quarter post (15) was gone and reestablished at the intersection of the quarter line from the known corner (2) through (13) (both made by Mr. Jackson see Liber 206) with the section line (5) (25). The corners as established and perpetuated are described below as follows.

(5) a stone	from which a W. & 10 in diam. bears	N 79 1/2 W	57 1/2
(4) " post	in Swamp		37.8
(3) " " 3x4 ins	No trees		
(2) " stone	a N. & 12 in.	"	N 16 1/2 E 98 "
(14) " " " "	" N. & 3 "	"	N 54 1/2 E 49 "
(15) " post (stone & brick)	S.W. cor of Sch. House	"	N 58 3/4 E 114 1/2 "
" " " " "	S.E. cor of Daggett Monument	"	N 20 3/4 W 150 1/2 "

Run by the true County Mer. Was allowed 1022' E
 Surveyed May 3^d 1881. Recorded July 9th 1881
 by
 A. P. Drake, Co. Surveyor.

Vol 3 pg 180

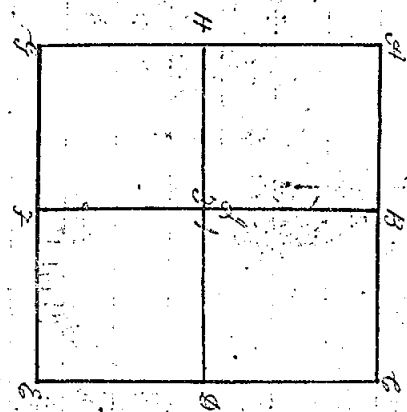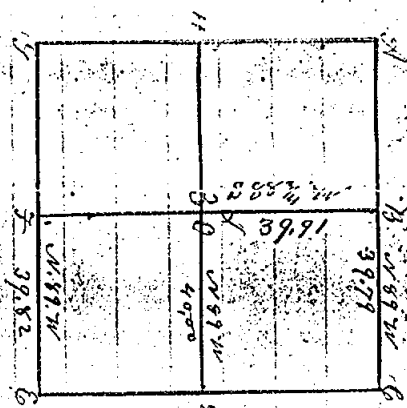

A. Z

B-6m 14.8 8 1/2 W 30 1/2 E 15 56 1/2 E 58 1/2
 C-6m 14 11 6 1/2 W 39 1/2 E 11 3 1/2 E 52
 D-6m 14 11 6 1/2 W 4 5 1/2 E 18 1/2
 E-110.8 W 78 1/2 W 57 1/2 E 6 1/2 W 13 1/2 E 37
 F-80.9 S 49 1/2 W 24 1/2 W 49 1/2 W 94

B-80.9 S 49 1/2 W 49 1/2 W 24 1/2 W 49 1/2 W 94
 C-110.8 W 78 1/2 W 57 1/2 E 6 1/2 W 13 1/2 E 37
 C-11

John Yokum Former Washfeman
 Co. Surveyor witnessed cover
 in 1878 and recorded them
 in his private notes (now
 in the possession of
 Melbourne Engineers)

D-110.24 11 37 1/2 W 63 1/2 E 45 76 E 18 1/2