SOURCE: Record of County Surveyor Vol. 3 P. 206 (1889)

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at Remonumentation Office

206

T 3 N R 2 E 6th P.M. Section 8

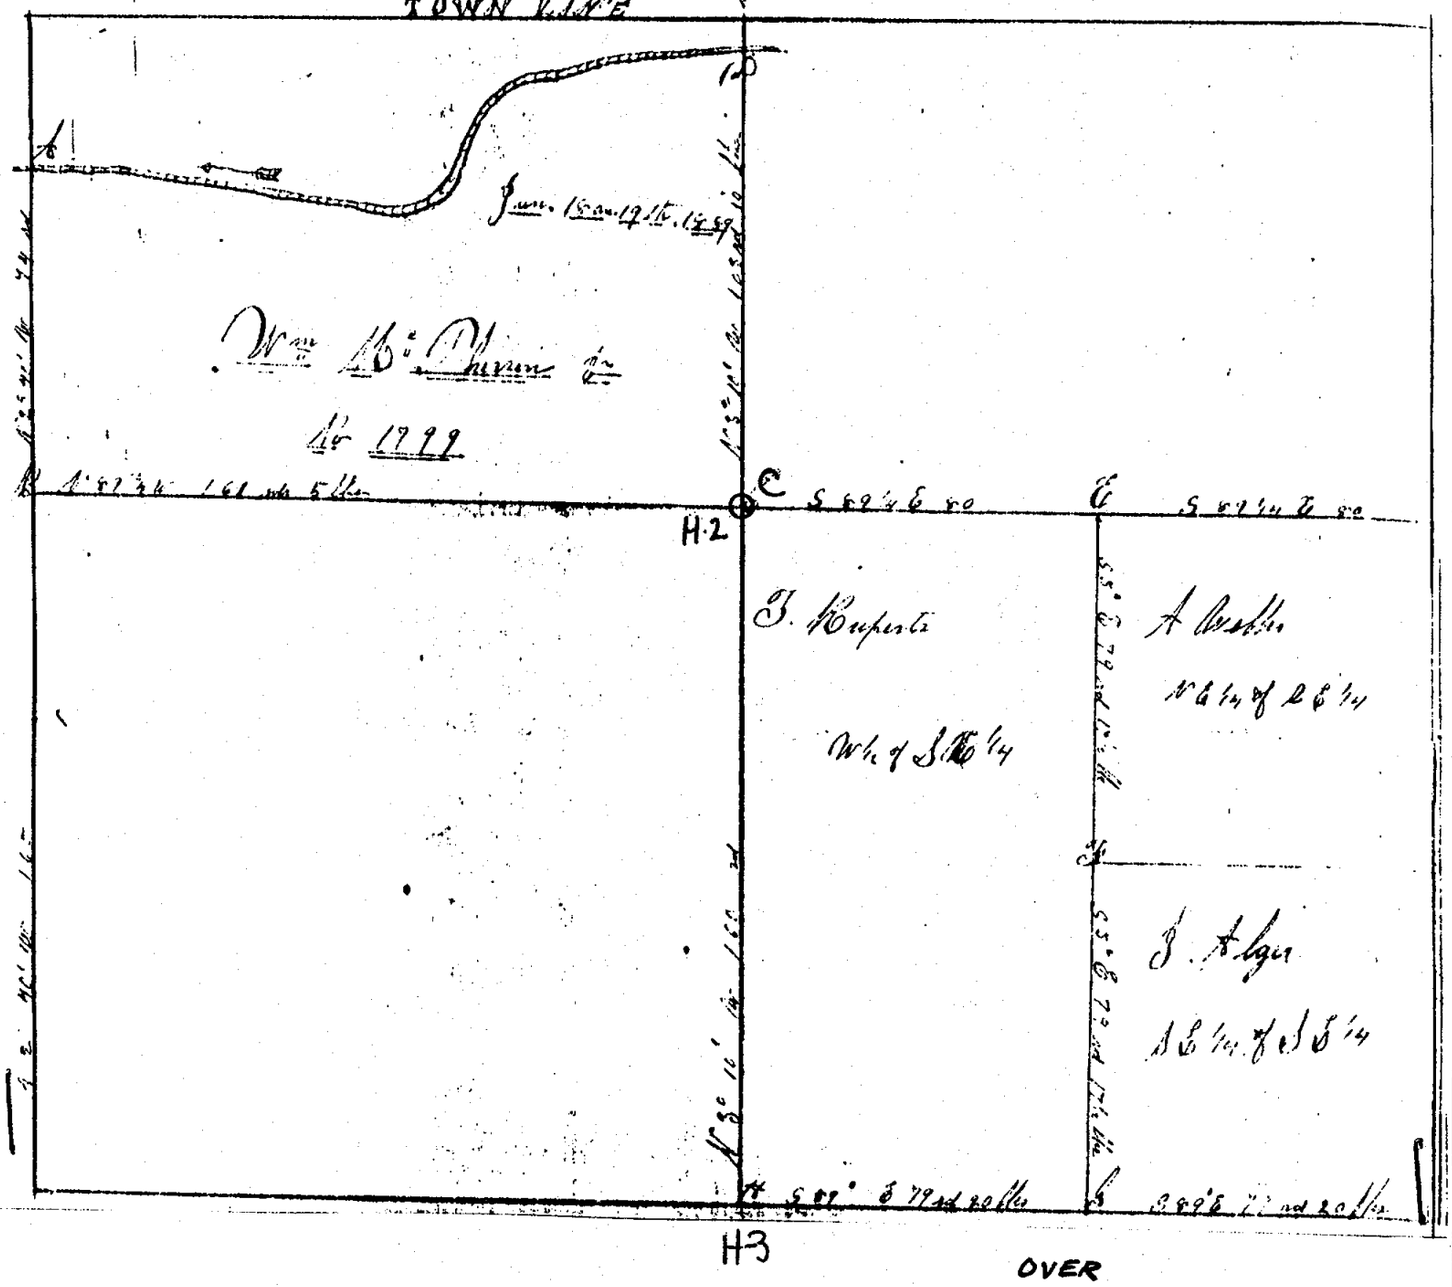

H3

OVER

LEROY township T 3 N, R 2 EW H-2 corner code 1 attachment no. p. 1 of 1

Station	Post	Witness Trees	Bearing	Dist	Station	Post	Witness Trees	Bearing	Dist
C	Brass cap Stake	16 Oaks 20 ins	S 46 E	29	B	Fence post corner stat and mon for			
" "	" "	" " 7 "	due E	38	A	Fence post corner stat and mon for			
B	Iron Post	No trees near							
C	Iron Post	Buck 6 ins	S 50 W	6					
" "	Stake	" " 6 "	N 53 W	52½					
D	Witness Tree	Ash 10 "	S 68 W	32					
" "	"	Red Elm 10 "	S 28 W	96½					
E	Stake	No trees near							
F	Post	" " "							

206

Survey of the N.W. fr'l ¼ of Section three of Township Number three North of Range Number two East, Lewis, the foregoing survey establishing the Boundary lines and corners of all that part and parcel of the said N.W. fr'l ¼ of sec. three lying South of the Cedar River I find the ¼ section post on West side of the section at station B. was retired and I established it by measurement and correction of the random line run from the sec corner of sections 9 + 10 and 3 + 4 and running N. 2° and 40' west 160 rds to ¼ section post and thence N 2° 40' west 74 rds to Cedar River where station A is established I then run the N and S ¼ section line N 3° and 10' west 160 rds to station C. and thence N 3° and 10' West to station D at cedar river and fore the line by intersecting the North Boundy line at ¼ section post I then corrected the E. and W. ¼ sec line from C. to B. 16 ½ and 6 lks and leaving them marked by stakes driven in and upon the corrected lines at every twenty rods distant, the magnetic Bar being estimated at 15' of one deg East and set off by the vernier of the compass Surveyed Jan 18th and 19th A.D. 1889.

C.B. Countiss

Recorded Jan 22 and 23 1889

Jay R. Fairbanks, Chainmen

John McCreary, County Surveyor

The corners E & F were located by measurement and division on November 7th 1889

The corners H & G was located by me in a survey made on the 12 day of August A.D. 1887 the corner H was identified by the A.B. Young tree and the old post found November 9th 1889

John McCreary, County Surveyor

G.L.O. MAPS

TRANSCRIBED from ORIG

H-3

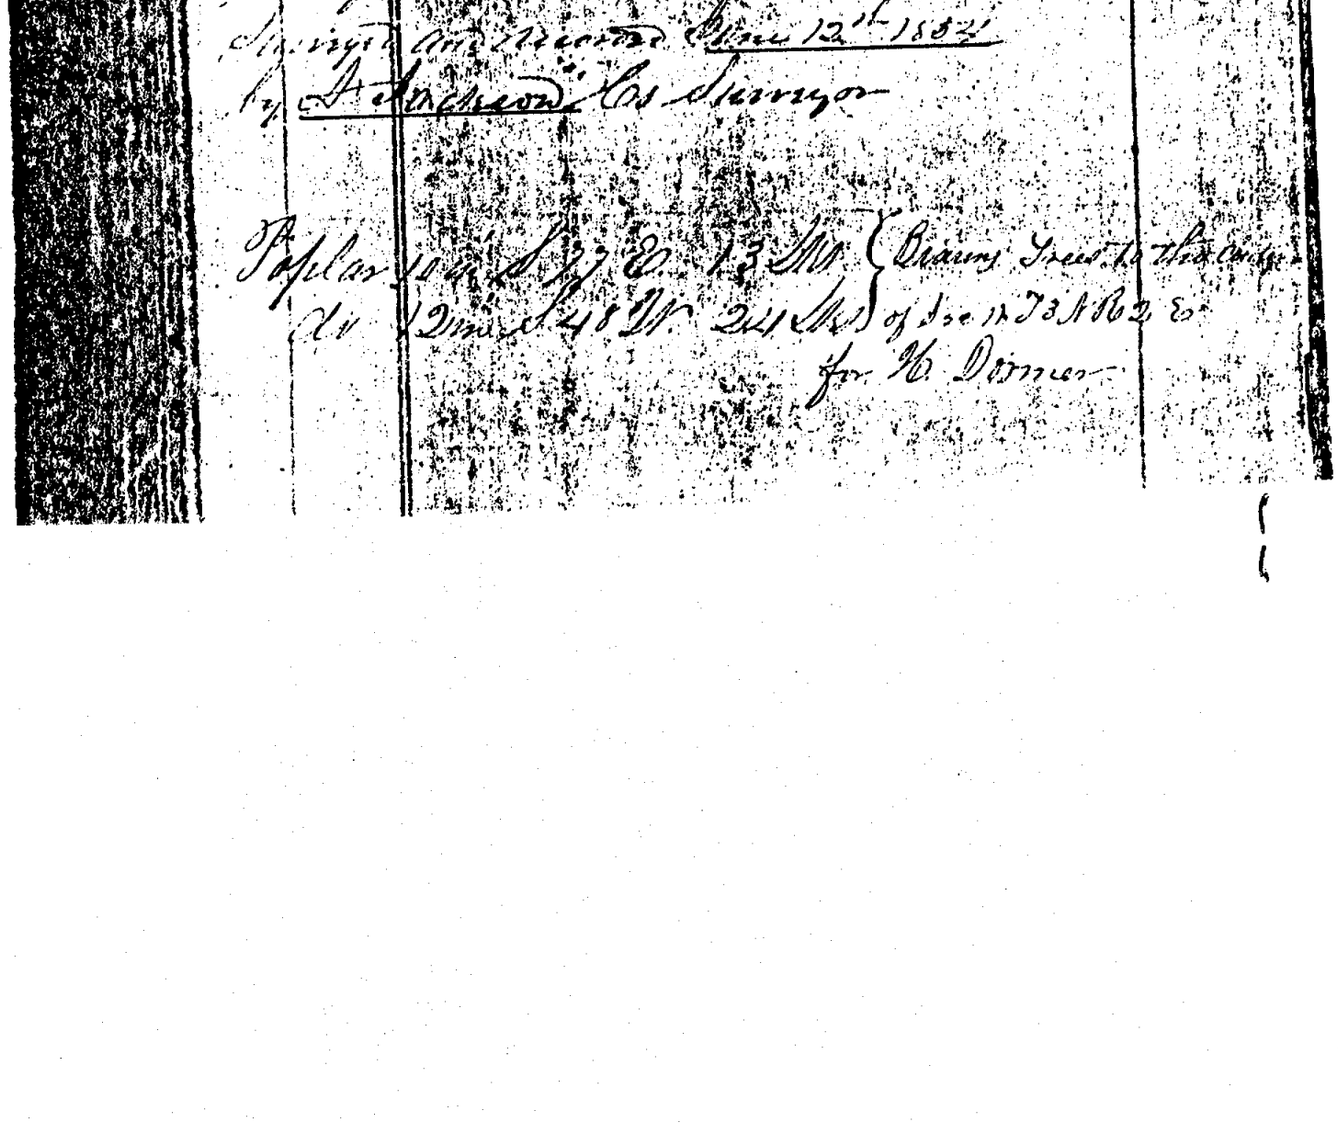

H-3

SOURCE: Record of County Surveyor Vol. 2 P. 204 (1854)

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at Remonumentation Office

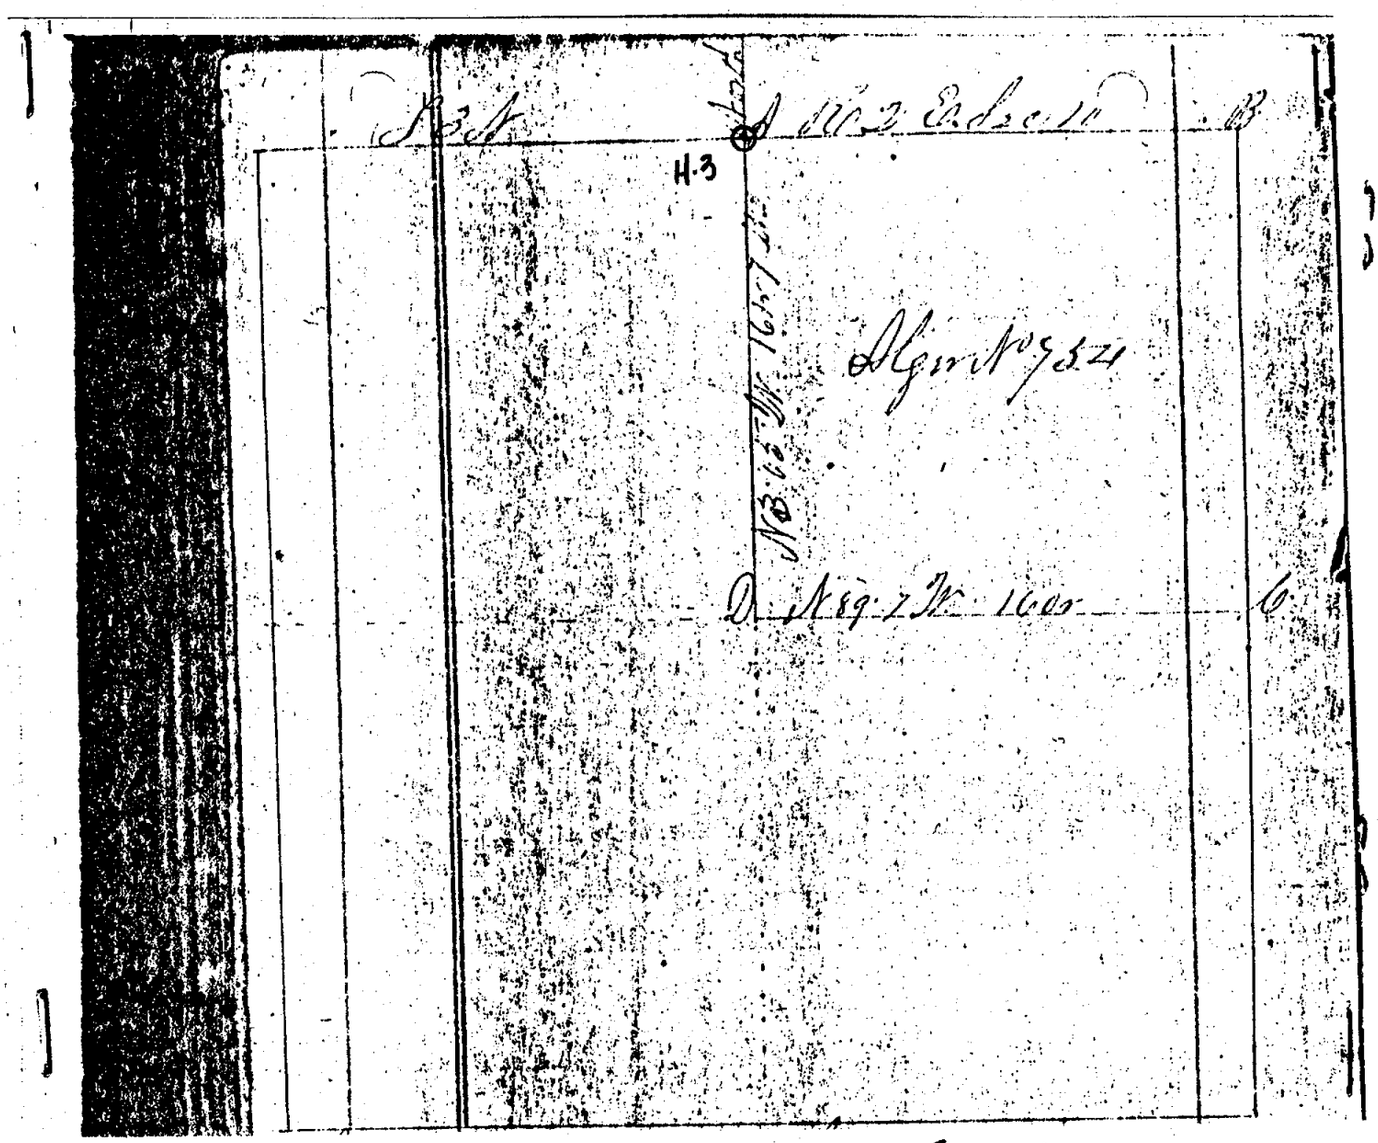

LEROY township T 3 N, R 2 EW H.3 corner code 1 attachment no. p. 1 of 1

SOURCE: Record of County Surveyor Vol. 3 p. 206 (1889)

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at Monumentation Office

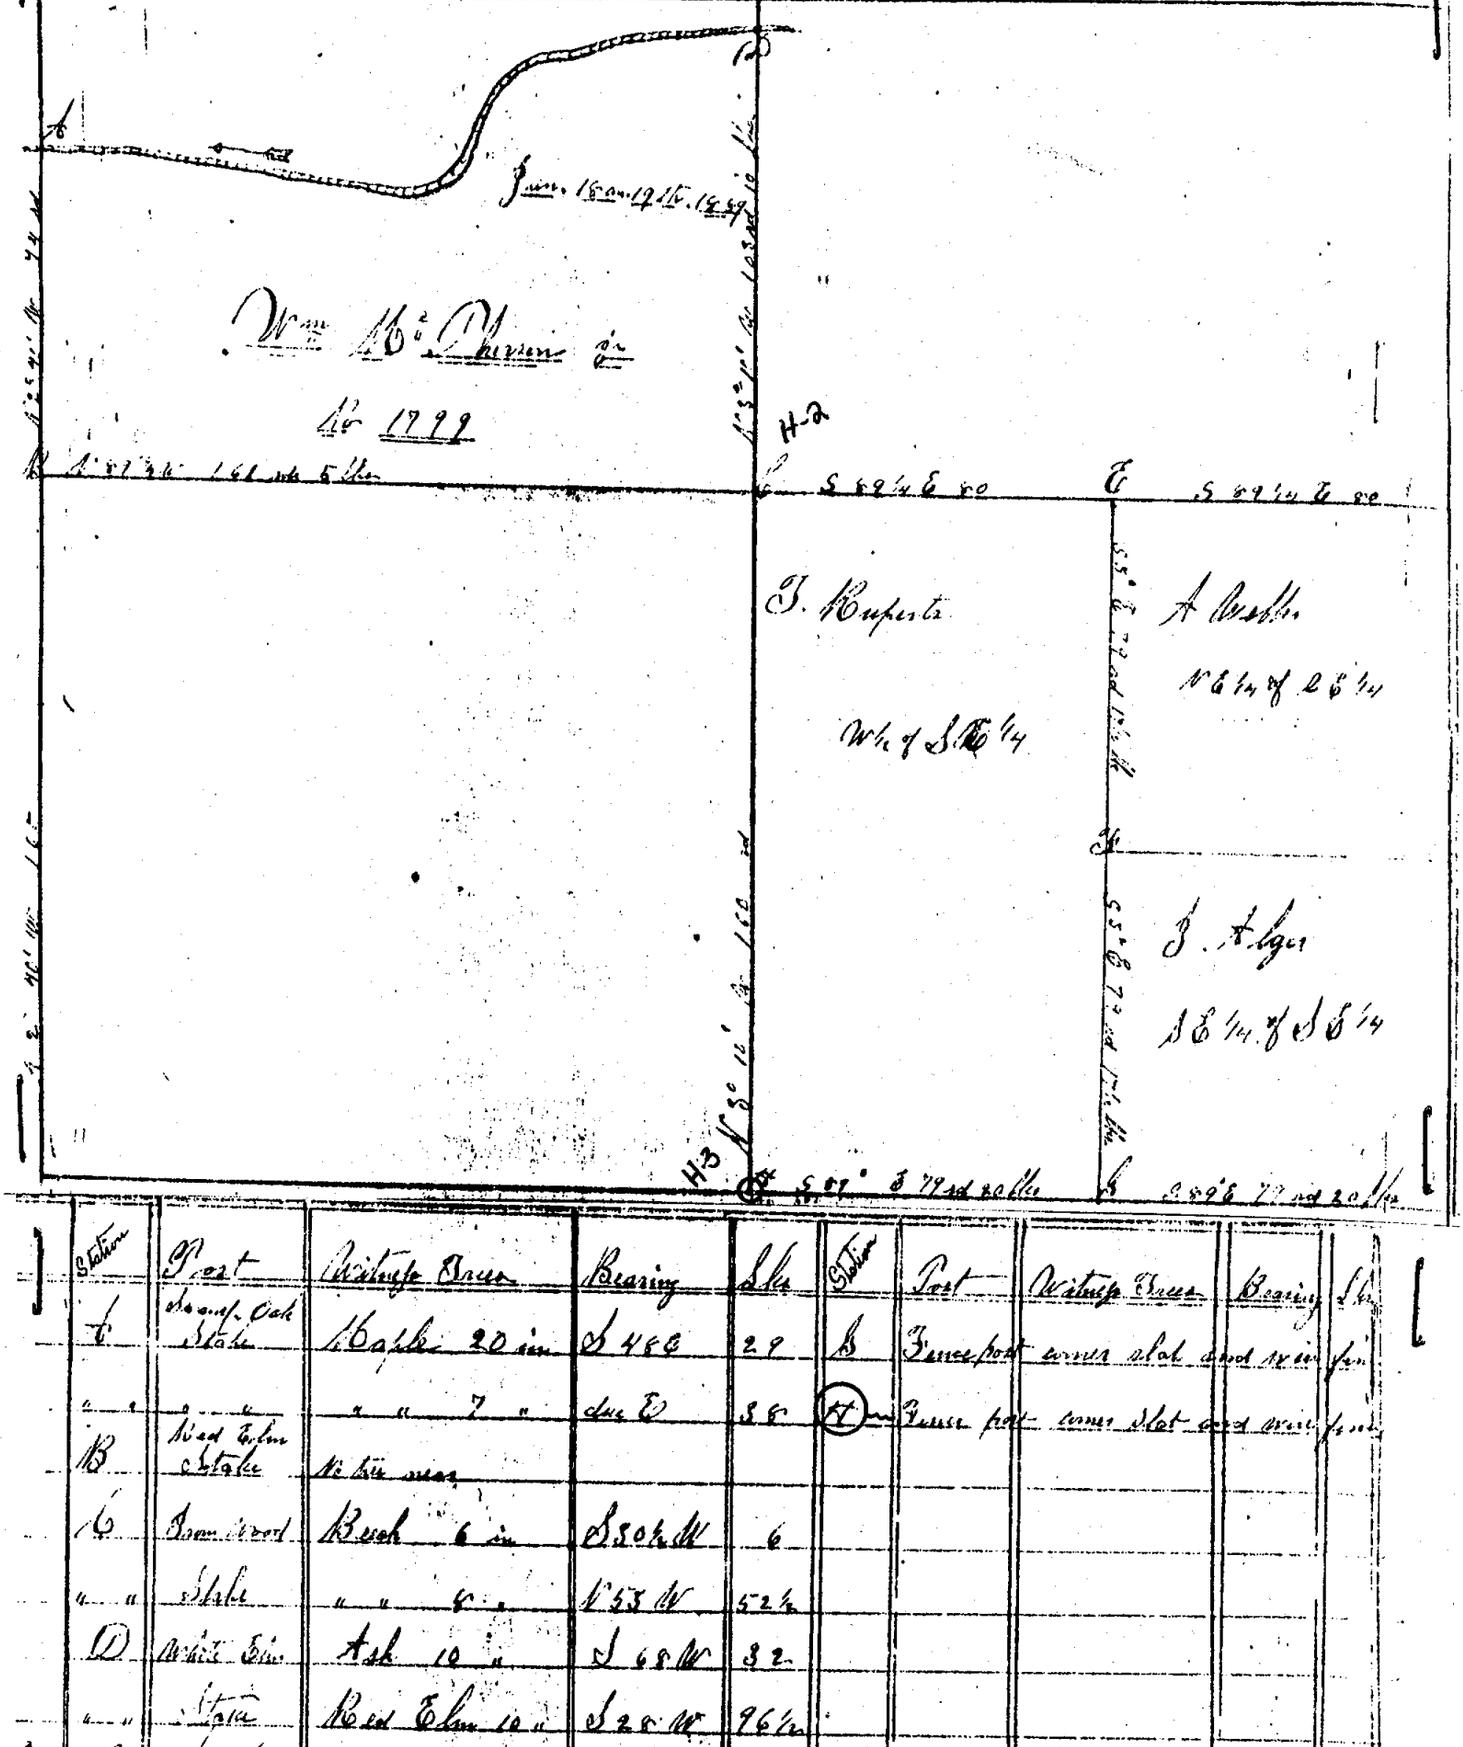

Station	Post	Witness Trees	Bearing	Lks	Station	Post	Witness Trees	Bearing	Lks
C	Mound, Oak Stake	Maple 20 in	S 46 E	29	B	Fence post	corner stake and mound		
" "	" "	" " 7 "	due E	38	H-2	Fence post	corner stake and mound		
B	Mound, Elm Stake	No tree mon							
6	Bearing tree	Beech 6 in	S 80½ W	6					
" "	Stake	" " 6 "	N 55 W	52½					
D	Mound, Elm	Ash 10 "	S 68 W	32					
" "	Stake	Red Elm 10 "	S 20 W	96½					
E	Stake	No tree mon							
71	Post	" "							

(over)

LEROY township T 3 N, R 2 E W H-3 corner code 2 attachment no. p. 1 of 1

Survey of the N.W. fr'l ¼ of Section three of Township Number three North of Range Number two East, Iowa, the foregoing survey establishing the Boundary lines and corners of all that part and parcel of the said N.W. fr'l ¼ of sec. three lying South of the Cedar River I find the ¼ section post on West side of the section at station B. was called and I established it by measurement and correction of the random line run from the sec. corner of sections 9, 10 and 3 & 4 and running N. 2° and 40' west 160 rds to ¼ section post and thence N. 2° 40' west 74 rds to Cedar River where station A is established I then run the N. and S. ¼ section line N. 3° and 10' west 160 rds to station C. and thence N. 3° and 10' West to station D. at cedar river and fore the line by intersecting the West Boundy line at ¼ section post I then corrected the E. and W. ¼ sec line from C. to B. 161 rds 6 lks and blazing them marked by stakes driven in and upon the corrected lines at every twenty rods distant the magnetic Bar being estimated at 15' of one deg East and set off by the vernier of the compass Surveyed Jan 18th and 19th A.D. 1889.

C.B. Courtright

Resurveyed Jan 22 and 23 1889

Jay C. Fairbanks, Chainmen

John McCreary, County Surveyor

The corners E & F was located by measurement and division on November 7th 1889

The corner H & B was located by me in the survey made on the 12 day of August A.D. 1887 the corner H was identified by the A.S. Creary bro. and the old post found December 9th 1889

John McCreary, County Surveyor

TOWN 4 North, RANGE 2 East

6	5	4	3	2	1
7	8	9	10	Page 10. 11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

I-1

TOWN 4 North, RANGE 1 East

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Doubleday Bros. & Co. Mfrs. Kalamazoo Mich. 11-08

TOWN 3 North, RANGE 1 East

I-1

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
Page 160 30	29	28	27	26	25
31	32	Page 23 33	34	35	36

TOWN 3 North, RANGE 2 East,

6	5	4	3	2	1
Page 165 " 166 7	8	9	10	11	12
18	17	16	15	Page 151 52 14	Page 151 13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	48 35	36

I-2

Le Roy

TOWN Three NORTH, RANGE Two East

6	5	4	3	69 2	1
7	8	9	Abdk 10	227 11	12
18	17	16	2 15	261 14	13
19	210 20	21	22	23	24
30	29	28	27	26	237 25
31	113 229 32	220 33	34	257 35	36

Locke

TOWN Four NORTH, RANGE Two East

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	40 14	19 13
19	26 229 20	42, 223, 21	41, 22	39, 180 23	44, 24
30	29	28	27	43, 182, 26	25
31	32	75, 125, 33	34	186 35	235 36

SOURCE: RECORD OF CO. SURVEYOR V. 3 P. 92

TRANSCRIBED from ORIGINAL / DUPLICATE on file at REMON. OFFICE

12

T. 3 N. R. 2 E.

Section 2.

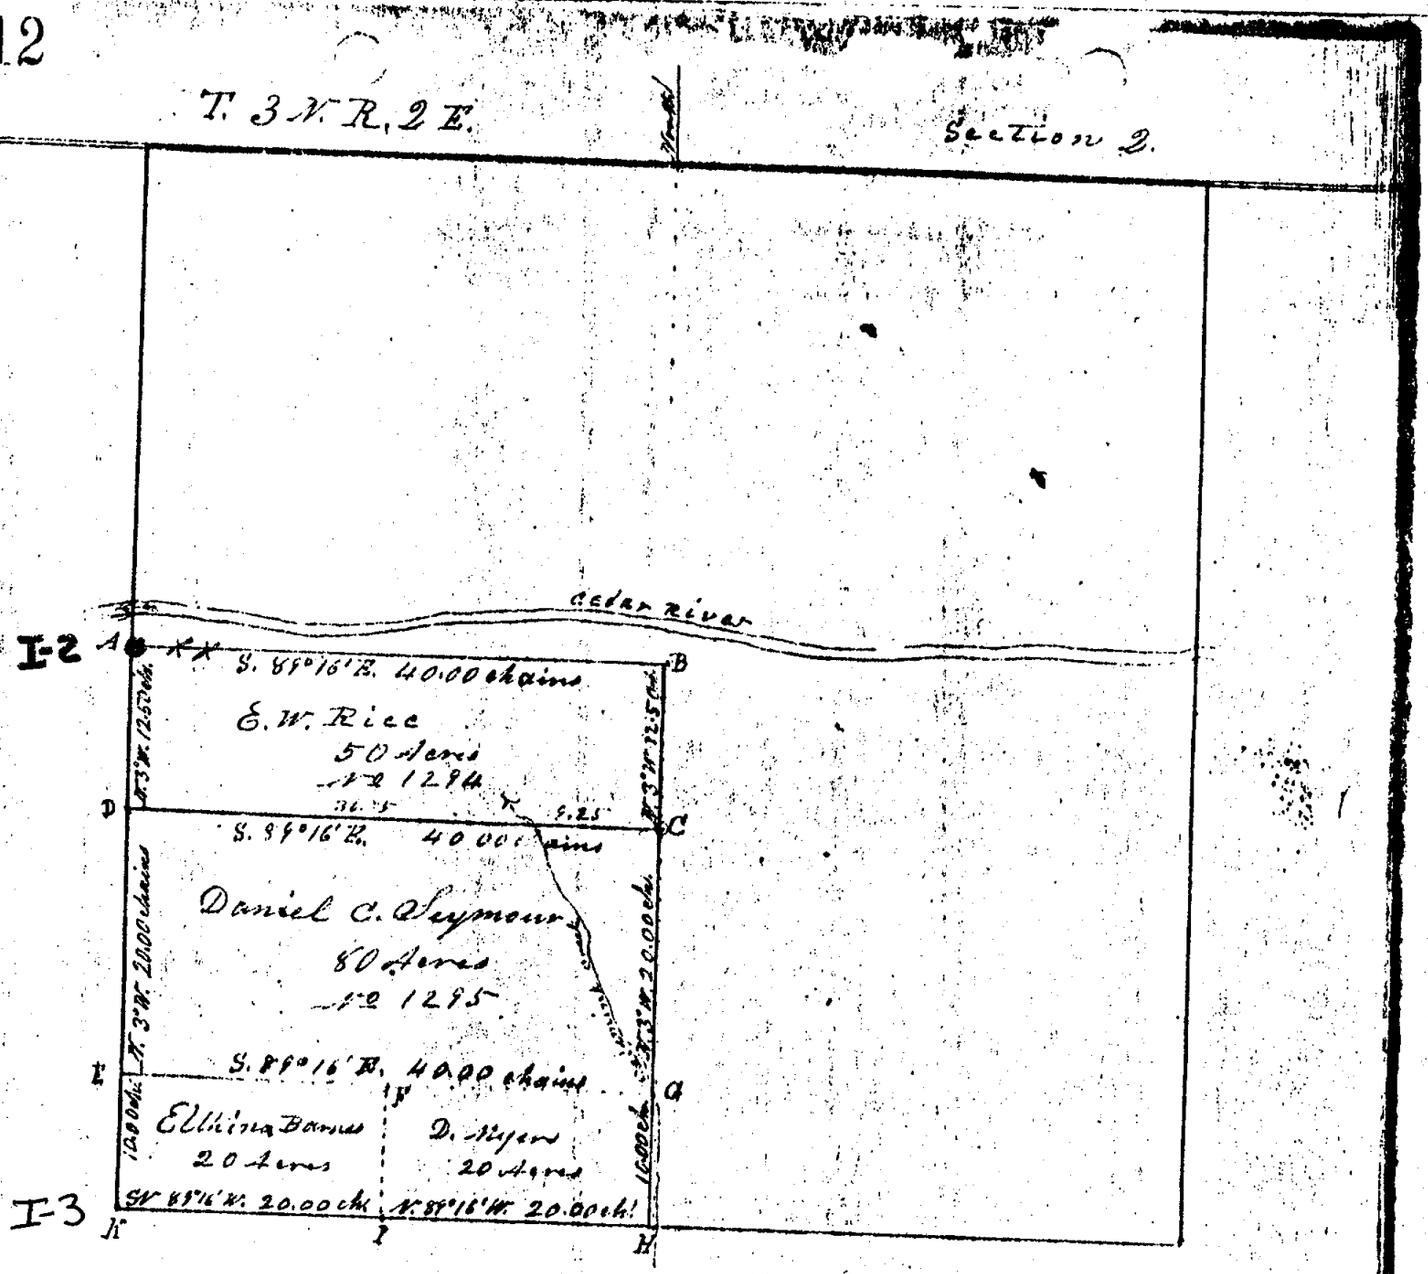

LEROY township T 3 N, R 2 EW I-2 corner code 1 attachment no. p. 1 of 2

SOURCE: RECORD OF CO. SURVEYOR V.3 P. 42

TRANSCRIBED from [illegible] DUPLICATE on file at REMON. OFFICE

42

Survey of the Southwest Quarter of Section N° Two in Township N° Three North of Range N° Two East. The corner K being lost and the witness Trees gone, (See the accompanying Plat) the nearest known corner South was the Quarter Post in the East line of Section Ten, and the nearest known corner North was the North west of the Section (Sec. 2) The station Trees on this line were also gone. Therefore ran a straight line between these two points which bears N. 3° 45' W 109.32 chains. The nearest known corners East & West were the Quarter Posts in the South line of Sections Two & Three; therefore ran the line between those two points which bears N. 88° 16' W intersecting the West line of the Section (2) at (K) a distance of 40.16 chains of (H) the Quarter Post in the South line of said Section (2). Thus the corner K was established. Thence beginning at (K) the Southwest corner of the Section, and running thence North three degrees West on the West line of the Section Ten chains to (E) a Post from which gave a Range S. 88° 16' E, to be traced through to C by those concerned; thence from E North three degrees West as before Twenty chains to (D) a Post; thence North three degrees West as before Twelve chains & fifty links to (A) a Post, also gave a Range from A, S. 88° 16' E. to be traced through to B, (being near the River was not Surveyed) Thence from D, South Eighty-nine degrees and Sixteen minutes East, forty chains to (C) a Post from which a White Oak ten inches diameter bears North fifty-seven degrees East eleven & one fifth links; thence North three degrees West Twelve chains & fifty links to (B) a Post (No Trees) thence from C South Three degrees East Twenty chains to (G) a Post in the Calamink Creek (No witness Trees), thence South Three degrees East as before Ten chains to (near H) a Post Sixteen links West of the Quarter Post in the South line of Section Two aforesaid; being the North East side of an Elm 3 trunks 24 inches diameter & No other Witness, thence North Eighty-nine degrees & Sixteen minutes West on the said South line, Forty chains to (K) the place of beginning Containing 170 Acres.

Run by the true Meridian Magnetic Variation 2¼° E.

Surveyed for E. M. Rice, Daniel E. Seymour, E. Barnes &c. Dec. 4th 1868 and Recorded Dec. 31st 1868 by J. M. Brown Dep. Co. Surv. Ing. Co. Mich.

LEROY township T 3 N, R 2 EW I-2 corner code 1 attachment no. p. 2 of 2

COUNTY SURVEYOR'S RECORD,

TOWN Three NORTH, RANGE Four East, MERIDIAN OF MICHIGAN.

SEC. 2

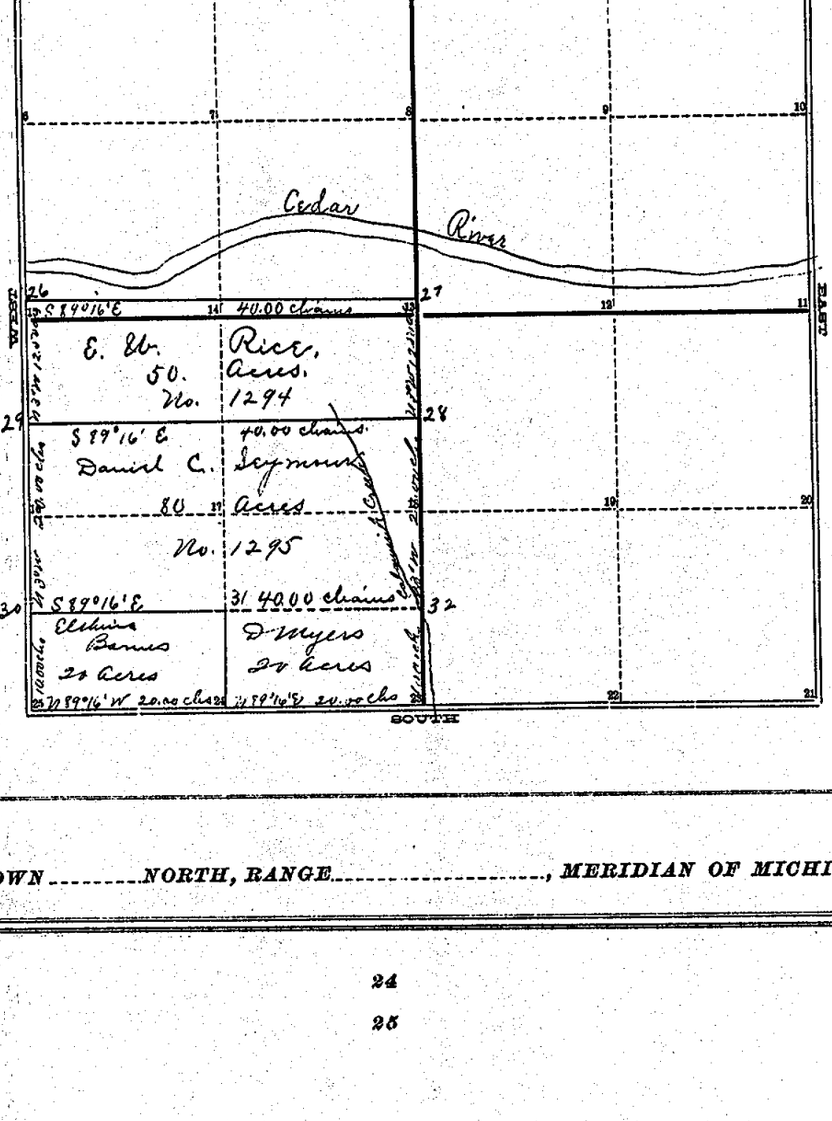

TOWN ..... NORTH, RANGE ....., MERIDIAN OF MICHIGAN.

1 24
2 25
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19

INGHAM COUNTY, MICHIGAN.

TOWN. Three NORTH, RANGE. Two East, MERIDIAN OF MICHIGAN.

Survey of the south west quarter of section No Two in Township No Three North of Range No Two East. The corner "25" being lost and the witness tree gone (See the accompanying plat) the nearest known corner south was the quarter post in the East line of section Two and the nearest known corner north was the north west corner of the section (See 2) the station trees on this line were all gone; Therefore ran a straight line between these two points which bears N 3 W 109.32 chains. The nearest known corners east and west were the quarters post in the south line of section Two and Three. Therefore run the line between the two points which bears N 89°16' W intersection the west line of the section (2) at (25) a distance of 40.16 chains to (23) the quarter post in the south line of said section (2) thence the corner (25) was established; Thence beginning at (25) at the south west corner of the section and running thence north three degrees west on the west line of the section Ten chains to (30) a post from which gave a range S 89°16' E to be traced through to (32) by those concerned; then from (30) North three degrees west as before Twenty chains to (29) a post; thence south three degrees west as before twelve chains and fifty links to (26) a post also gave a range from (26) S 89°16' E to be traced through to (27) (being near the river was not surveyed) Thence from (29) south eighty nine degrees and sixteen minutes east forty chains to (28) a post from which a White Oak 10 in diam bears North fifty seven degrees east 11 links thence north three degrees west fourteen chains and fifty links to (27) a post no trees. Thence from (28) south three degrees east twenty chains to (32) a post in the Calamink Creek. No witness trees; thence south three degrees east as before ten chains to (near 23) a post sixteen links west of the quarter post in the south line of said section (2) aforesaid, being the north side of an Elm stump 24 inches diameter and no other witnesses; thence north eighty nine degrees and sixteen minutes west on the said south line forty chains to (23) the place of beginning Containing 170 Acres

Run by the true Meridian Magnetic Variation 2¼° E

Surveyed for E. N. Rice Daniel C Seymour and E. Barnes & Co Dec 4th 1868 and Recorded 31st Dec. 31 1868, by

T. J. Brown, Dep. Co. Surv., Ing. Co., Mich.

COUNTY SURVEYOR'S RECORD,

TOWN 1 North, RANGE 1 East, MERIDIAN OF MICHIGAN.

SEC. 35

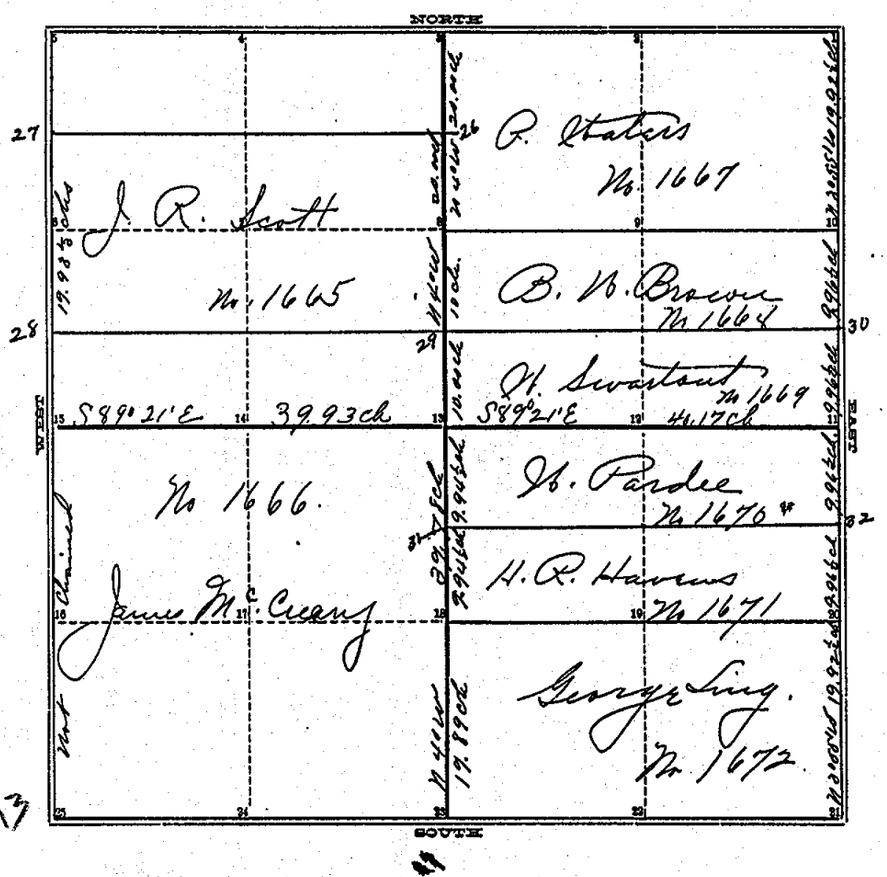

TOWN 1 North, RANGE 1 East, MERIDIAN OF MICHIGAN.

The corners are described as follows.

1 Stone C. Cherry 12 S 44½ W 28 2/2
Angle 8 S 59 E 68 3/4
2
3 post Sup. 4 40 N 47½ W 65½
" " " 4 S 44 E 44
4
5 Pine & R. R. Iron Elm 10 S 88 E 133
6
7
8 post R. Elm. 4 S 64 W 11
9
10 Stone W. O. 3 N 49 W 75
" Crab Apple 3 S 76 W 100 4
11 " B. O. 12 S 11 W 182½
" Sup. 8. 8 S 44¾ W 59
12 " Elm 10 N 36 E 21
" Sup O 4 S 89¾ W 59
13 " Elm 16 N 36 E 21
14
15 Stone Burr Oak 3 N 88½ E 106½
16
17 post Maple 4 S 12¾ E 12½
18 " " 6 S 81¼ E 39
19
20 Stone mc at corner
21 " set for corner
22
23 Stone W. O. 4 2 N 15¼ W 93½
" " " 2 S 76 E 55½
24
25 Stone B. Cherry 12 N 2 W 28 6/2
26 Iron Elm 4 S 5 E 69
" Bush 5 S 29¾ W 32½
27 Stone " 14 S 38¼ E 74¼
" " " 14 S 26½ E 154
28 " Witness 9 S 50 W 168½
29 post Elm 14 S 78 W 26 2/2
15 N 10 W 88 2/2
30 Stone mc at corner
31 post in swamp
32 Stone mc

TOWN. Four NORTH, RANGE. Two East, MERIDIAN OF MICHIGAN.

Survey of section No Thirty five in Township No Four North of Range No Two East as shown by the plat being divided as here represented (with letters) reference to the corners described below. The South east corner and the east quarter post was gone and reestablished by running the section line from the South east corner to the east quarter post of section (24) (See below Plat)

Run by the true Meridian Var allowed 10 22' E
Surveyed Nov. 18th & Dec 2nd 1879 by
A. D. Drake
Surv.

Recorded Dec. 12th 1879.

I-3

LeRoy

TOWN Three NORTH, RANGE Two E.

6	50 5	4	33 3	39 2	1
33 35 7	8	9	109 10	11	12
49 18	17	105 16	15	14	13
19	20	21	22	23	207 24
27 30	29	28	27	100 26	101 192 25
31	32	33	34	119 35	199 36

Locke

TOWN Four NORTH, RANGE Two E.

94 6	6 5	164 4	54 3	112 2	10 163 1
7	8	9	10	212 11	12
18	17	16	164 15	14	13
53 89 19	90 20	21	22	23	24
66 30	29	28	27	26	96 25
31	102 32	33	97 34	35	36

35

COUNTY SURVEYOR'S RECORD,

TOWN Three NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

Section Three

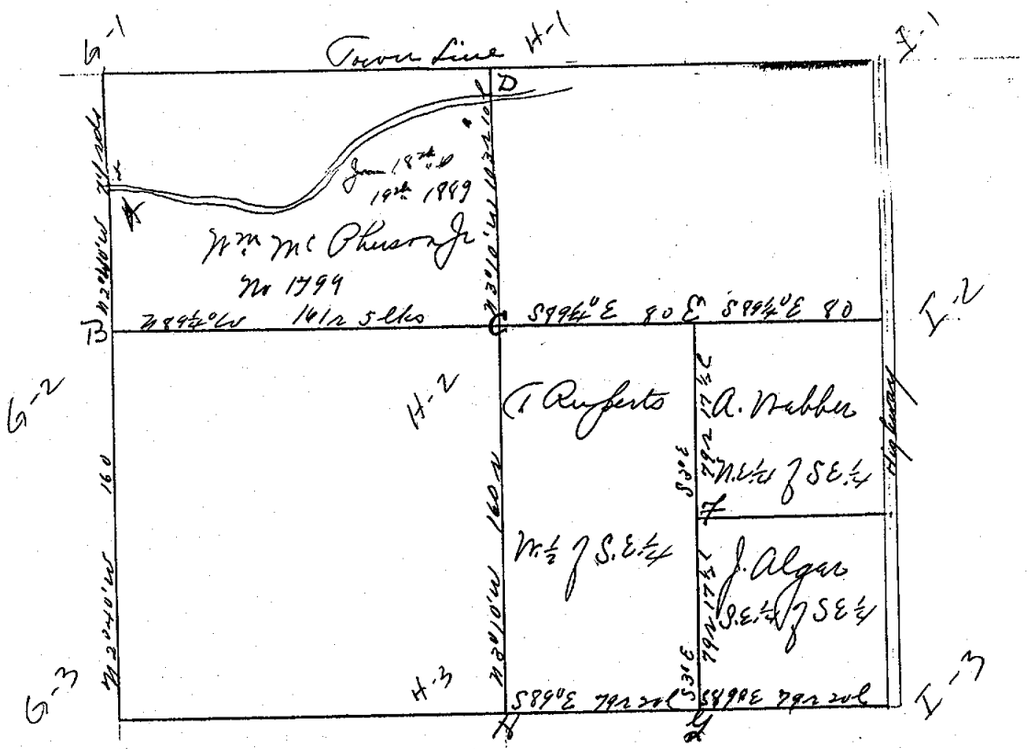

Page 216, Vol. 3.

TOWN ____ NORTH, RANGE ____, MERIDIAN OF MICHIGAN.

		Sup Oak Maple 20 in.	S 48 E	29 lks
	A ⊕ Stake	" 7 "	due E	38 " 24
G-2	B ⊕ Stake Red Elm		Notrees Near.	25
H-2	C ⊕ Stake Drowned Beech 6 "		S 30½ W	6 "
	" " 8 "		N 53 W	53½ "
	White Elm Stake 10 "		S 68 W	33 96½
	D ⊕ Stake R. Elm 10 "		S 29 W	
	E ⊕ Stake		No trees Near.	
	F ⊕ Post		" " "	
	G ⊕ Fence post Corner plat + wire fence			
H-3	H ⊕ " " " " " " "			
	9			
	10			
	11			
	12			
	13			
	14			
	15			
	16			
	17			
	18			
	19			

INGHAM COUNTY, MICHIGAN.

TOWN. Three NORTH, RANGE. Two East, MERIDIAN OF MICHIGAN.

Survey of the North west fractional ¼ Section three Township No Three North of Range Number two East, LeRoy, the foregoing survey establishing the Boundary lines and corners of all that part and parcell of the said N.W. fr. ¼ Sec three lying South of the Cedar River I find the N. W. ¼ Sec. post on west side of the section at Station A was extinct and I established it by measurement and correction of the random line run from the sec. corner of Sections 9 & 10, 3 and 4 and running N 2° 40' west 160 rds to ¼ section post and thence N 3° 40' west 74 rods to Cedar River where Station 4 is established. I then run the N & S ¼ section line N 3° and 10' west 160 rods to Station C and thence N 3° 10' W to Station D at Cedar River and from the line by subsecting the north boundary line at the ¼ section post. I then corrected the E & W section line from C to B 16 rd. 6 lks and leaving them marked by stakes driven in and upon the lines at every twenty rods distance The Magnetic Variation being estimated at 15 degrees East and set by the Vernier of this compass. Surveyed Jan 18th & 19th A.D. 1889.

C. B. Courtright } Sworn
Jay R. Fairbanks } Chainmen.

Recorded Jan 22nd 1889

John McCreary
County Surveyor.

The corners E & F were located by measurements and division on November 7th 1889

The corners H & G was located by me in A survey made on the 12th day of August A.D. 1887 the corner H. was identified by the U.S. Survey trees and the old post found Recorded November 9th 1889

#-3

John McCreary
County Surveyor

COUNTY SURVEYOR'S RECORD,

TOWN Three NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

Section Two

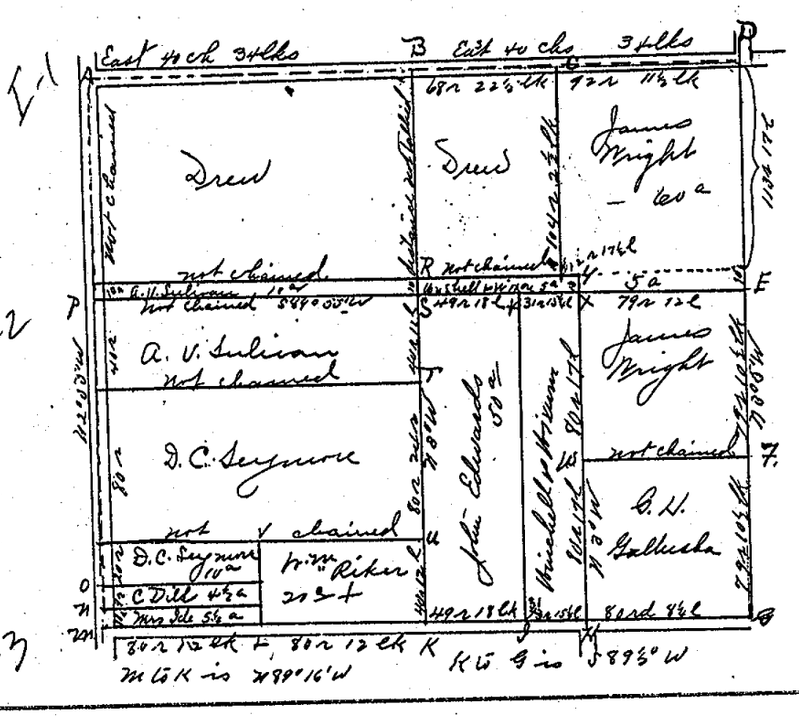

T. 1
T. 2
T. 3

Page 224, Vol 3

TOWN ..... NORTH, RANGE ....., MERIDIAN OF MICHIGAN.

A x Stone No bris
B ⊕ Post W. Oak 12 N 22° 50' W 15 1/2 lks
C ⊕ " " " 16 S 64° 5' W 94 1/2 "
D ⊕ Stone + iron Sym 1 ⊕ S 79° 40' W 62 "
E ⊕ " No bris
F ⊕ Post " Red Oak 5 N 76 1/4 E 80
G x Stone Brick B. Cherry 6 S 3° W 59
H ⊕ R.R. Iron White Ash 4 N 40° W 41
I ⊕ Stone Iron Ash 8 N 60° 45' W 50
K ⊕ O.P.F. Gas pipe No bris.
L ⊕ Post Sugar 8 N 76 3/4 E 119
Gas pipe " 24 N 24° 45' W 96
M ⊕ " Maple 4 N 22° 50' E 74
N ⊕ Post No bris
O ⊕ Gas pipe No bris
P ⊕ Iron post Sugar 16 S 12° 30' W 128 1/2
Q ⊕ Iron pin on both posts of Bridge in each side of Bridge is 12 links W 15 lks north of comm
18 in center of Road
R ⊕ Gas pipe Elm 18 S 24 1/2 E 66
S ⊕ " " 16 S 86 1/4 W 112
T ⊕ Stone Chickory B. Ash 10 N 47° 30' E 57
U ⊕ Post B. Oak 8 S 13° W 11 1/2
V ⊕ Gas pipe 14 S 10° W
22
23
U. Sawed Post Maple + N 63 3/4 W 25
V. Post
W. "
X. Gas pipe Bk ash 10 N 41 3/4 E 32 1/2
Y. Post - Elm 10 S 15 1/2 E 25
Z. " Maple 10 S 40° 25' W 16
Gas pipe Elm 10 N 25 1/4 E 0 3

T. 2

INGHAM COUNTY, MICHIGAN.

TOWN. Three NORTH, RANGE. Two East, MERIDIAN OF MICHIGAN.

In Survey No. 1823 the entire section is surveyed and all the main corners set, but the object that brought about the survey was to ascertain the line between Wright and Dean running N & S thru the N.E. ¼ of the section which was determined by running the respective ¼ section lines and connecting them so as to establish the center by transit lines between the respective ¼ section corners. Then the ten rod strip lying north of the E & W ¼ section line was located and Mrs. Wright's 10 acres by his deed was taken out of the balance of the N.E. ¼ of the Section and the west part of the W ½ of the S.E. ¼ was taken for 50 acres and and the rest except the small lots in the S.W. corner was divided equidistant between main corners

A. V. Sullivan and D.C. Seymore Sworn Chainmen

Surveyed October 20th 21st 22nd 1890

John McCreary
County Surveyor.

COUNTY SURVEYOR'S RECORD,

TOWN 3 hor NORTH, RANGE 3 wo East, MERIDIAN OF MICHIGAN.

Section 10

G-3

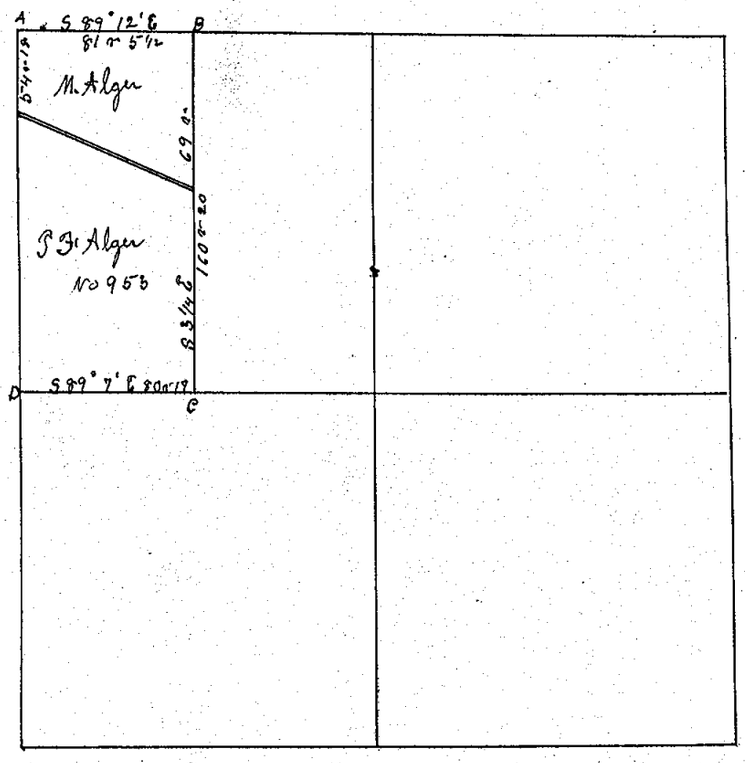

C 285 Vol 2

TOWN 3 hor NORTH, RANGE 3 wo East, MERIDIAN OF MICHIGAN.

G-3

A Sym 7 N 67 E 8
Sym 4 S 31 3/4 W 6 1/2
B W Oak 48 N 77 W 33 1/3
Sugar 16 S 68 E 62 7/8
Beech 10 S 36 1/2 E 16 1/4
C Do 14 N 8 1/2 W 2 3/4
Sym 10 S 20 1/2 E 14
D Beech 12 N 1 1/2 W 26 1/2

INGHAM COUNTY, MICHIGAN.

TOWN 3 North, RANGE 2 West, MERIDIAN OF MICHIGAN.

Run by the 3rd Meridian Var 2 1/2° E
Surveyed and Recorded May 22 on 1st
H. A Jackson Co Surveyor

SOURCE: RECORD OF CO. SURVEYOR V. 3 P. 206

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

206

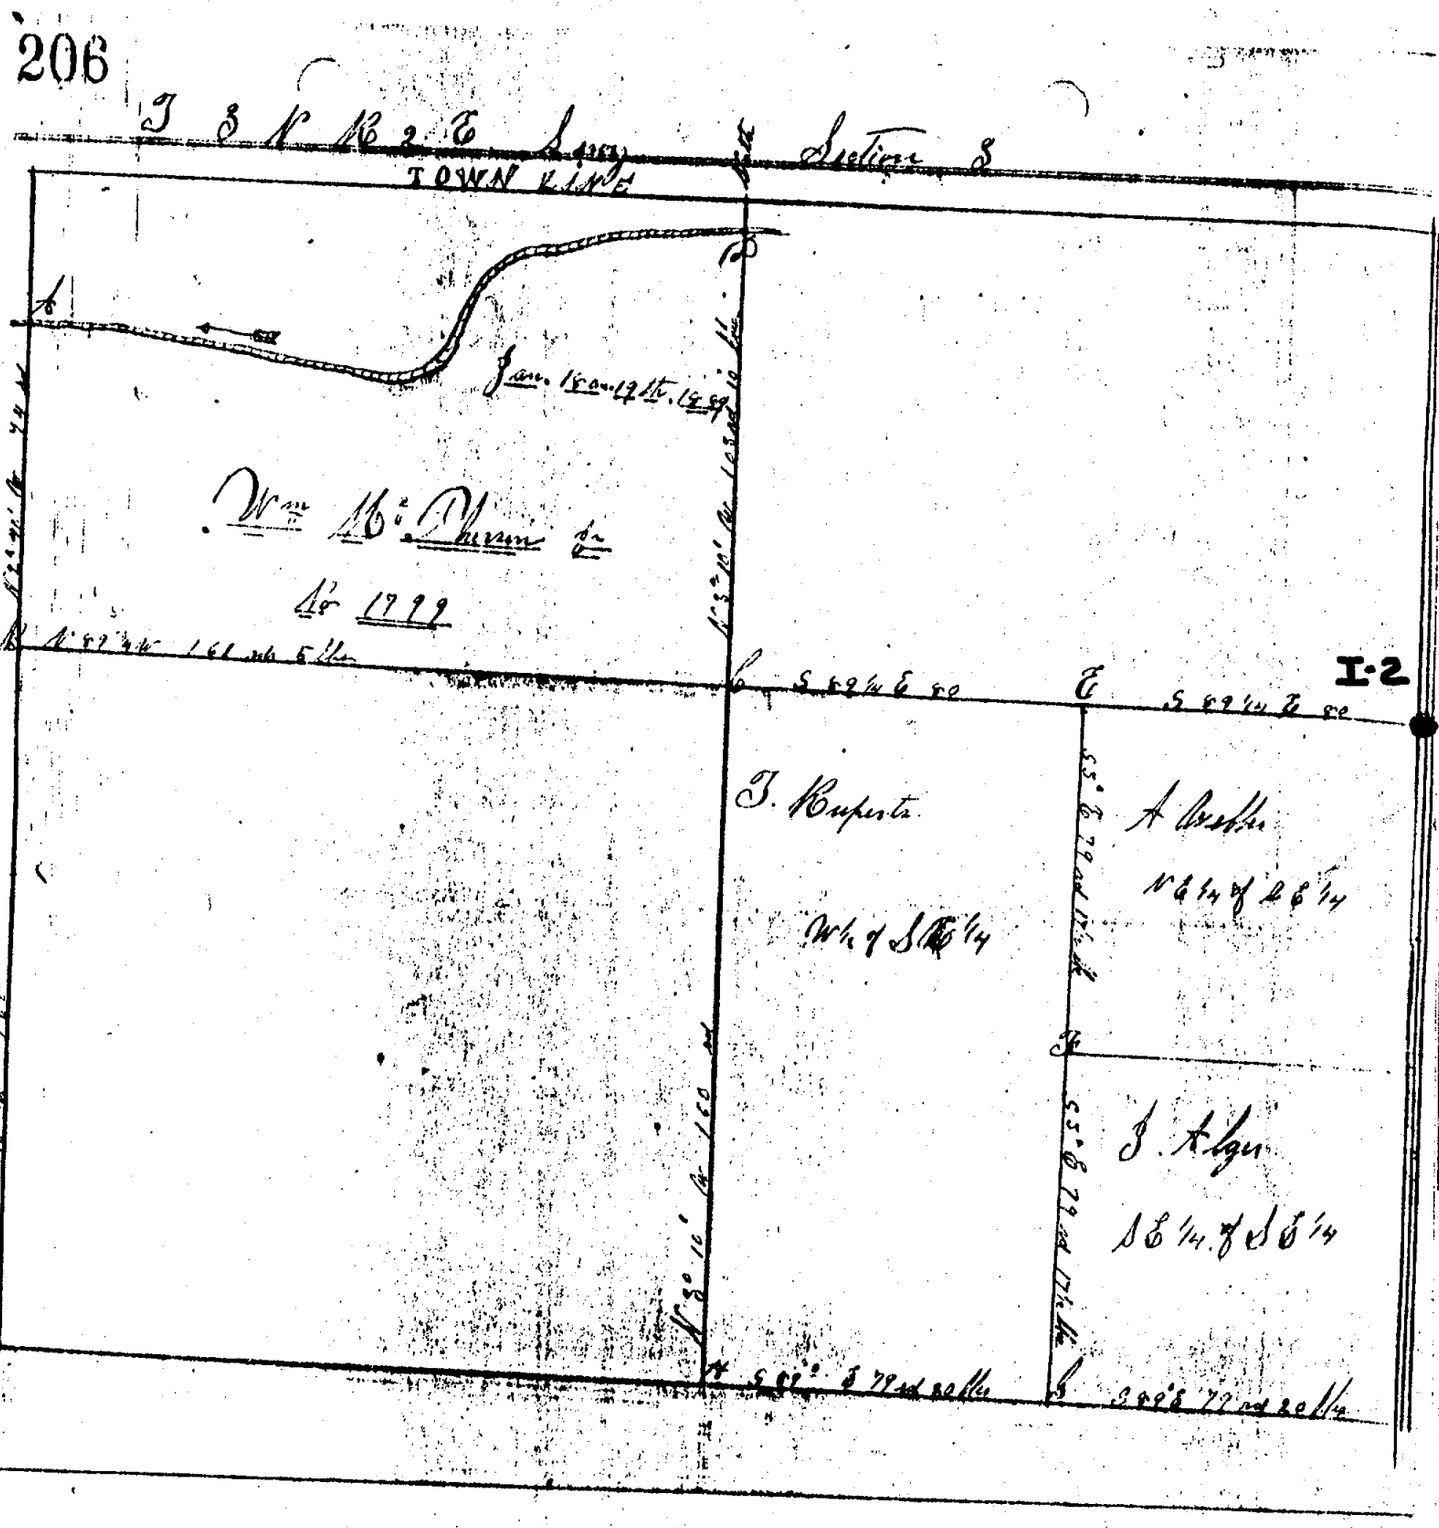

LEROY township T 3 N, R 2 EW I-2 corner code 2 attachment no. p. 1 of 2

SOURCE: RECORD OF CO. SURVEYOR V. 3 P. 206

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

Station	Post	Witness Trees	Bearing	Lks	Station	Post	Witness Trees	Bearing	Lks
1	Swamp Oak Stake	Maple 20 in	S 46 E	29	5	Fence post	corner stat wood wire fence		
" "	" "	" 7 "	due E	38	4	Fence post	corner stat wood wire fence		
12	Red Elm Stake	No tree near							
2	Iron Wood	Beech 6 in	S 50½ W	6					
" "	Stake	" " 6 "	N 53 W	5 2½					
11	White Elm	Ash 10 "	N 68 W	32					
" "	Stake	Red Elm 10 "	S 28 W	96½					
10	Stake	No tree near							
9	Post	" "							

206

LEROY township T 3 N, R 2 EW I-2 corner code 2 attachment no. p. 2 of 3

SOURCE: RECORD OF CO. SURVEYOR V.3 P. 206

TRANSCRIBED from DUPLICATE on file at REMON. OFFICE

Survey of the N.W. fr'l 1/4 of Section three of Township Number three North of Range Number two East, Lewy, the foregoing survey establishing the Boundry lines and corners of all that part and parsal of the said N.W. fr'l 1/4 of sec. three laying South of the Cedar River I find the 1/4 section post on West side of the section at station B. Was extinct and I established it by measurement and correction of the random line run from the sec corner of sections 9 + 10 and 3 + 4 and running N. 2° and 40' west 160 rds to 1/4 section post and thence N 2° 40' West 74 rds to Cedar River where station A is established I then run the N and S 1/4 section line N. 3° and 10' west 160 rds to station C. and thence N. 3° and 10' West to station D. at cedar river and fore the line by intersecting the North Boundy line at 1/4 section post I then corrected the E. and W. 1/4 sec line from C. to B. 161 rd 6 lks and leaving them marked by stakes driven in and upon the corrected lines at every twenty rods distant, the magnetic Bar being estimated at 15' of one deg East and set off by the vernier of the compass Surveyed from 16th and 19th A.D. 1889.

C.B. Courtis

Recorded Jan 22 and 24 1889

Jay R. Fairbanks, Chainmen

John McCleary, County Surveyor.

The corners E + D were located by measurement and division on November 7th 1889.

The corner A + B was located by me in the survey made on the 12 day of August A.D. 1889 the corner A was identified by the N.E. Bearing tree and the old post found December 9th 1889

John McCleary County Surveyor

LEROY township T 3 N, R 2 EW I-2 corner code 2 attachment no, p. 3 of 3

SOURCE: RECORD OF CO. SURVEYOR V.3 P. 228

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

228

T 3 N R 2 E Survey Section No 2

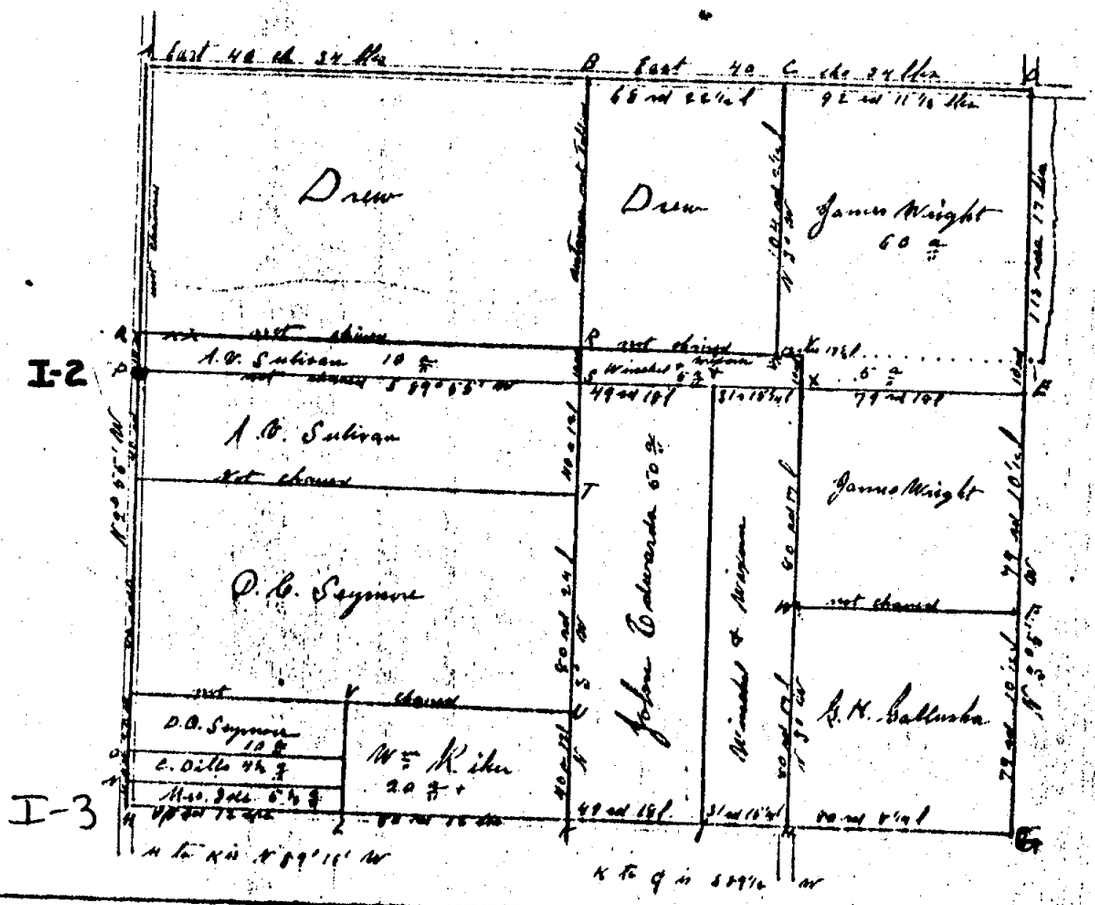

LEROY township T 3 N, R 2 EW I-2 corner code 3 attachment no. p. 1 of 3

SOURCE: RECORD OF CO. SURVEYOR V.3 P. 228

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

Survey Number 1828

Station	Timber	Diameter	Bearing	Links
A Stone	no tree			
B Post	W Oak	12	N 22° 30' W	15½
C " "	W Oak	16	S 64° 15' W	94½
" " "	W Oak	18	N 8° E	137
D Stone near Drain	Lynn	16	S 29° 40' W	62
E Stone no tree				
F Post no tree				
G Stone Brick	Red Oak	5	N 76¼ E	80
" " "	Black Ash	6	S 31 W	59
H R.R. Iron	White Ash	4	N 4 W	41
I Stone Pipe	Elm	5	N 60° 45¼ W	50
J Safe Pipe no tree				
K Post	Sugar	6	N 76¾ E	119
M Safe pipe	Sugar	24	S 24°45' W	94
" " "	Maple	4	N 22° 60' E	74
N Post no tree				
O Safe pipe no tree				
P Stone Post	Sugar	16	S 12° 30' W	128½
Q Stone Pipe	center post of Bridge on East side of Bridge			
is 12 rods and 16 lks North of corner in center of road				
R Safe pipe	Elm	18	S 29¼ E	64
" " "	Elm	16	S 56¼ W	112
S Stone creek	Black Ash	10	N 47° 60' E	67

Station	Timber	Diameter	Bearing	Links
3 Post	Red Oak	3	S 15 W	11½
" " "	Sassafras	14	S 10 W	5
Mound Post	Maple	4	N 63¼ W	25
V Post				
W Post				
X Safe pipe	Black Ash	10	N 41¾ E	S 2¼
Y Post	Elm	10	S 15¼ E	2
Z Post	Maple	10	S 40° 25' W	16
+ Safe pipe	Elm	10	N 29¾ E	53

LEROY township T 3 N, R 2 E W I-2 corner code 3 attachment no. p. 2 of 3

SOURCE: RECORD OF CO. SURVEYOR V.3 P. 228

TRANSCRIBED from ORIGINAL/DUPLICATE on file at REMON. OFFICE

228

In Survey Number 1825 the entire section is surveyed and all the main corners set but the object that bought about the Survey was to ascertain the line between Wright and Drew running N & S in the N E 1/4 of the Section which was determined by Running the respective 1/4 section lines and connecting them so as to establish the center of transit lines between the respective 1/4 section corners then the ten rod strip laying North of the E & W 1/4 section line was located and Mr Wrights 60 acres by his deed was taken out of the balance of the N E 1/4 of the section and the West part of the West 1/2 of the S E 1/4 was taken off 50 acres and the rest except the small lots in the S W corner was divided equi distant between main corners

A. V. Sullivan and D. L. Seymour
Board Chairmen

Surveyed October 20 st 21 st 22 nd 1890

John M. Creary
County Surveyor

LEROY township T 3 N, R 2 EW I-2 corner code 3 attachment no. p. 3 of 3

SOURCE: FOLDER #1 P. 2

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

Town 1 N. Range 2 W. Section No. 2

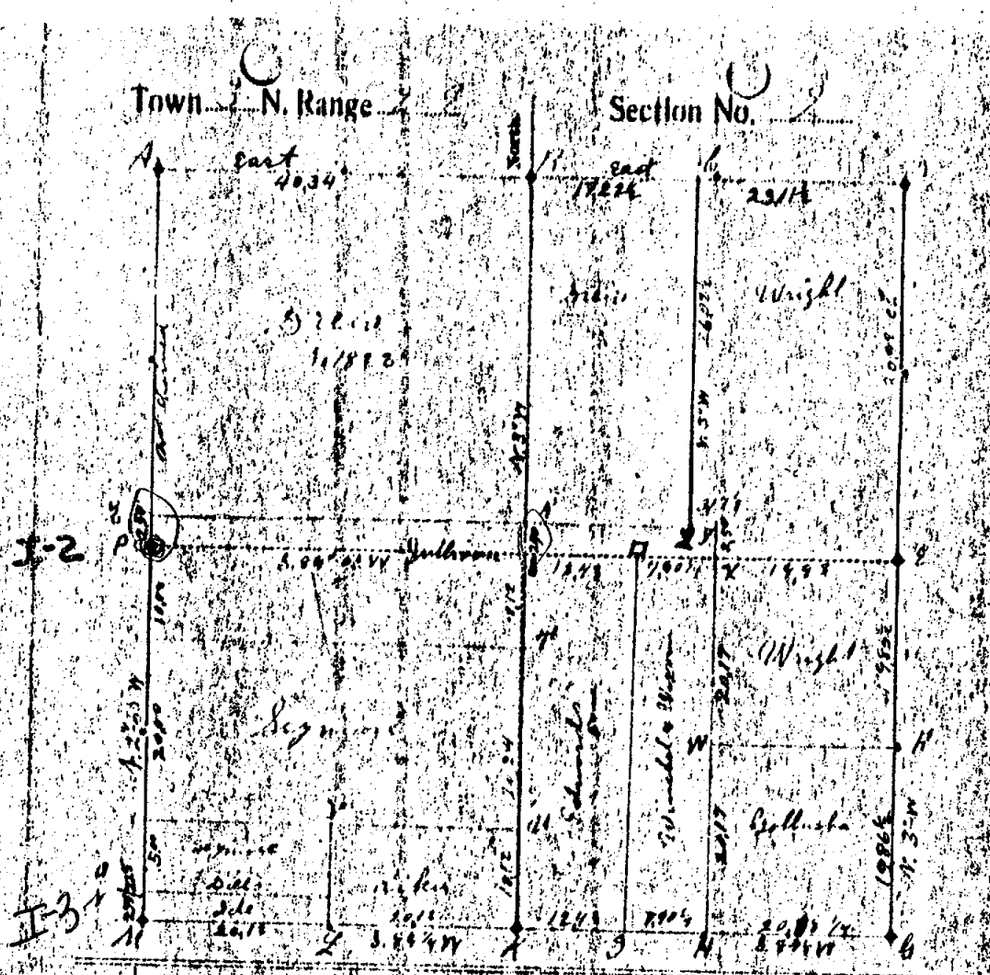

Sect'n	Timber	Diam	Bearing	Links	Sect'n	Timber	Diam	Bearing	Links
A									
D									
E									

I-2

Run by the true meridian. Magnetic variation [illegible] degrees [illegible] minutes E.

Surveyed the 24, 25 & 27 day of Oct 1880 by

[illegible]

County Surveyor of Ingham County, Michigan.

5

Sec. 2

2

LEROY township T 3 N, R 2 E ~~W~~ I-2 corner code 8 attachment no, p. 1 of 1

SOURCE: FOLDER #1 P.3

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

Town 1 N, Range 1 E Section No. 2

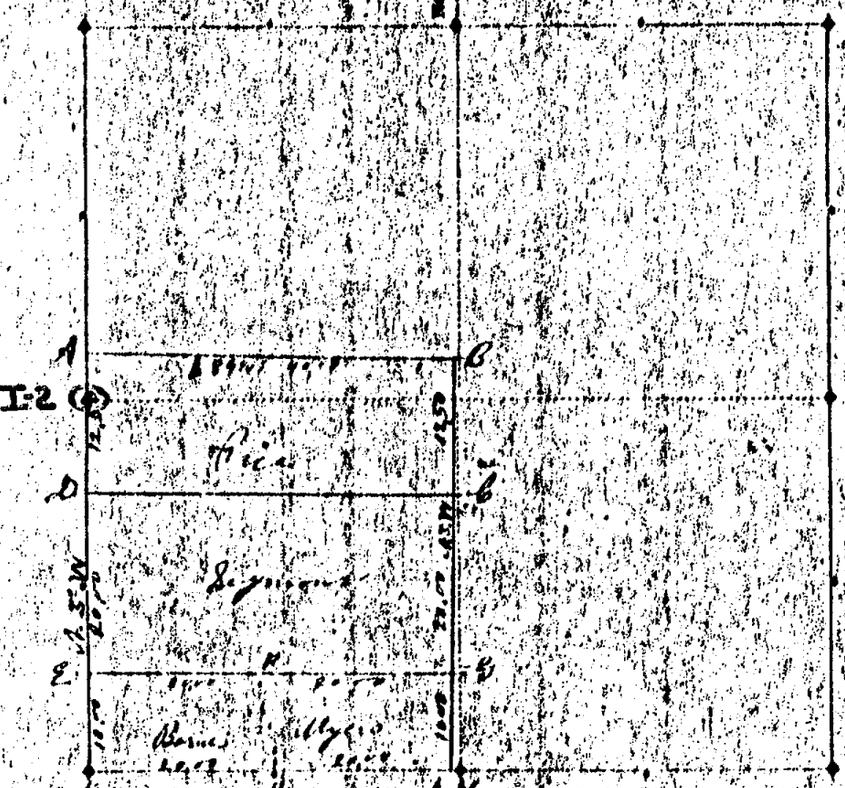

Point'n	Timber	Diam	Bearing	Links	Point'n	Timber	Diam	Bearing	Links
H	Post								
C	Pointers set								
D	Post 4 pointers								
A	Post 4 pointers								
C	Witness	12	N 1/2 E	11½					
C	Post								
B	Post in Salamonie creek								
B	Post 16 L. W. 1 1/2 feet								
H	8 1/4 post 4 pointers								
	Bears B. 1 1/2 feet [illegible]								

Run by the true meridian. Magnetic variation 2 degrees 15 minutes W.

Surveyed the 4 day of Dec 1848 by

J. G. Brown

A. D. County Surveyor of Ingham County, Michigan.

Sec. 2

2

3

LEROY township T 3 N, R 2 E I-2 corner code 9 attachment no. p. 1 of 1

SOURCE: FOLDER #1 P.4

TRANSCRIBED from ORIGINAL / DUPLICATE on file at REMON. OFFICE

Town 3 N. Range 2 E. Section No. 3

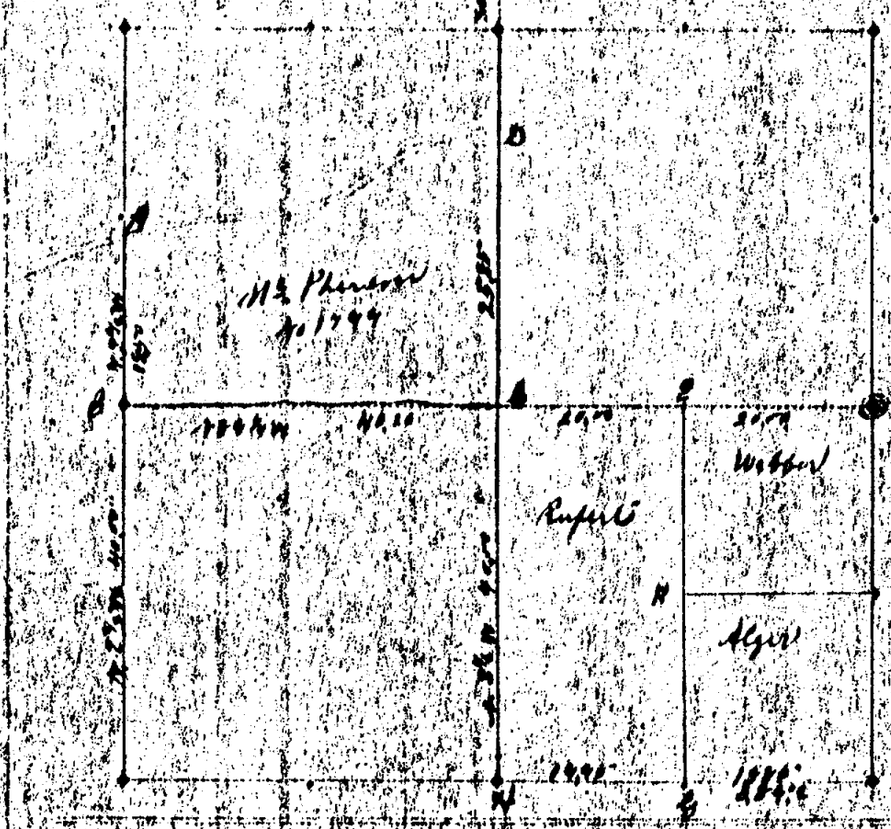

Pos'n	Timber	Diam	Bearing	Links	Pos'n	Timber	Diam	Bearing	Links
A									
B									
C									
D									
E									
F									
G									
H									

Run by the true meridian, Magnetic variation 2 degrees 15 minutes W

Surveyed the 16 & 17 day of June 1859 by

John Mills Cramer

County Surveyor of Ingham County, Michigan.

Sec 3

4

LEROY township T3N, R2E I-2 corner code 10 attachment no. p. 1 of 1

SOURCE: FOLDER #2 P.1

TRANSCRIBED from [redacted] DUPLICATE on file at REMON. OFFICE

T. 3N. R. 2 E. Sec 2.

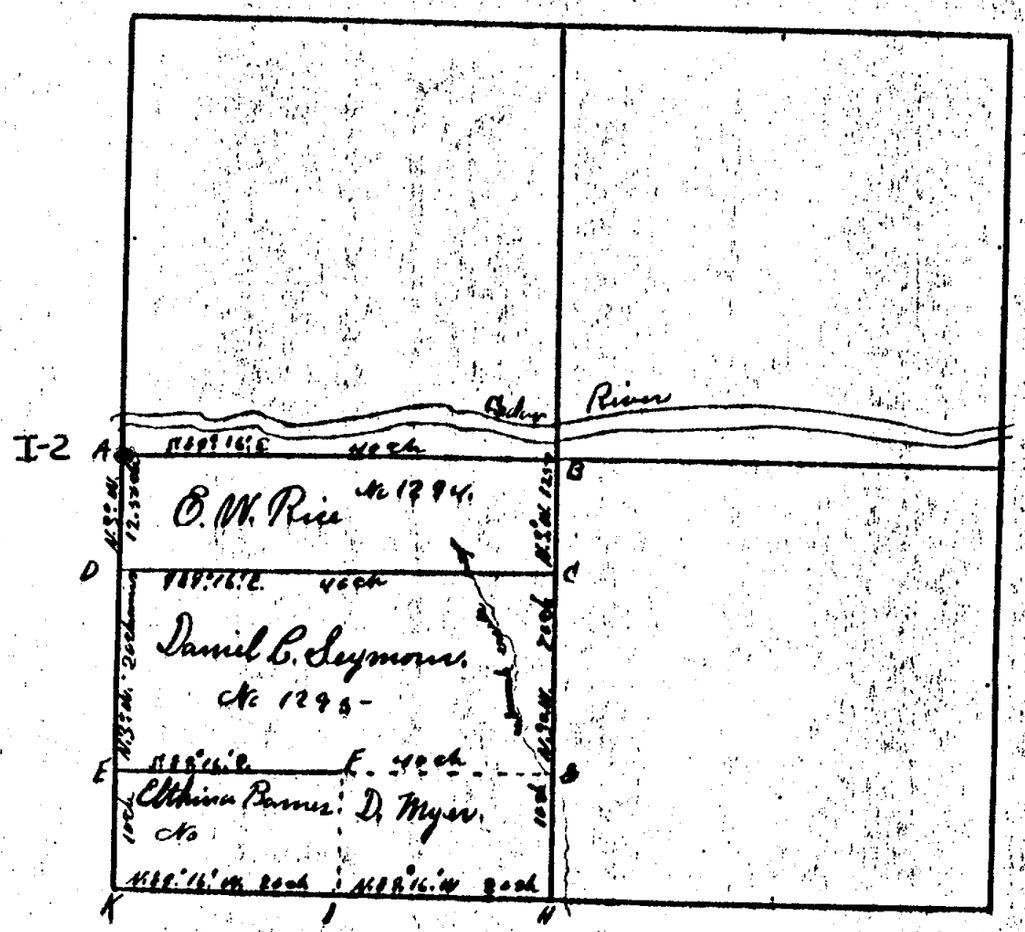

LEROY township T 3 N, R 2 E W I-2 corner code 11 attachment no. p. 1 of 2

SOURCE: FOLDER #2 P1

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

	Station	Corner.	Timber.	Bearing.	Links.	Station	Corner.	Timber.	Bearing.	Links.
I-2	A	Post								
	B	" not surveyed								
	C	Post	W.O. 12	N 57° E	11 44					
	D	Post								
	E	Post								
	F									
	G	Post	in mound							
	H	"								
	I									
	K									

T. J. Brown Dep. County Surveyor.

Var. 2 deg. min. East

Liber 8 Page 42

Dec 4th 1868

2

LEROY township T 3 N, R 2 E W I-2 corner code 11 attachment no. p. 2 of 2

SOURCE: FOLDER #2 P.2

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

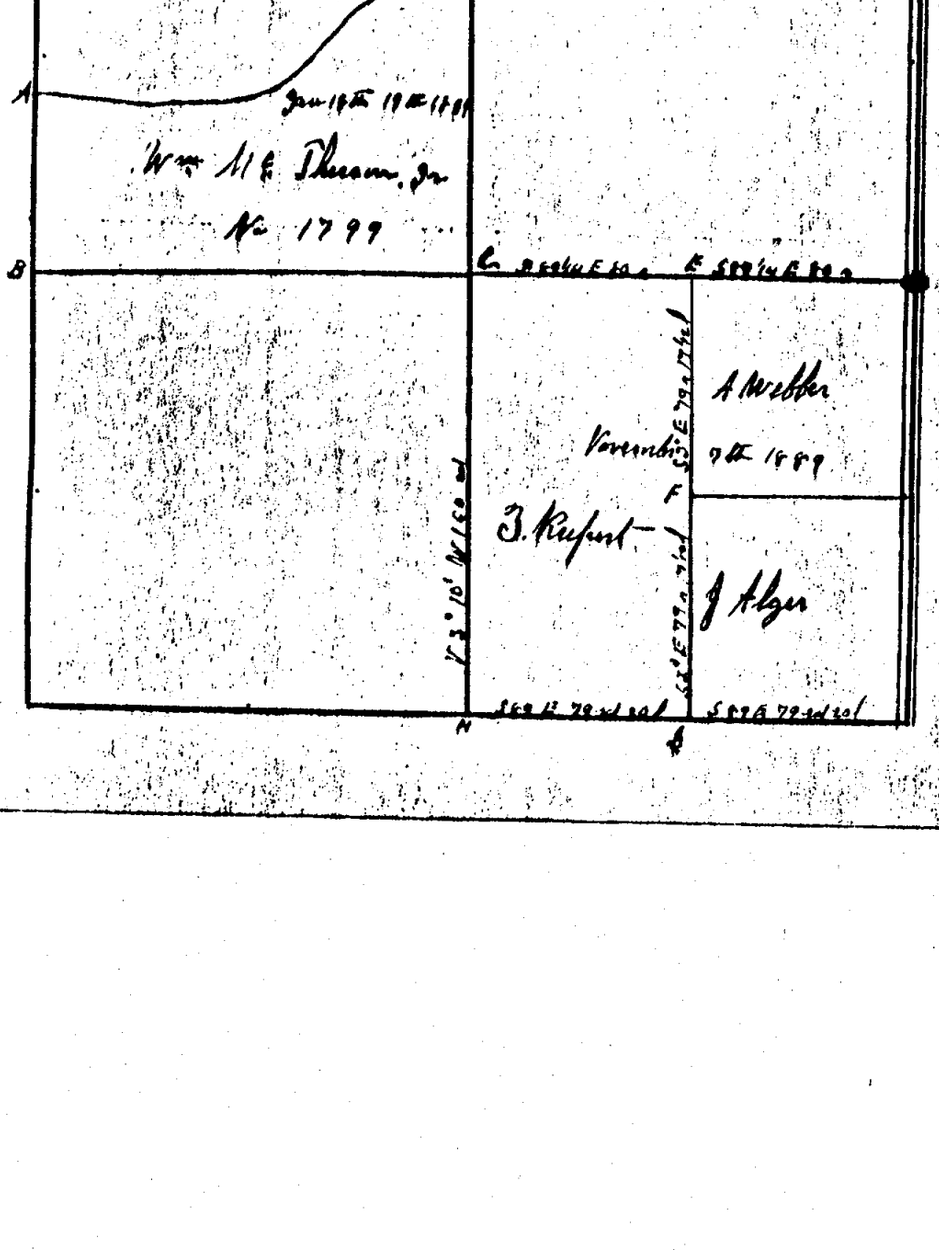

LEROY township T 3 N, R 2 E W I-2 corner code 12 attachment no. p. 1 of 2

SOURCE: FOLDER #2 P2

TRANSCRIBED from ~~ORIGINAL~~ DUPLICATE on file at REMON. OFFICE

Station	Corner.	Timber.	Bearing.	Links.	Station	Corner.	Timber.	Bearing.	Links.
A	Sm & stake	Maple 20	S 45 W	29					
	ore vine Rock	a " 7	East	38					
	Red Elm								
B	Stake	ore Elm ore							
b	Stone	Beech 6	S 30 ½ W	6					
O	Stake		N 53 W	62 ½					
	white Elm	Red Elm 10	S 25 W	96 ½					
	stake	Ash 10	S 65 W	32					
C	stake ore	Elm							
3	Post	"							
S	3 ores	post ~~corner~~ stake & ores		from					
X	3 ores	post corner stake & ores		from					

John M. E. Creamer County Surveyor.

Var. 6 deg. 15 min. E.

Liber 5 Page 206

2.

LEROY township T 3 N, R 2 E ~~W~~ I-2 corner code ~~12~~ attachment no. p. 2 of 2

I-4

Leroy

TOWN 3 NORTH, RANGE Two East

202 6	203 311 5	309 4	3	2	1
7	205 8	207 9	359 10	11	12
18	204 305 310 330 335 17	16	15	14	13
235 19	304 305 20	306 21	307 329 22	328 334 23	24
164 30	165 29	28	27	26	25
31	32	33	34	35	342 36

LOCKE

TOWN Town NORTH, RANGE Two East

6	5	182 4	3	341 2	1
7	8	9	265 10	263 264 11	12
18	180 351 17	16	15	14	13
19	20	181 21	22	340 23	339 24
30	289 29	213 28	357 27	26	25
336 31	312 32	314 338 33	337 34	35	36

COUNTY SURVEYOR'S RECORD.

TOWN Three NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

SEC. 4

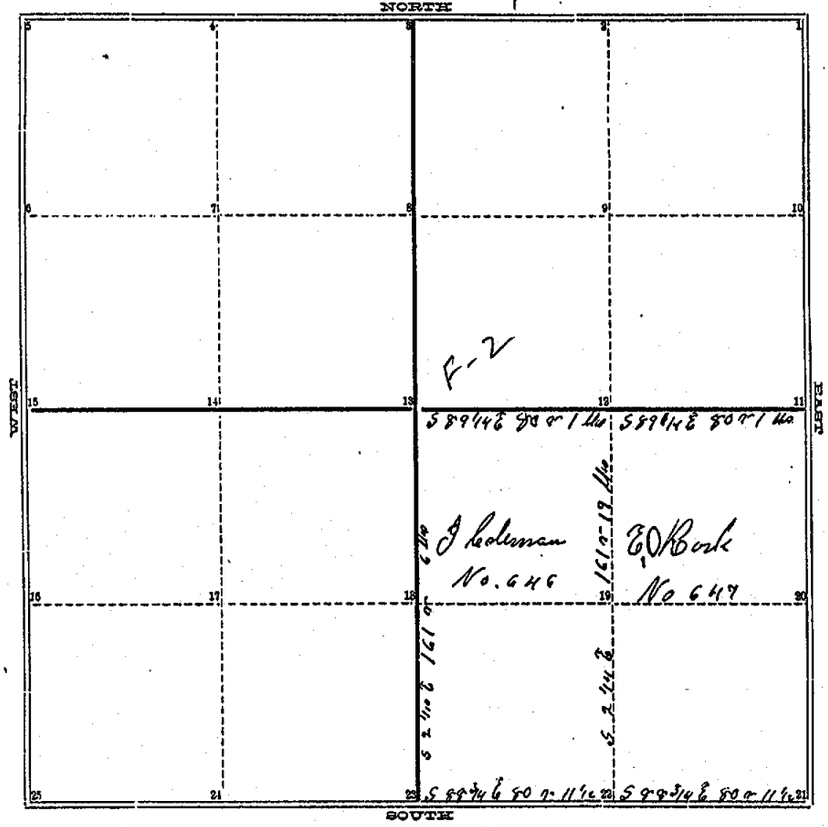

T 153 Vol 2

TOWN Three NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

1
2
3
4
5
6
7
8
9
10 Beech 7 S 11 E 27
11 Beech 3 N 22 W 12
Sugar 11 N 23½ E 18½
12 Elm 26 N 60 S/4 W 31
Maple 20 North 6
13 Beech 8 S 62 E 14
14
15
16
17
18
19
20 Sugar 7 N 69 E 8
21 Sugar 4 S 31 ¾ W 6½
Sugar W Oak 3 S 59 W 44
22 Dam 8 S 29 E 19.5
Beech 3 N 87 E 15
23 Beech 3 N 37½ W 4½

24
25

INGHAM COUNTY, MICHIGAN.

TOWN Three NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

Run by the true Meridian Var 2° 50' E
Surveyed and Recorded June 22nd 1853
by A Jackson Co Surveyor

Note. In the above survey the corner A to 13. Was located in the middle of the quarter line C to D 11 to 15 subject to alteration in case the line J and A. 23 and 13 continued to the North line should not intersect at the middle point of the North line of the Section which was not ascertained when the said corner A. 13 was noted as above but subsequently the line J. + A. 23 + 13 was continued to the North line of the Section and intersected it 15 links East of the middle point afore said hence the corner A. 13. should be set 7½ links to the West and thus corrected the Notes are as follows A 13 Maple 20 - N. 47¾ E 9¾ lks Beech 8 S 72 E 22 lks and the line A + J. 23 to 13 bears S 2° 15' E J J Brower Dep Co Surv

Note Note at No. 3. Stone 5 links West of gas pipe at Locke corner Sept 10, 1890
John McCreary Co. Surveyor

COUNTY SURVEYOR'S RECORD,

TOWN 3 Town NORTH, RANGE 3 West East, MERIDIAN OF MICHIGAN.

SEC. 33

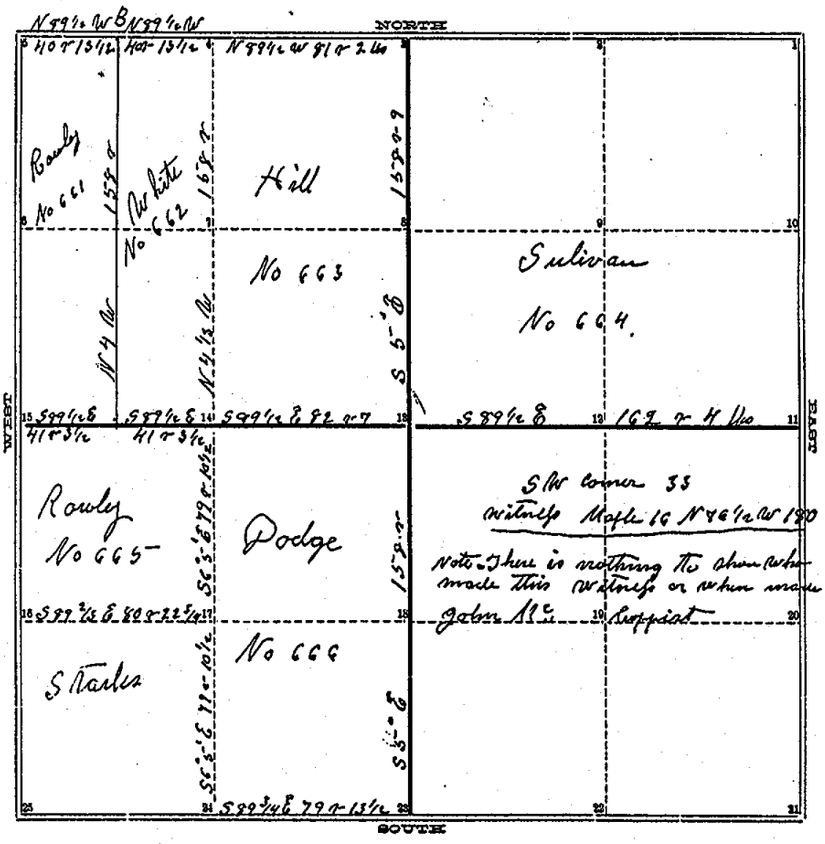

T 158 Vol 2

TOWN 3 Town NORTH, RANGE 3 West East, MERIDIAN OF MICHIGAN.

Bush 8 S 4 W 25
E 1 Sugar 20 N 39 E 40

2 Bron 5 N 40 E 18
d 3 Sugar 16 S 3½ E 23
Maple 9 N 5-3 W 18 3/4
C 4 Elm 11 N 55½ E 49½
Sugar 8 S 89 W 15
a 5 Buch 9 N 28 W 41½

6
7
8
9
10 Buch 13 S 14½ W 7
F 11 Ash 8 N 46 E 38½

12 Chery 5 N 38½ W 92
G 13 Chery 16 S 27½ E 106½
Elm 22 N 41½ E 69
H 14 S Sug W Oak 52 N 75 3/4 E 67
Bl Oak 17 S 5 E 15
H 15 Bron 4 S 5 W 9
Elm 16 N 17 E 61 1/4
L 16 B Ash 8 S 20 E 5-0
Buch 9 S 31½ W 14 4/5
M 17 D 0 20 N 62 W 67

18
19
20
21
22 Buch 10 N 84 E 37
O 23 Sugar 16 S 2 E 46

Buch 13 N 69 W 5-6½
N 24 D 0 13 N 45 E 70

25 Buch 11 S 64½ E 35-½
B Maple 6 S 38½ W 11
W Oak 24 N 12 E 15-6
J D 0 18 N 69 2/3 W 140

NO INFO ON LEROY COR'S

INGHAM COUNTY, MICHIGAN.

TOWN Three NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

Run by the true Meridian Var 2°50' E
Surveyed and Recorded August 31 st 1855
by A Jackson Dc Surveyor

INGHAM COUNTY, MICHIGAN.

TOWN Four NORTH, RANGE One East, MERIDIAN OF MICHIGAN.

Runs by the True Meridian Var 2° 50' E
Surveyed and Recorded Oct 3 rd 1853 by A Jackson County Surveyor

S E corner of Section 34 witnessed by a hickory 2 ln S 84¾ E 19 lks.
Do 5 S 81 W 29½ lks
Sept 24 th 1878 A T Drake Co Surveyor

COUNTY SURVEYOR'S RECORD,

TOWN Four NORTH, RANGE One East, MERIDIAN OF MICHIGAN.

SEC. 34

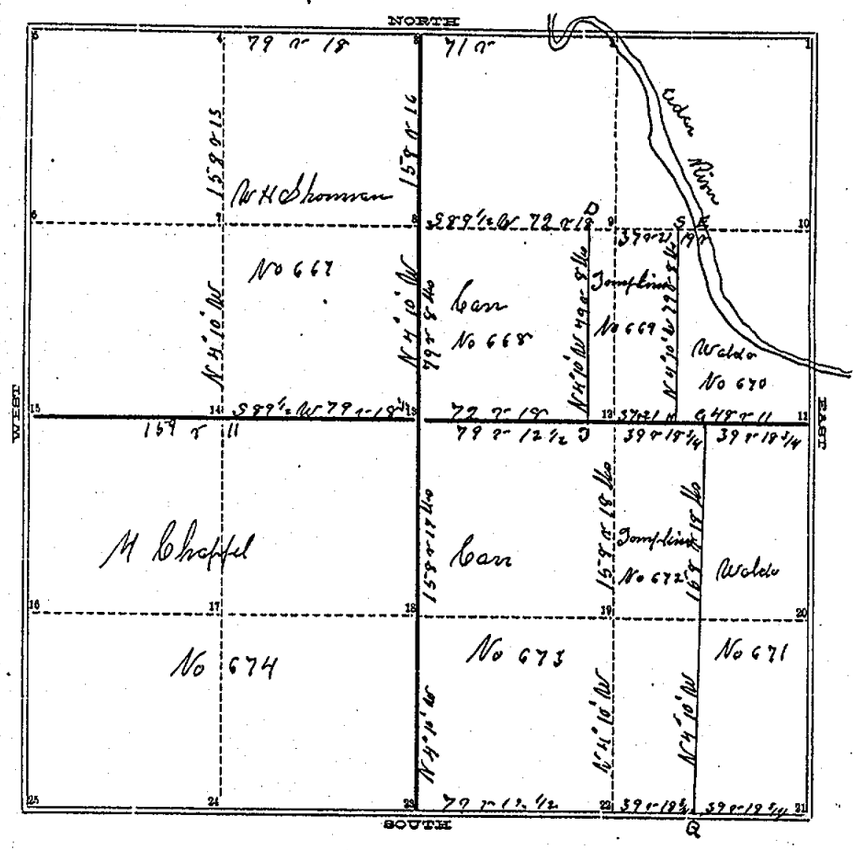

159 Acres

TOWN Four NORTH, RANGE One East, MERIDIAN OF MICHIGAN.

1

2 Beech 10 S 25 E 12½

3 Sugar & Maple 8 N 63½ W 29
Iron & Beech 5 S 57 W 11½

4 Beech & Maple 8 S 64½ E 6½

5

6

7 Beech 19 N 65 E 27⅔

8 Do 10 N 12¼ W 30

9

10 Ash 7 S 70 E 7

11 Hickory 25 N 25 E 25
White Oak 30 S 81 W 23½

12 Sugar 14 N 16 W 37⅔
Basswood 24 N 37 W 18

13 Do 26 S 44 W 29
Beech 11 N 40 W 5

14 Iron 14 S 30 W 26
Beech 12 N 63½ W 18½

15 Do 9 N 45 E 13½

16

17

18

19

20 Beech 6 N 30½ W 34

21 Iron 4 N 66 E 15
Beech 14 N 86 E 33

22 Do 9 S 8½ W 10¾
Beech 15 N 66 E 80

23 Do 12 N 12¼ E 62½

24 Beech 7 N 89½ E 5½

25 Do 8 N 46½ W 10

D In Swamp

E Sap White Oak 12 S 45½ W 5½ To River No other tree
Maple 10 N 77 W 32

G Hickory & Maple 21 E 18¼
Maple 14 N 32 E 26

H Beech 6 N 88½ W 14
Beech 10 N 36 E 11

Q Do 10 N 22 W 9

S In Swamp
White Oak 30 S 12½ E 30

J Beech 10 N 51 W 19

COUNTY SURVEYOR'S RECORD,

TOWN Iosco NORTH, RANGE Iosco East, MERIDIAN OF MICHIGAN.

SEC. 35

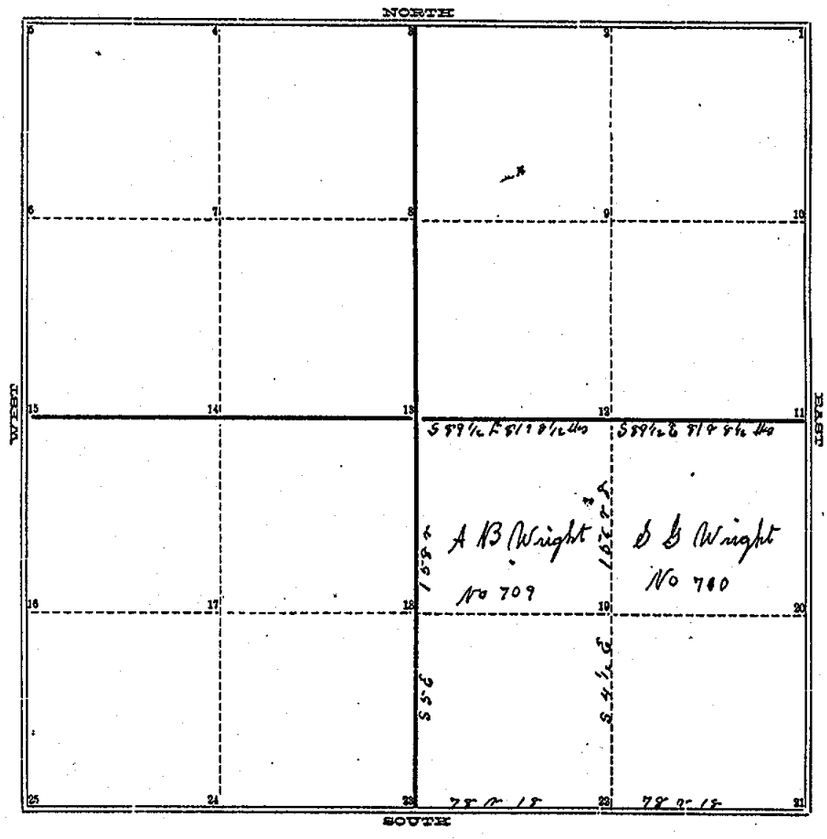

Plat 180 Rods

TOWN Iosco NORTH, RANGE Iosco East, MERIDIAN OF MICHIGAN.

1
2
3
4
5
6
7
8
9
10 Buch 13 S 14½ W 7
c 11 A ash 8 N 46 E 58½
Buch 7 S 7 W 79
B 12 S sugar 9 S 54½ W 107 New Stone crosses S sugar 5 S 44½ W 59
Obely 5 N 37½ W 92 S sugar 10 N 47° 50' E 64.84/4
a 13 Do 16 S 27½ E 106½ New Stone crosses S sugar 3 S 5 E 37½ Sept 10 1890 John Young and John McBeen
Beech S sugar 4 S 51 E 64 Lehamimm
14
15
16
17
18
19
20 Buch 6 N 72½ W 16
D 21 Do 10 N 78 E 34
S sugar 16 S 77 W 35
E 22 Buch 11 N 2½ W 58½ New Basspipe W O 14 N 46¼ E 271
Buch 10 N 84 E 57 S sugar 4 S 76½ E 85 Sept 10 1890 John McNeeseary
F 23 S sugar 16 S 2 E 46 New Basspipe & plants S sugar 4 N 0° 45' W 4 S sugar 4 S 2½ E 28 Co Surveyor

INGHAM COUNTY, MICHIGAN.

TOWN.....NORTH, RANGE.....EAST, MERIDIAN OF MICHIGAN.

Run by the true Meridian Var 2 2/3 E
Surveyed and Recorded Feb 1 st 1854
by A Jackson Co Surveyor

COUNTY SURV. 'OR'S RECORD,

TOWN Town NORTH, RANGE Two West, MERIDIAN OF MICHIGAN.

SEC. 34

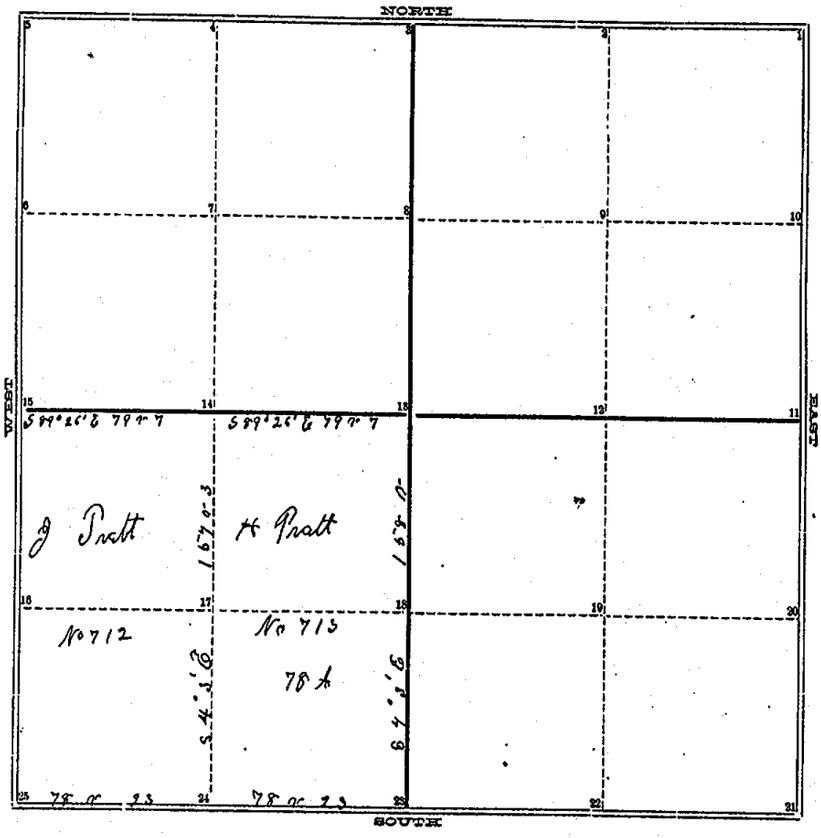

Plat Red 2

TOWN Town NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

1
2 E 24 Beech 10 S 75 E 2 1/2 — D O 14 S 3 W 41 — D O C N 72 1/2 W 16
3 E 25 D O 10 N 75 E 34
4
5
6
7
8
9
10
11
12 W Oak 5 S 7 1/2 E 60 1/2
C 13 Beech 8 S 55 1/2 E 76 1/4 — W Oak 15 S 52 3/4 E 74 1/2
B 14 S sugar 9 S 8 E 70 — Beech 13 S 14 1/2 W 7
a 15 Ash 8 N 46 E 38 1/2
16
17
18
19
20
21
22 S sugar 17 N 70 E 10
D 23 Maple 13 N 36 W 60

NO INFO ON LEROY COB'S

INGHAM COUNTY, MICHIGAN.

TOWN Four NORTH, RANGE Two East, MERIDIAN OF MICHIGAN.

Run by the true Meridian Var 2 2/3 E
Surveyed and Recorded Feb 2nd 1854
by A Jackson Co Surveyor

COUNTY SURVEYOR'S RECORD,

TOWN Three NORTH, RANGE Three East, MERIDIAN OF MICHIGAN.

SEC. 10

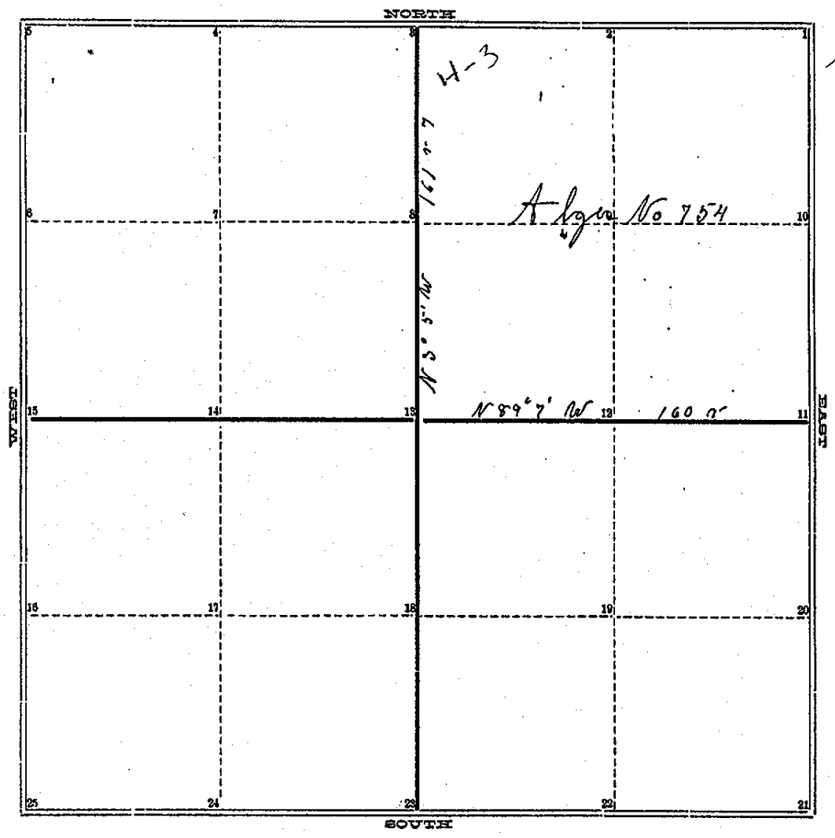

P 204 vol 2

TOWN Three NORTH, RANGE Three East, MERIDIAN OF MICHIGAN.

	Buch 20 S 14½ E 19	
B 1	Do 10 S 5-7 W 14	24
2	Buch 6 N 84 W 27	25
A 3	Do 12 S 7½ E 11½	
4		
5		
6		
7		
8		
9		
10	Buch 4 S 51 E 4½	
C 11	Buch 9 S 87 W 17	
12	Buch 10 N 77 2/5 E 61	
D 13	Buch 10 S 77 W 5-4	
14		
15		
16		
17		
18		
19		
20		
21		

INGHAM COUNTY, MICHIGAN.

TOWN 3 here NORTH, RANGE 3 wes East, MERIDIAN OF MICHIGAN.

Run by the true Meridian Var 2 ¾ E
Surveyed and Recorded June 12 th 1864
By A Jackson Co Surveyor

Poplar 10 in S 77 E 13 lks } Bearing Trees to the center of section 11. 3 N R 2 E
Do 12 in S 48 W 24 lks } for H. Donner