

SOKKIATM

571

TRANSIT
FIELD BOOK

No. 8152.00

Index

1	G-3 Summary record info & recovery report	
2	G-2	Do
3	G-1, G-13, TZU, RZE	Do
4	F-3	Do
5	F-2	Do
6	F-1, F-13, TZU, RZE	Do
7	E-3	Do
8	E-2	Do
9	E-1, E-13, TZU, RZE	Do
10	D-3	Do
11	D-2	Do
12	D-1, D-13, TZU, RZE	Do
13	C-3	Do
14	C-2	Do
15	C-1, C-13, TZU, RZE	Do
16	G-3 Cont.	Do
17	The Occupation to verify, F-1	
18-26	Trav. Sec. S, TM, RZE	
27	Check Trav. Distances	
27	The Fd. 1/2" B&C @ D-3	
28	The C-3	
29-30	The Occupation lines S Line	
	Sec. S.	
31	1994 Contract Monument to join Surv.	
	Notes & Abbreviations	

①

G-3 X

Original Post Set By George Young

Nov. 17 1825

B. Oak 14" 56E 17 1/2

B. Oak 14" 56E 17 1/2

2. John Young - Supposed Co. Surv. Surveyed

Sec 3 in 1873 - Unmarked G-3

Y.O. 6" 125 1/4 5345 (35.0')

Y.O. 6" 119 3/4 596 (63.4')

STI

George Young

17640 in Jun 1872 L 1 p 627

as Set 5/8" Steel Bar on E Bush Rd

Fore Lines East and West after

Excavation and finding nothing.

55E 44.54 spike in 18" Walnut

WWD 21.67 spike in B" Oak

East 39.75 spike in 18" Oak

DLC
JPT40°
16 Apr. 94 ①

Corner used in survey recorded in

L 1 of Survey pg 342 E. & Young

with Surv. man & witnesses as

A-2

George Young again used in Surv.

Recorded L 2 pg 319 Surv. man

with witnesses as A-2

Corner used by A. Williams L 1 pg 21275

in Surv. Rec in L 3 pg 36 Surv. as A-

George Young L 1 pg 346 Surv. as A-2

Ken Enzer recorded Cor in L 7 of Surv. pg 352

as a found 3/4" 1/2" proved to be

same for as Corner recorded by

George Young by using 2 of Young's

witnesses - Field work performed by

this Surveyor

Ward Chap 25337 in 8" Hick. N 40° E 40.0

Ward Chap 25337 in 18" Oak East 39.68

Ward Chap 25337 in 18" Walnut 53.0E 44.5E

Ward Chap 25337 in 14" Oak 52.0E 85.85

Cont on Page 16

ST 1

G-2 -	Post	Set E	Joseph
ORANGE	D.S. in	Nov. 1888	
Iron	20" S 50° E	50	
W. Oak	3 5 73 E	55	
2 Corner Use	By T.J. Barker	Co. Sur.	
in 1878	with men	of same unit.	
100 ft 1879			
3. Yokum Surv.	in 1878 - 1879	with men	
W.O. 12" N 49° E	37 45	(24.4)	
Iron	W.O. 20" S 72° W	55 45	(36.3)
1/4 - G. Young	4 3 75	57 5	61 76
- F.J. Archer Post			
Spk. in 24" Oak	S.E. 49.60		
Spk. in 30" Oak	N.E. 23.70		
Spk. in 8" Cherry	wood 23.70		
132 G. Young	41 15	34 2	Some Men Surv.
12 15	81 9	"	"
A. Williams	13 15	30 9	"
7 Cor. Recovered	By D. Clifford	during Survey	
Coll. der Project	Fd. Capped Iron	# 1657000	Arch.
Spk. in 8" Cherry	wood. 22.25		
Spk. in 8" Cherry	wood. 20.75		
Spk. in 30" Oak	Grump N.E. 23.70		
Spk. in 24" Oak	S.E. 50.00		

DLC

JP

740

16 APR 94

(2)

18 A. 132 E. Antell	Subject Coll. der Post
45 135 790-793	812-831, 840-843
Oct 1888	Some Men of 1st Infantry
R. Hells 1 Oct 93	47 23 24
Some Men of 1st	Witnessed at Iron T

Searched @ Apparent Location of Corner and Found 1/2" Box w/ cap #13574 @ South Base of Archer Post with all of My 1988 witnesses still standing. The 36" Oak stump in the N.E. Quad is almost certainly Yokum's 1878 witness. Pulling 24.4' from the point that would have been the face of a 12" Tree otherwise the Post @ The South Base. EXCAVATED all around Post and found only stones. Excavated Post as corner and replaced 1/2" B&C w/ STANDED RAMP Set 14T #25837 in W. Side 10' Cherry 32° 20.62 in N. Side 18 Oak 116° 50.50 3. 11 3.75 Cherry 296° 22.70 5. 11 6.35 Oak 274° 44.15 5. 11 24" Oak 274° 44.15

ST1

G-1

Post Set by Joseph Wampler DS.
in Nov. 1825 with the following
Twp. N. Bdy 174 44' 2 W. of Post
Hopen 2nd 55920 143

G-13 White Oak

ORIGINAL Post Set by

IN 18 103

Twp 9 N 70 1/2 E 103

3) Corner Used by T. J. Brown Co. Surv. in

Jan. 1858

Aspin 12" 55920 143 Lts - No other

W. H. Rose Co. Surv. Found old Post in

OCT 1895 and proved from S. W. Corn

Sec. 34 White Oak.

1st W. Witness W. Oak 8" N 80 E 85 1/4

G-13 Twp R 2 E 3/4" Pipe 5 11345 Cap

3 25837 in S. Bank Drainage Ditch

NST in E. Side 18" Maple 5 Twp 12.3'

NST in W. Side 12" White Maple 168 6.15

NST in S. Side 18" Maple 90 34.65

NST in N. Side 8" White Maple 134 35.25

3/4" Pipe 4 11345 11345 268 114.81

DC
PIN

3 sep 94

(3)

6) Ac-74 E. Enger. In 53 47 pg 75
I did field work for this section
Set 3/4" Pipe on Township line using
Fence corner 6.65 S. 1/4 Lin.
4 1/4 Con to South to East. Post.

NST 25837 in 26" Oak N 80 E 21.15'
N 1/4 " 24" Twp. Map. S. 37 1/2'
N 1/4 " in 26" Oak W. 10.00'
1/4" Iron Pipe S. 6.65'
3/4" Iron Pipe (G-13 Twp. R 2 E) E. 114.81'

7) Ac-132 E. Antelope Oct 88 L-5 pg 81-82
pg 5 850-851 pg 840-843
Same Run built across as Iron &
Searched 3 Ed. 3/4" Pipe. Accepted
1 1/2 Cor & Capped 1142

NST 25837 in S. Side 26" Oak 270° 10.00'
S Side 27" Oak 30° 30.90
↓
E Side 30" T. Maple 182° 33.45
1/4" Iron Pipe in Fen Cor S 180° 6.65'
3/4" Pipe 4 11345 11345 268 114.81
at Drainage Ditch East 95'

← S. S. d. Drainage Ditch
20' E " " "

ST-1

DC
JP

16 APR 94

(4)

F-3 X

Original Post - By J. Wampler AS

10 Nov. 1925

TRM 4 588 1/2 E S

TRM 11 155 E 9 1/2

COVERED Used By A.T. Drake Co. Survey

10 Jan. 1882

TRM 4" 1588 3/4

TRM 5" 1584 1/2

1) Alt 74 D.C. Wood Dec 88 47 pg 72

Ed 3/4" Pipe at Very Old E-S Fm Cor

Spike in 8" Cherry NE 19.5'

Spike in 20" Oak East 13.5'

Spike in 6" Cherry SE 19.3'

2) Alt 132 E. Kuncil 122 Jan 89 25 pg 783-791

Same Mon. & Distances as Item 1

1) R. H. H. May 1992 46 pg 1207

No mention from or witnesses

2) R. H. H. Sept 93 47 pg 23

No mention from or witnesses

Searched APPARENT Area of Corner

& Found 3/4" Pipe Buried in Deep Spoil

Bank in Very Very Old E-S Fence Line

Probed entire Area (All Dry Muck) & Found

Nothing More, Accepted Pipe as Perpetuation

of Corner & Set STANDARD Bore Cap on Top

Set 1/4" 25837 in E Side 5 1/2" Maple 346 At 8.57'

" NW " 11" Cherry 47 19.25

" N. " 6 3/4" Oak 86 13.31

" E. " 7 1/2" Cherry 136 19.57

North To & Drain 15'

West To & Drain 10'

(2)

F-2 X

0.16 Set in Original Government Survey

ST 1

DLC

T 400

16 April 74

(5)

CORNER Set By T. J. Brown's Survey, Dry Co. Survey.

in Oct 1879

Rope 20' N 85° E 25' E

West Parallel


8.16 chs.

SKETCH OF

Brown's Survey

NORTH

2 d Rd

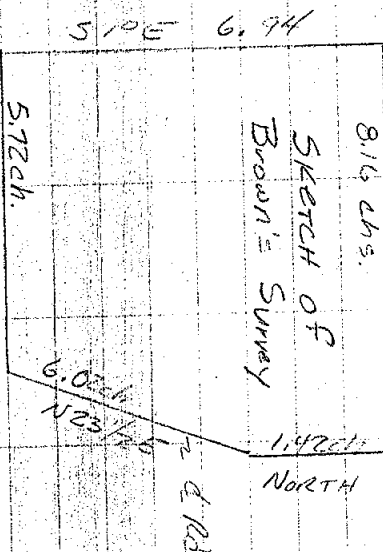

N 89 1/4 E

(3)

Act 74 O. Boes Aug 72 L 2 pg 29

Fd 1/2" Iron

S 20° E 6.47' N 0.11 W. Side 12" Cherry

S 67° W 7.61' N 0.11 S. Side 12" DbL Oak

N 85° W 34.86' N 0.11 S. Side 16" Hickory

DLC

JP

16 April 74

(5)

(7) Can recovered by this Surveyor during Super Collision Probe - Jun 1988
 Fd. 1/2" Iron w/loop # 13574 & 13575
 Same witness as item 4 except allow to N 47° E # 25837

(8) Act 132 O. Boes Aug 72 L 1 pg 465

Set - more find - as item 4

(9) O. Boes Apr 73 L 1 pg 742 Same as item 4.

(10) B. Runkle 21 Oct 1883 L 5 812-815 Super Coll.

more find as item 4

(11) M. Runkle L 6 pg 321 May 1890

No mention made of witness

(12) R. Runkle L 6 pg 1207 Nov 1892 L 7 pg 29 & 43

Some more witnesses as item 4

Searched Area of Corner & Fd. 1/2" Bar Iron # 13567 in rotted off base of Anchor Post
 Excavated around & accepted B&C and Set STANDARD B&C on Top.

Fd. N 77° E 25837 in W. Side 16" Cherry Stump 180° 6.47'

Set " " in N. Side 5.75' 22" DbL Oak 120° 6.81'

" " " " 4.5' 17" Hick 276 24.91'

" " " " 5.9' 17" Hick 276 24.91'

" " " " 2.1' 1/2" Hick 335 31.37'

" " " " 8" Oak 86 50.25'

F-1 4

ST 1

DC
JP.

23 APR 94 (6)

1) NOT SET IN ORIGINAL Government Surveys

2) Carlson Set Ey T.J. T. Corner
in J. 1853Holding 10" 374 1/2 1946
W. end 22" N21W 44 3/4 6 1/2

3)

4) At 74 R. Engel June 88 17 71

Field where Ey myself during Super Col.

Set Cor. in Plowed field midway between

Sec. Corners on Top Line

1 1/4" Pipe

N4T #18998 in 15" OAK East 113.49'

N1T #25837 in 15" OAK NW 178.3'

N4T #25837 in 12" OAK 5455' 201.35'

IC 5R Conc. Mon. (F-13 - 241 R2E) East 151.80'

5) At 132 B. Angel 04 93 15 31 314-315,

220-321 For Super Col. Same Mon & with
25 Item 4

Searched Area and Fd 1 1/4" Pipe on
field. Survey line as recorded
Tied only existing occupation (N-S
1/4 line from which ends Fractional
1/4 mi South of Township line)
Occupation agrees within 2' E/W
of Monument. Accepted 1 1/4" Pipe
as Corner and Capped with PA345
PS #25837 Cap.

Set N4T #25837 in S. Side 2 1/2" OAK 92° 118.50'
" " " " N. Side 18 1/2" OAK 179.15'
" " " " N. Side 17" OAK 117° 202.00'
Conc. Mon - F-13 - White OAK 92° 151.80'

F-13 White OAK

Fd Conc Mon Iron Bent 8" Out to Road

Cut Off Top 10" & Capped

N4T #25837 in S. Side 21" OAK 270° 334.0'

N4T #25837 in W. Side 17" OAK 189.49° 91.65'

N4T #25837 in W. Side 13" OAK 46° 24.41'

N4T #25837 in N. Side 13" OAK 164.95° 76.44'

1 1/2" Pipe F-1 Stock Br. dge 272° 151.80'

ST 1

E-3 X

Original Post Set By J. M. Loughlin in Nov 1825

W. OAK 22 586 E 30

E. OAK 17 546 W 30

Conek Used By A. Jackson Co. Surv.

in Jan 1854 Vol 2 Page 209

W. OAK 22 586 E 30

W. OAK 17 546 W 30

③

As 74 A. Williams Jan 80 16 p 50

Ed. 1/2" iron rod @ N-E-W Anchor Post

N4T 10" W. H. Cherry 505° E 14.39'

N4T 30" OAK 545 W 25.28'

N4T 14" Wild Cherry East 25.52'

⑤ Cor. Recovered By D. C. Howard during Survey

3011. Project Ed 1/2" Iron @ Anchor Post

Same witnesses except they are the

114T #25337

DLC
P11

T700

30 May 94

⑦

⑥ As 132 M. Hobbs July 87 15 p 1136

Same men & witnesses as item 5

⑦ As 132 R. Hall Oct 93 17 p 29

Same men & witnesses as item 5

Ed. 1/2" Iron @ N. Post Totten Down

Anchor Post - EXCAVATED All around

and found Much Broken Drain Tile

Replaced 1/2" Bar w/ 5/8" DRUMS B&C

N4T #25337 in W. Side 13" Cherry 1650 14.19

" " " N. Side 8" W. P. Cherry 840 25.14

" " " SE Side 36" OAK 2380 25.38

" " " North Side 22" OAK (DB) 2920 29.95

ST 1

E-Z 4

Overlaid Post see By J. Wampler DS in

Nbl. 1825

B. Oak 9 553 E 8

" " 5 N 40 W 26

③ Corner Used By A. Jackson Co. Survey

1 N Aug 1846 with some witnesses

as GLO

③

② Act 74 D. Clifford Job 88 LT pg 65 (Spec. L)

FD 2" Pipe @ fence corner - matching

probably remains of GLO Brg. fence.

N 47° 25337 in 15" Cherry East 2820'

" " 20" B. Oak 5450 7.50'

" " 30" B. Oak West 8.40'

LARGE Swamp N 49 W 40' (Prob. GLO Brg. fence)

③ Act 132 E. Hulse / Oct 93 LT pg 28

Some more 5 witnesses as 1 fence 4

RLC

Pg 11

780°

30 May 94

③

Scanned at area of corner and FD.

2" Pipe @ 4 way from Corn. - Swamp

Suspected of being any Brg. fence

Also a insect entomology Detail noted

Excavated all around and found

general ruin of the mill / Fence Post

to trace. Excepted 2" Pipe at corner

Set STAMPED BSC AP in Pipe.

Set N 47° 25337 in inside 20' Oak 236° 7.46'

" " " " 5 side 14' Hick 250° 11.09

" " " " 5 side 38" Oak 218° 7.46

" " " " W. side 11" Hick 0° 26.56

S 47° " " S. side 13" Cherry 90° 27.33

571

E-1

Original Post Set By - Wampler D.S. in

Nov. 1855

Int. N. Edy 296 LKs (1944) W. of Post

Tam 7 557W 19 1/2

" 8 546 E 41 1/2

DE-13 White Oak

Original Post Set By

18

Tam. 5 N58E 17

Tam 6 N45W 38

D.S. in

E-13 White Oak used By A. Jackson

(O. W. 1. in June 1854 with same

witnesses as C.L.C.

W. A. Korie Found old Post of E-13 White

Oak in Oct 1895 and used it

(9)

Met 74 N. Edy Jun 83 27 pg 26

1 1/4" Pipe (good) Base of first corner post to 500 ft. - as usually no corner post here

1/2" Post removed at 400 ft to 500 ft

1/5" Pipe 505 E 32.5'

20' Maple N130E 13.25'

18' Maple N45W 39.15'

1 1/4" Pipe (E-13, Tam-R25) East 195.36'

Copied (also Felling)

Copied R. pe NAC

N 1/2 in Top 24" Maple Swamp 24° 13.60

N 1/2 E. Side 12" Maple 330° 32.66

N 1/2 S. Side 14" Maple 82° 30.85'

E-13 T2N R2E

Copied R. pe N. E. W. N. Jackson Post

24" Maple 170° 32.45

21 1/2" Maple 290° 28.90

Copied R. pe (E. 1. T. N. R. W. 268° 195.36'

N 1/2 N. Side 8" Maple 240° 31.55

N 1/2 W. Side Top 18" Maple 170° 32.15

N 1/2 N. Side 10" Maple 100° 31.19

STI

D-3

Original Post Set By J. Wampler DS in

Nov. 1825

W. Oak 16 N 88 1/2 W 22

W. Oak 12 N 72 E 17

③ Corner Used By A. Jackson, Co. Surv.

in Jan 1854 161 E P 207

W.O. 18 N 88 1/2 W 22

W.O. 12 N 72 E 17

B

B. Searched at apparent location of Cor. 3 Feb. 1/2" B&C (Gutkunst) in drainage ditch. Traversed all of Sec. 5 and tied in all occupation lines that could remotely be related to position of corner and found that B&C was best possible location for Cor.

DC
RM

3 Sep 94

(10)

C. 1 1/4" X 5' Galv. Pipe & Ties cap

PS 25037 in drainage ditch

NET 25337 in N. Side 20" Willow 79° 11.70"

E. Side 9" Oak 24° 16.85"

E. Side 19" Oak 37° 13.20"

S. Side 14" Poplar 82° 21.00"



ST1

D-2

1) Not Set in Original Government Survey

2) Corner Set By A. Jackson Co. Surv.,

in Aug 1846 Vol 9, 209

N. 01° 12' 6" N 56 1/2° W 22 1/2' (14.85)

Y. 01° 12' 8" N 13 1/2° W 16 1/2' (10.91)

3) Searched @ Apparent location of
Cor & Fed Square off Wood Post
in Depression 2' S. of E-W Fence
on tree line E-W, Examined
and found ring of stones around
post. Accepted wood post as
perpetuation of corner & set standard
Post on N. Side

11

C 3/4" X 24" Steel Rod and 19345
COP 19325037 @ Barwood Post

1942

1947 25837 N. Side 22° 04' 271° 12.85'

N Side 18' 04" 89° 20.17'

E Side 18' 8" 104° 380° 30.09'

S. Side 5" Maple 56° 43.86'

ST 1

D 1

① Not Set in Original Government Survey

② CORNER SET By U.H. Reed Co. Surveyor

in Oct 1895 Raised on oil

UNRECORDED SURVEY in the N.W. 1/4

1/4 of Section 5 - Field Book 15 pg 26

See Iron Spout or Gas Pipe 3 inches (1933)

West of S 1/4 Post Sec 32 White Oak

W Oak 30" N25E 301165 (198.66)

Hick 3 516 3/4E 2841165 (187.44)

Rowe also set Gas Pipe at S 1/4 Cor

Sec 32 White Oak

W Oak 30" N31 3/4W 321465 (211.86)

W Oak 24" S88 3/4E 453 1/2 Lbs (299.31)

Rowe also set Gas Pipe at the S 1/8 Cor

of S 1/4 Sec 32 White Oak 20.1 lbs (192.25)

East of S 1/4 Cor Sec 32

③ Cor. Used By J. Yokum Trimmer & Surv.

in 1880 with Norman Mon or witnesses

Measured East 195.36' To Standard Cor

(STANDARD BAR in Ave. Post Hole)

Measured. N25E 198.66' To Oak Stump Row

Measured N32W 211.9' To Oak Stump Row

Measured N32W 211.9' To Oak Stump Row

From STANDARD SURV

PC
PUN

14 May 1994

12

① AL 74 R. Lester Jun 73 L2 pg 471

Soy 1/2 Cor on Township & Feen Line Survey

N 1/4 1/2 side 10" Cherry 140' to E 6.53

N 1/4 1/2 side 5" Elm 105W 70.20'

N 1/4 E Side 8" Cherry NE 46.12'

② Corner recorded by D. Ch. Ford During

Super Civil Project Aug 83

Fd. Fern Post + Hole Dist To N 1/4

N 1/4 E 5" Cherry NW 53.3 273.05

N 1/4 1/2 Cherry NW 1/4 56.53 Dist To S 1/4

N 1/4 1/2 Cherry NE 46.12 158.55

N 1/4 in Tree SW 1/4 16.2'

③ PA 132 R. Lester Jun 73 L1 pg 337

Some other stuff - Item 4

④ PA 132 N. Lester Jun 73 L5 pg 95 some dist.

⑤ Fd. Anchor Post Hole Set Bank Corp

Set N 1/4 25837 in S Side 8" Cherry 318.42 53.30

Set N 1/4 25837 in E Side 12" Cherry 190 16.20

Set N 1/4 25837 in S.E. Side 20" Oak Cherry 38 46.12

Set N 1/4 25837 in E Side 18" Cherry 0 56.58

Set N 1/4 25837 in E Side 10" Thompson 314.31

Set N 1/4 25837 in W Side 6" clump Cherry 28.57

Set N 1/4 25837 in W Side 6" clump Cherry 28.57

Set N 1/4 25837 in W Side 6" clump Cherry 28.57

Set N 1/4 25837 in W Side 6" clump Cherry 28.57

Set N 1/4 25837 in W Side 6" clump Cherry 28.57

Set N 1/4 25837 in W Side 6" clump Cherry 28.57

Set N 1/4 25837 in W Side 6" clump Cherry 28.57

Set N 1/4 25837 in W Side 6" clump Cherry 28.57

Set N 1/4 25837 in W Side 6" clump Cherry 28.57

ST 1

C-3

① Original Post Set By J. Wampler DS in NW
1825

W. OAK 12 N29E 44

W. OAK 8 S80W 54

②

③ Act 74 O. Boss L3 pg 117 May 74

Fd. 1/2 Iron

NTSAD 21.10 Nail 5/5 40' Oak

STOE 31.21 Nail 5/5 14" Oak

N15E 77.35 Nail w/5 10" Oak

④ Act 132 O. Boss NW 1 73

Same mon & witnesses as item 3

⑤ Act 132 A.W. Hines Jul 79 L3 pg 93

Same mon & witnesses as item 3

⑥ Act 132 G. Young Jul 82 L4 pg 538

Same mon & witnesses as item 3

DC

PM

21 May 94

(13)

⑦ Act 132 A.W. Hines Jul 89 L5 pg 1137

Same mon & witnesses as item 3

⑧ Act 132 R. Helsel NW 91 L6 pg 828

Same mon & witnesses

1 Boss witness Remaining

Set Wood Hub on Fen Line, NW Rd &

One Remaining Nit

Acro lade Nit in S. side 18" Oak N2E 110° 31.21

" " in N. side 5" Oak N2E 210° 32.58

" " S. side 7" Elm 110° 25E 33.12

" " W. side 6" Hick 160 43.27

30 May 94

Witnesses of R. Helsel to Blue Stone

Marking location of Boss Fd. Iron

Fd. Stone & replaced w/stranded Rd

Acro lade Nit in SW side 20" Oak N2E 110° 30.71

" " W side 8" Hick. N2E 155° 62.26

" " N side 6" Oak N2E 110° 32.10

" " S. side 10" Elm N2E 290° 33.47

STI

DL
3P

T60

23 April 94

14

C-2

① Original Plat Set By J. Wampler 1851

Nov. 1825

W. OAK 16 N45E 39

W. Oak 36 South 3

② No mention in records of County Sur.
Use Bu. W.A. Kame Co. Surv. books

reference to an old unrecorded

Survey in the N.W. 1/4 of Sec. 2

in field notes found in Field Book.

is page 26 in Oct 1845

③ J. Vocum in "J. Vocum's Book" used

corner in 1878 with no mention of

of noon or witnesses. (This is

probably the old unrecorded Survey

mentioned by ROWE

④ Act 74 J. Voc. Apr. 74 13 pg 17

Set 1/2" Iron 2 Fen I.T.

East 1489 Nov. 1 5/8 100' Oak

North 1242 Apr. 1 E/S 10' Oak

West 2572 Nov. 1 2/5 12' Hick

⑤ Act 132 O. Bess Nov. 75 L 2 pg 125
Same noon & witnesses as first⑥ Act 74 R. Steadman May 1880 L 9 pg 66
Set 1/2" pipe at a found piece of
Oak found surrounded by broken
crackers.

12" Hick North 1021'

3" Cherry West 26.25'

10" Hick East 14107'

(Det cites Bess' L&C but we didn't
find 1/2" iron and says it seems to
be all slightly different location.

F&L Steadman 1/2" Pipe & Cap

H2.

F&L Acobade N45° 5. Side 14" Cherry 270° 26.44

" " " " E Side 13" Hick 40° 13.30'

" " " " W Side 24" Oak 28° 34.21'

" " " " N Side 11" Hick 88° 14.29'

DLC

JD

23 Apr 94

B

C-1

Original Post Ser By J. Williams DS

in Nov. 18th Int. N. Rd 323 W. of Post

Hole 13 SSEE 33

" 17 S62W 34

33
66
198

C-13 White Oak-

Original Post Ser By

in 13

W. Oak 30 N 57W 6

Maple 9 N 58E 22 1/2

198
211.78 D.S.
28.44
16
39.6
66
14.65
132
132

③ W/A Low Co. Surv used 1952 Corner

+ 1895 (Field Book 15 p. 26) OS

Old Post found with no mention of witnesses

④ J. Yocum's Book used

Corner in 1878 w/ no mention of witnesses

⑤ Act 74 K. Lister Jan 73 42 pg 471

Fd 1/2 Ripe Oak @ Int. of Farms S.E. W.

N4T in W. Side 36" W.D. NNE 18.95

N4T in N. Side 10" Hick. Wpt 16.49

N4T in N. Side 8" W.D. Spd 6.09

② Act 132 K. Lister Jan 73 41 pg 457

Sawd more & with @ 140' S

③ Act 132 R. Williams Aug 80 44 pg 133

Sawd more & with @ 140' S

④ Act 132 R. Williams Aug 86 45 pg 135

Sawd more & with @ 140' S

Fd. 1/2 Ripe @ E-W-N Fan Cor

EXCAVATED all around

Found NOTHING More.

Set Standard Bar & Cap on Top.

Set N4T #25837 in W. Side 26" Sup Oak 27.1649

Set N4T #25837 in NE Side 10" Hick 300' 16.49

Fd N4T #18993 in N. Side 8" Oak 25.9 6.15

Set N4T #25837 in W. Side 8" Hick 158 14.15

SW Cor Sec 32 T2N R2E

Set Standard Bar & Cap in Ant. Cor Hole

Set N4T #25837 in S. Side 12" Hick 98' 40.45

Set N4T # " in W. Side 36" Hick 190' 39.91

Set N4T # " in NW Side 14" Hick 217 49.93

Set N4T # " in SE Side 72 Sup. Oak 23.8 27.54

N14 Cor Sec 5 T1N, R2E West 213.20

G-3 Cont.

ST1

B. Antell/H At 132 Surge 188, 189

L

P

776, 777, 782, 783, 784, 785
 786, 787, 788, 789, 790, 791
 791, 792, 793, 794, 795, 796
 797, 798, 799, 802, 803, 804, 805
 824, 825, 826, 827, 828, 829

DC

J.P.

T40

16 Apr. 94


(16)

WITNESS	To	From	1" Pipe	4" Pipe	40.02'
Set No. 1/4" # 25837 in	13"	Hick	34°		40.02'
Set No. 1/4" # 25837 in	23"	OAC	88°		39.60
Set No. 1/4" # 25837 in	32"	Wol.	152°		44.55
Set No. 1/4" # 25837 in	18"	OAC	164°		39.93
1/2" Box w/ cap # 27456 JHM	40°				33.00
40' Large Strump	20°				63.6

EXCAVATED 8' x 3' x 2' Hole 30 May 94
 Found nothing more

17

	173-21-76.5"	Memo	
--	--------------	------	--

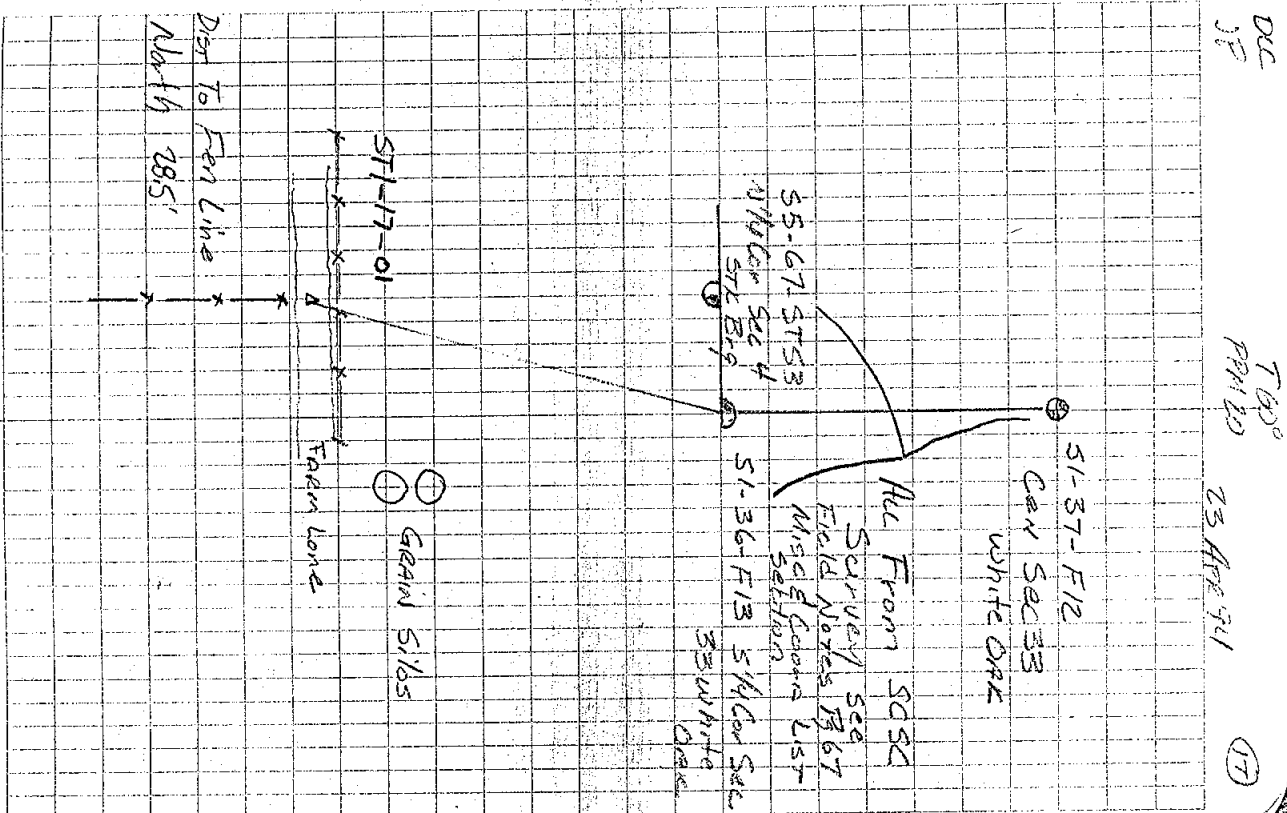

70°
 7942714 May 94

PDC
 RM

Search for old Trans. FS
 521-64-DC7 (Recov 525 Survey, repla ced w/ 1/2" Box & 3525837 Trans. R Cap)

ST 1

DKR To 521-63-DC6 (from 525 Survey) 60d 3pt

675.97
 521-65-DC8 (from 525 Survey) 6d 3pt

1327.75
 521-64-DC7 (Recov 60d 4' 3" B&B Dev. (20.5' at 4' Dr To 3203")

521-65-DC8 (Recov 1/2" B&B 5' 5" w. 64' Box (22' N of 4' Field Drive) (RP set 2' long)

521-18-001 (Set 6' 3pt in 1/2" B&B - Occupation. Levelling)

521-18-002 (Set 6' 3pt in 1/2" B&B - Occupation. Levelling)

521-18-003 (Set 6' 3pt in 1/2" B&B - Occupation. Levelling)


521-18-004 (Set 6' 3pt in 1/2" B&B - Occupation. Levelling)

521-18-005 (Set 6' 3pt in 1/2" B&B - Occupation. Levelling)

521-18-006 (Set 6' 3pt in 1/2" B&B - Occupation. Levelling)

521-18-007 (Set 6' 3pt in 1/2" B&B - Occupation. Levelling)

521-18-008 (Set 6' 3pt in 1/2" B&B - Occupation. Levelling)

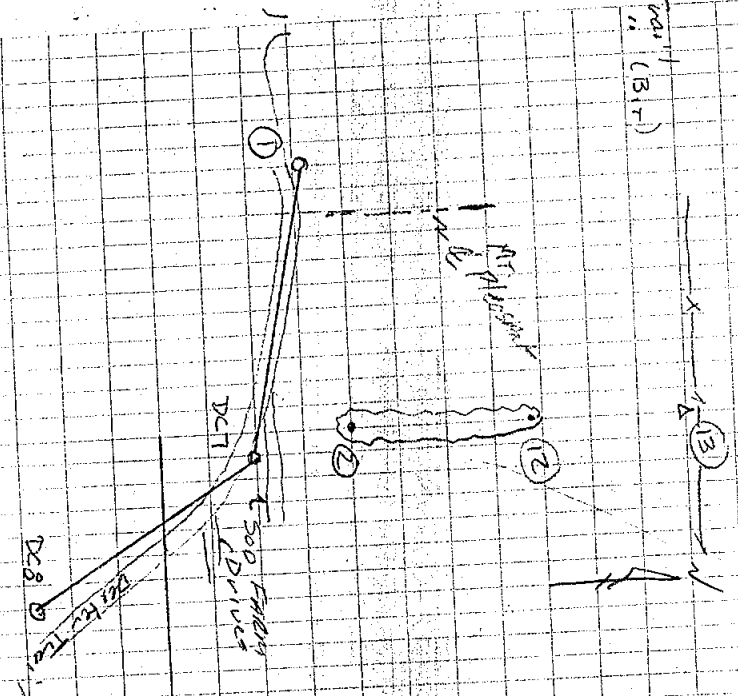

HD = 721.03

269° 58' 00"
 96° 01' 30"

Mean 209-51-01.5"
 119-51-23 209-50-58
 276-00-25 219.772
 299-51-13 721.03
 90-00-08 721.03

Mean 150-05-22.5" V 51.511
 60-05-40 150-05-15 V 22.6'
 290-00-25 150-05-25 V 22.6'
 240-05-33 150-05-25 V 22.6'
 90-00-08 150-05-25 V 22.6'

Mean 150-05-22.5" V 51.511
 60-05-40 150-05-15 V 22.6'
 290-00-25 150-05-25 V 22.6'
 240-05-33 150-05-25 V 22.6'
 90-00-08 150-05-25 V 22.6'

Mean 150-05-22.5" V 51.511
 60-05-40 150-05-15 V 22.6'
 290-00-25 150-05-25 V 22.6'
 240-05-33 150-05-25 V 22.6'
 90-00-08 150-05-25 V 22.6'

Mean 150-05-22.5" V 51.511
 60-05-40 150-05-15 V 22.6'
 290-00-25 150-05-25 V 22.6'
 240-05-33 150-05-25 V 22.6'
 90-00-08 150-05-25 V 22.6'

Mean 150-05-22.5" V 51.511
 60-05-40 150-05-15 V 22.6'
 290-00-25 150-05-25 V 22.6'
 240-05-33 150-05-25 V 22.6'
 90-00-08 150-05-25 V 22.6'

DL
P/M


T 700

14 May 94

19

ST1

RE	ST1 - 18-01		
BS	521 - 64 - DCT		
FS	ST1 - 13-03	RP Set 1/2" BS in N-S (Tree line East of Church 18' N. of Lone Cherry	
BS D	00-00-05"		
FS D	168-52-16	168-52-11"	
BS R	180-00-20		08"
FS R	348-52-25	168-52-05"	
BS D	90-00-28	1	
FS D	258-52-31	168-52-03"	
BS R	270-00-11		05.5"
FS R	178-52-19	168-52-08"	
	Neon 163-52-07"		
Dist → BS	1851.75	1851.74	564.408 564.469
ZA BS	90-07-45		
	269-52-15		
SD		HD	1851.72"
DST	To FS 1184.99/198	M. 361.181/1183	
ZA FS	270-47-42		
	89-12-20	HD	1184.83"

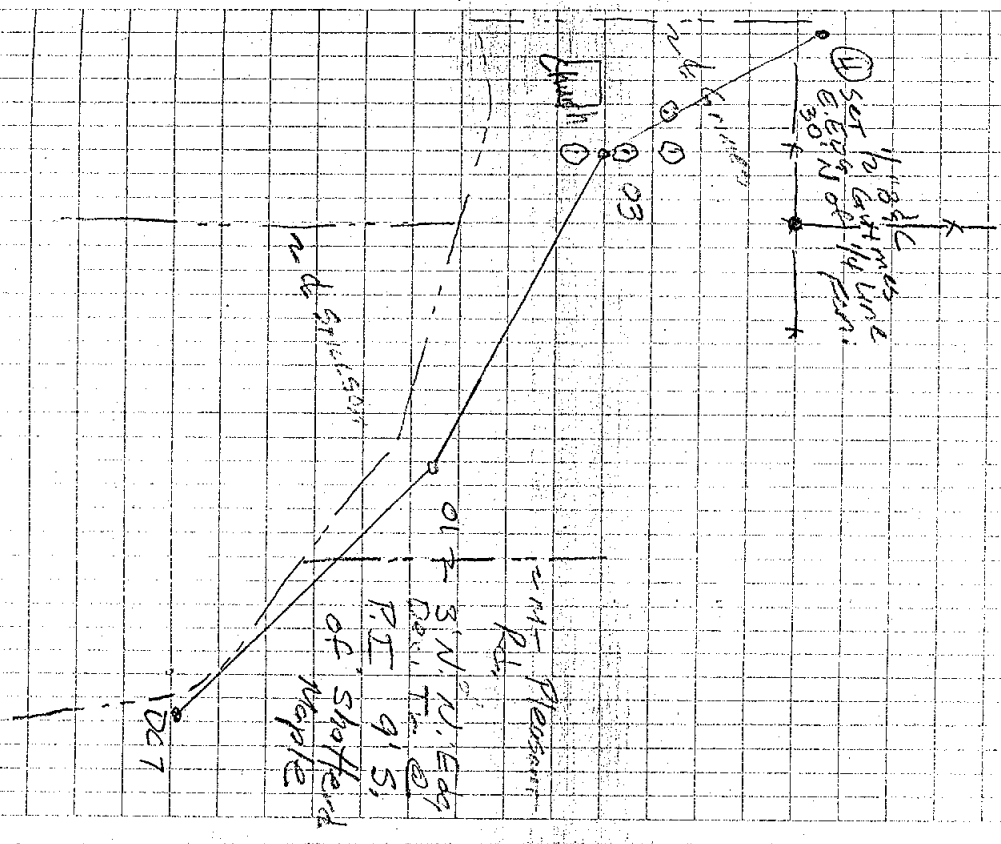


ST1

DLC
PIN

19 May 1994 20

xe	57-19-03	
BS	57-18-01	
FS	57-20-04	
BS D	0° 00' 00"	
FS D	225° 21' 16"	225° 21' 10" ✓
BS R	180° 00' 00"	21' 08" ✓
FS R	45° 21' 06"	225 21' 08" ✓
BS D	90° 00' 26"	
FS D	315° 21' 56"	225 21' 21" ✓
BS R	270° 00' 20"	21' 22.5"
FS R	135° 21' 41"	225 21' 21" ✓
Mean	225-21-15 ✓	

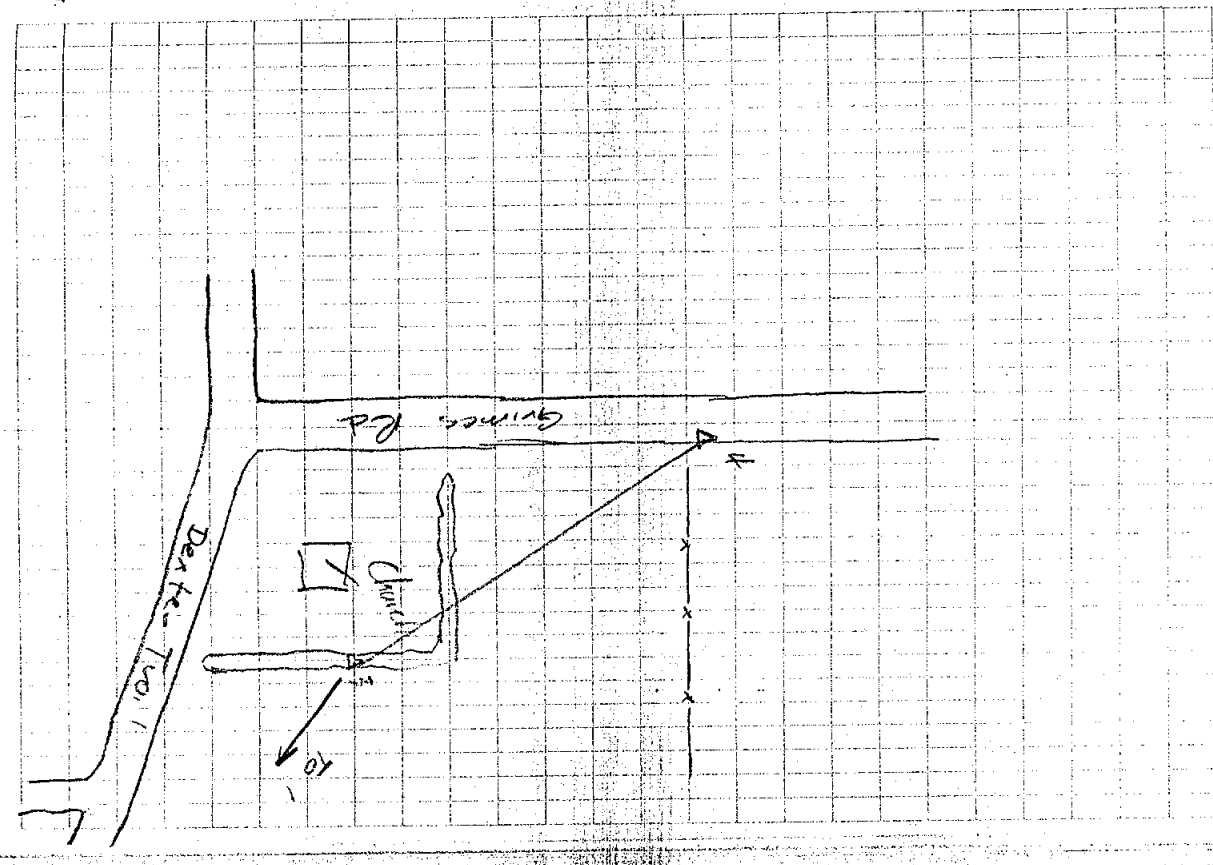

ST1

Ne ST-20-04

BS ST-19-03

F5, ST-21-05 (5' 1/2" B&C 4' E. of G.O. 1. @
7.1. Grimes Rd

F5, ST-21-06 (C-2 with Gas 5' 5" TIM RZE)
1/2" pipe 8' Cap 11' 10" See P 14

BS D 00-00-14 7"

F5, D 196-17-01 196-16-48

F5, D 299-15-17 299-15-02

BS R 180-00-15

16-17-17 196-17-02 ✓ 196-16-54 ✓

119-15-25 299-15-10 ✓ 299-15-065 ✓

BS 60-00-14 196-16-57 ✓

F5, 2 266-17-11 196-16-58 ✓

F5, 2 240-00-01 196-16-59 ✓

16-17-00 196-16-56 ✓ F5 299-15-06

MEANIES, 196-16-56 ✓ F5 299-15-06

DIST → BS 700.54 -35 213.525 .527

2 → BS 2270-32-40 89-27-20

SD HD 700.51 ✓

DIST → F5 337.87/.86 102.98/.181

2 269-59-25 90-00-33

SD HD 337.86 ✓

DIST → F5 1827.81/.82 557.122/120

2 269-41-48 90-13-12

SD HD 1827.78 ✓

DLC


Q11

TK60

APP 27

Dec 22 - May - 1994

21

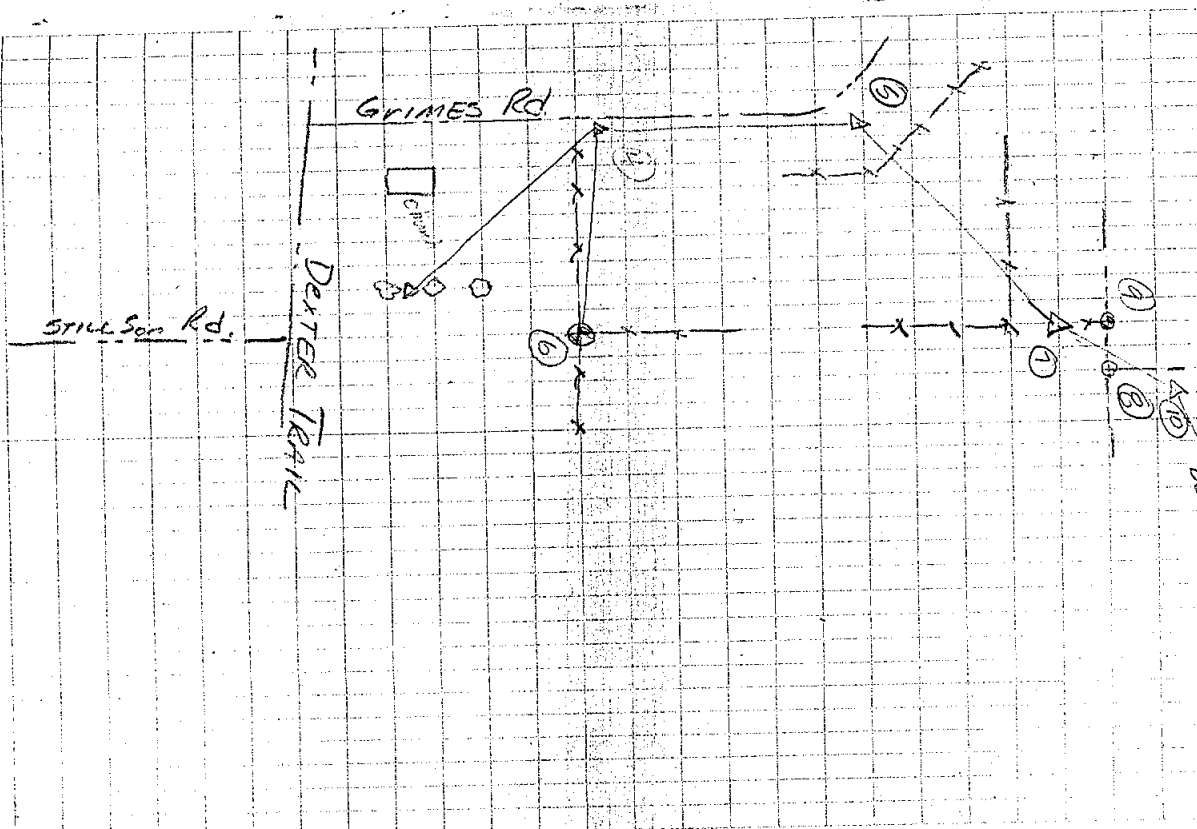

ST 1

TE ST - 21-05

BS ST - 20-04

FS ST - 22-07 (TTP Set 1/2" B¹C

BS D 00-00-27

FS D 231-36-24 231 - 35-57 W

BS W 180-00-14

FS W 51-36-11 231 - 35-57 W

BS D 60-00-08

FS D 231-36-18 231 - 36-02 W

BS D 240-00-00

FS D 11-36-02 231 - 36-02 W


MEAN 231-36-00 ✓

DLC RUN

T 75°
PPM 27

22. MAY. 1994

22

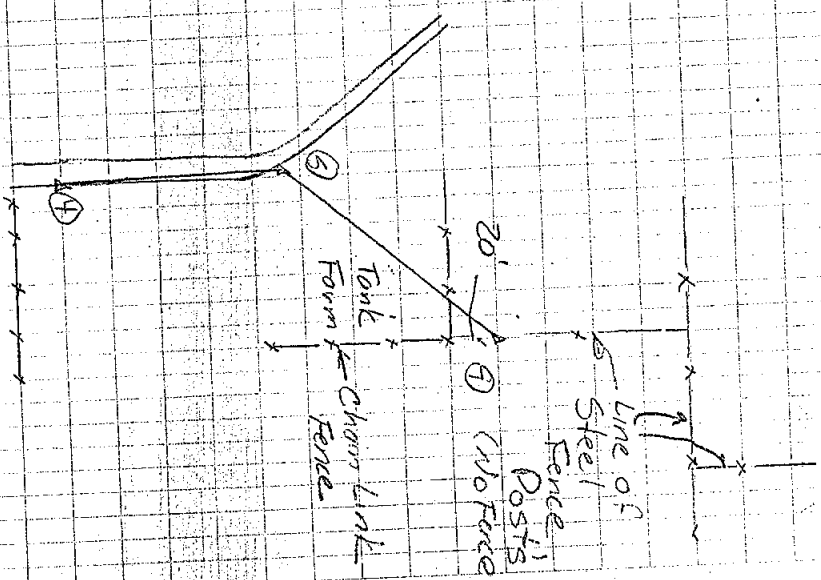

ST-22-07

57-21-05

ST - 23-08 (C-13) NICOLE JOE [redacted]

ST - 23-09 CC-11 NKCE JEP 11

field

BS 2	00-50-23
------	----------

FS, D	189-44-85	181-73-92
-------	-----------	-----------

5	0	135	36	07	132	01	71
---	---	-----	----	----	-----	----	----

F-33	D	120	103-11314
------	---	-----	-----------

140-00-63

12.7	69.44	66	201
------	-------	----	-----

[illegible]

000118

		B-8
		60-2

22	201	01	31	042	7	3
----	-----	----	----	-----	---	---

[illegible]

1000 11 CH

1.5.11.13 2.1.23A/23C

AD = 858.70

34 1.33
30 1.10
80 25/750

AD = 263.31

48.000	30/20	1	7
650	10	1	7

$$47 \rightarrow 160.28$$

351 AA / AE 042.00291.0389

11

DLG
WFD


Y. S. L.

1944-1945

23

F3, Mean 189-43-52.5

Mean 135 - 37 - 44.5

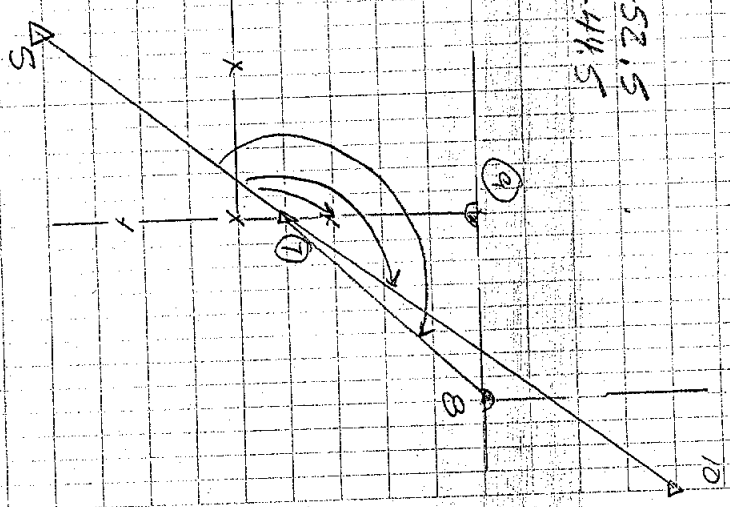

ST-23-10
 ST-22-07
 521-60-02 (1800 Pst Super Collected)

ST1

DLC
 P/M

T80°
 PPM 27 2.1 May 94 24

Recovered 600 gpl 3' N.
 of N.E. dy BIT 114' E
 of Cen Sec 32 T2N, R2E

Swan Rd.

02

BS 0 00-00-28
 20-00-15
 178-06-03
 178-05-35 ✓
 178-06-34 ✓
 BS 0 180-00-35
 178-05-35 ✓
 178-06-34 ✓
 BS 0 358-00-08
 369-15-53
 178-05-20
 238-05-44
 178-05-24 ✓
 178-05-24 ✓
 MEAN 178-05-29 ✓

801.57/.57
 244.319/325
 267-56-55
 92-03-05
 HD = 801.05



26

ST 1

Ne ST-25-12

BS ST-18-01

FS, ST-21-13 (FD, ST, Wood Post in Depression Sec pg. D-2)

BS D 359-59-52

FS D 90-05-20 90-05-28

BS D 180-00-01 26

FS D 270-05-25 90-05-24

BS D 60-00-55

D 150-06-22 90 05 28

BS D 240-01-20 26

D 330-04-24 90 05 24

Mean 90-05-26

Dist To BS

Z 270-06-00 89-54-00 269-54-30 90-05-20

FT 1600.13/.13 1017.87/.85

M 487.72/.123 310.247/.247


SD 1600.12 1017.86

HD 1600.12 1017.86

DC
PUN

21 May 1994

(26)

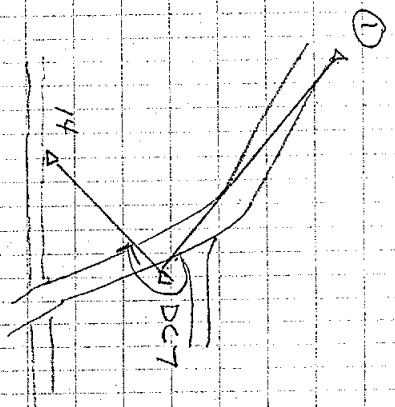

T DC7

BS 01

FS 14 (150' Wood Post in Depression Sec pg. D-2)

BS D 180-00-10

D 56-13-43 236-13-33

BS R 000-00-01

R 236-13-40 236-13-39

BS D 60-00-15

D 296-13-50 236-13-35

BS D 240-00-17

D 116-13-54 236-13-38

Mean 236-13-36

Dist To FS

Z 269-48-00 90-12-00

FT 663.98/.98

M 202.381/.382

SD 663.98

HD 663.97

27 571

Chock Bismarck

571-23.10

571-22-01

521-60-02

DIST TO BS 92-04-05
269-48-53 92-04-05
92-04-05

M 90-11-30 801.57/.56

FT 3156.48/.48 244.318/.318

M 962.055/.095 801.56

SD 3156.46 801.04

HD 3156.44 801.04

BS 571-21-05

BS 571-22-07

FS 571-20-04

DIST TO BS 270-17-20

20 270-07-20 89-42-40

M 89-52-40 1827.79/.80

FT 858.79/.79 557.115/.113

M 261.760/.760 1827.76

SD 058.79

HD 858.79

DLC T60
210 1000 22 30 140-1 34

Ne 571-19-03

BS 571-20-04

FS 571-18-01

DIST TO BS 90-49-25
269-10-50

M 90-35-30 90-49-30
1185.01/.02

FT 700.58/.58 361.186/.195

M 213.536/.537 11-85.01

SD 700.58 1184.89

HD 700.54

BS 571-18-01

FS 571-27-15

BS 80-00-13

FS 236-25-48

BS 180-00-21

FS 56-25-55

BS 236-25-34.5

M 236-25-34.5

SD 89 62-20

HD 1851.74

54

The Courts

✓ 571-25-11 (wood) Wood Street ✓

B5 571-18-01 (Recor. Br. Sub. B5C in

F5 571-28-16 (G-3 STAND PLACED BEC in Place of Blue Stand)

600-00-41

157-58-40	157-58-00
-----------	-----------

B5 180-00-52
58-52

R. 337-~~24~~³⁸⁻³⁴ 157-58-00

Adm. 1

Dist 10 BS.

22 2695750

90-02-10

ET 1945.31.81

M	593.083 / .083
---	----------------

1945.30

55

Chair

3.62


DLC
P5N

PN

T 70
PPM 27
30 May 94

28

See pg. 13

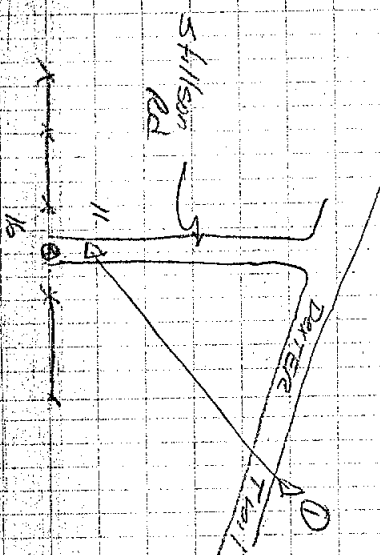

(29)

The Occupation S. Line Sec 5

ST 1

DC
DN

790
PPH 27 18 Jun 94

(29)

T ST 1 - 18-001

B5 ST 1-64-DC7

FS ST 1-29-17 (Line Sec 5 Set 605 in Area B.)

B5 240-00-25

288-55-28 48-55-03

60-00-32

108-55-28 48-54-56

B5 000-00-33

D 48-55-15 48-54-43

B5 180-00-32

e 228-55-31 48-54-59

Mean 48-54-55"

Dist To FS

2D 89-55-00

270-05

89-55

FT 1671.61 / 1671.61

M 509.508 / 509.508

SD 1671.60

HP 1671.60

T ST 1-64-DC7

B5 ST 1-18-001

FS ST 1-29-18 (Ed. PK. & Dexter Trail)

B5 D 000-00-50

210-40-54 210-40-04

180-01-00

30-41-05 210-40-05

Mean 210-40-045

Dist To FS

2D 90-34-10

R 269-26-20

M 90-34-00

FT 721.35 / 721.36

M 219.870 / 219.870

SD 721.35

HD 721.31

30

ST1

DCL
JP

13/Aug 94

T

18

B5

7 (107)

F5

19

X

180°

10'

T

19

B5

7 (107)

F5

20 Bend in Creek

X

270

40'

T 524-64-DE7 (107)

103-571-18-01

103-571-30-21 Bend in Creek

P3D 000-00-16

283-07-06 283-06-50

180-00-10

103-07-10 283-07-00

Dist to 920 FS

Mem 283-06-55

FT 898.63 / 898.63

M 273.905 / 273.905

31

ST-1

1944. Contract + Monumentation Surveyor

Notes & Abbreviations

CCS = Clifford Land Surveys

16156 Turner Rd.

LAWS. M: 48906

LS17) 4184 7266

Instruments for all field work

Wild T-2 Theodolite

Wild DI-1000 EDM SN 6007

owned by Enger Surveying &

Engineering

Abbreviations

DLC-Dove Clifford PS 25837

J.P. Jason Porter Survey Tech

PUN Phil Norden LS17

Set Standard B&C - Set $\frac{3}{4}$ " x 24"

Smooth Steel Bar and Yellow

Plastic Cap imprinted PR345

PS 25837

Set N&T - Set Rod spike and yellow

plastic witness tag PS 25837